

FUZETEC

PPTC Resettable Fuse



COMPONENTES ELECTRÓNICOS ELCO, S.A.
Cl. de Can Ribes, 10 - 08520 Les Franqueses del Vallès
Telf. 93 879 01 94 - elcobcn@elcocomponentes.com


2020
PPTC
Resettable Fuse
Catalog



Automotive



Internet of Things



Industry 4.0



FUZETEC

Circuit Protection Solutions for Today & Tomorrow's Industries


C ontents

| | |
|-------------|--------------------------------------------------|
| I | Overview |
| P.2-P.3 | Company Profile |
| II | Fundamental |
| P.4 | How Does the Resettable Fuse Work |
| P.5 | PPTC Selection Guide |
| III | Application |
| P.6 | Automotive |
| P.7 | Smart Application/lot |
| P.8 | Industry 4.0 |
| P.9 | Energy |
| IV | Radial Leaded |
| P.10-P.11 | FRX |
| P.12-P.13 | FRX90V |
| P.14-P.15 | FRU |
| P.16-P.17 | FRT |
| P.18-P.19 | FUSB |
| P.20-P.21 | FRG |
| P.22-P.23 | FHT |
| P.24-P.25 | FHE |
| P.26-P.27 | FRHV |
| P.28-P.29 | FRV |
| P.30-P.33 | FRVL |
| V | Surface Mount |
| P.34-P.35 | FSMD2920 |
| P.36-P.37 | FSMD2016 |
| P.38-P.40 | FSMD1812 |
| P.41-P.42 | FSMD1210 |
| P.43-P.44 | FSMD1206 |
| P.45-P.46 | FSMD0805 |
| P.47-P.48 | FSMD0603 |
| VI | Strap |
| P.49-P.51 | Strap Series |
| VII | Low Rho |
| P.52-P.53 | Low Rho FSMD1206 |
| P.54-P.55 | Low Rho FSMD0805 |
| P.56-P.57 | Low Rho FSMD0603 |
| P.58-P.59 | Low Rho FSMD0402 |
| VIII | Customized Products |
| P.61 | Automotive Products Energy & Telecom Products |
| IX | Appendix |
| P.62-P.67 | Cross Reference |
| P.68 | Thermal Derating |
| P.69 | SMD Product Solder Reflow Recommendations |



FUZETEC

Committed to provide continuous circuit protection solutions to today's and tomorrow's electronic and electrical industries.

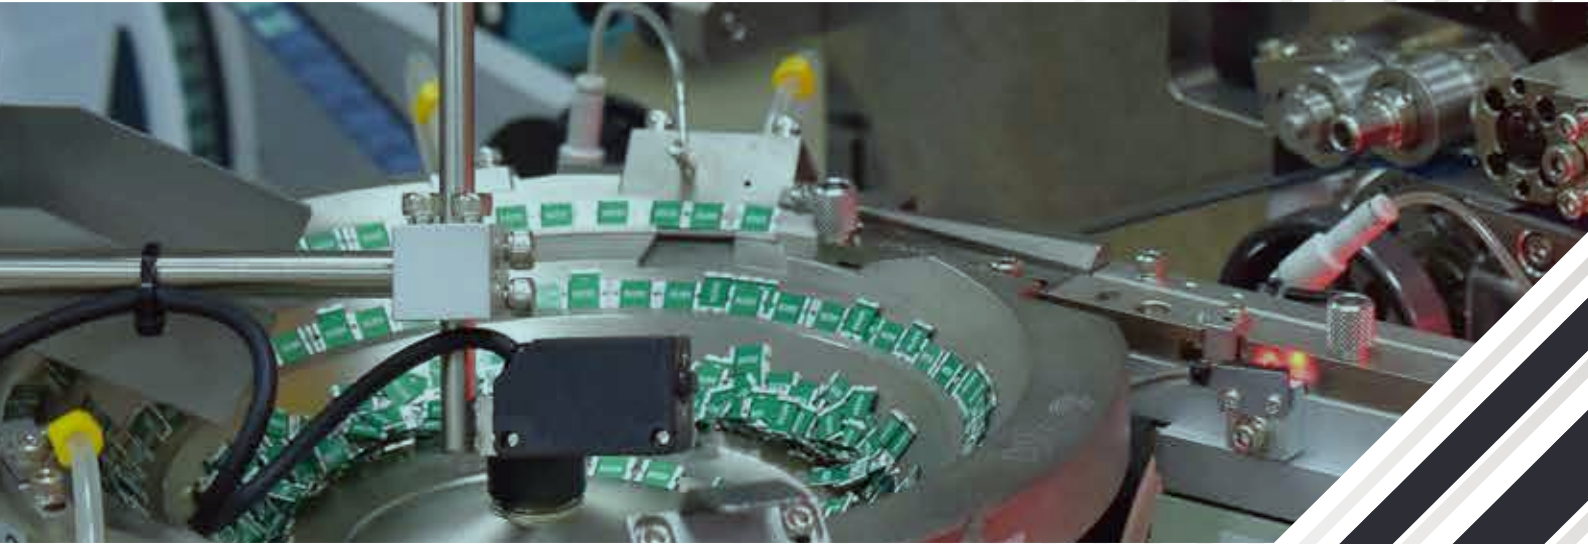


Fuzetec Technology

Founded in 1999, as a world leading PPTC resettable fuse manufacturer and designer, Fuzetec Technology Co., Ltd. (FUZETEC™) is committed to provide continuous circuit protection solutions to today's and tomorrow's electronic and electrical industries.

Fuzetec is a public company in Taiwan, Taipei Exchange Market (stock code: 6642)

Products & Application

With the most advanced Positive Temperature Coefficient (PTC) conductive polymer technologies, FUZETEC™ offers a wide variety of Polymeric PTC resettable fuses to fulfill the needs of modern demanding high-tech applications. They include, but are not limited to: Automotives, Smart Application & IoT, Industrial Control , Energy Solutions etc.

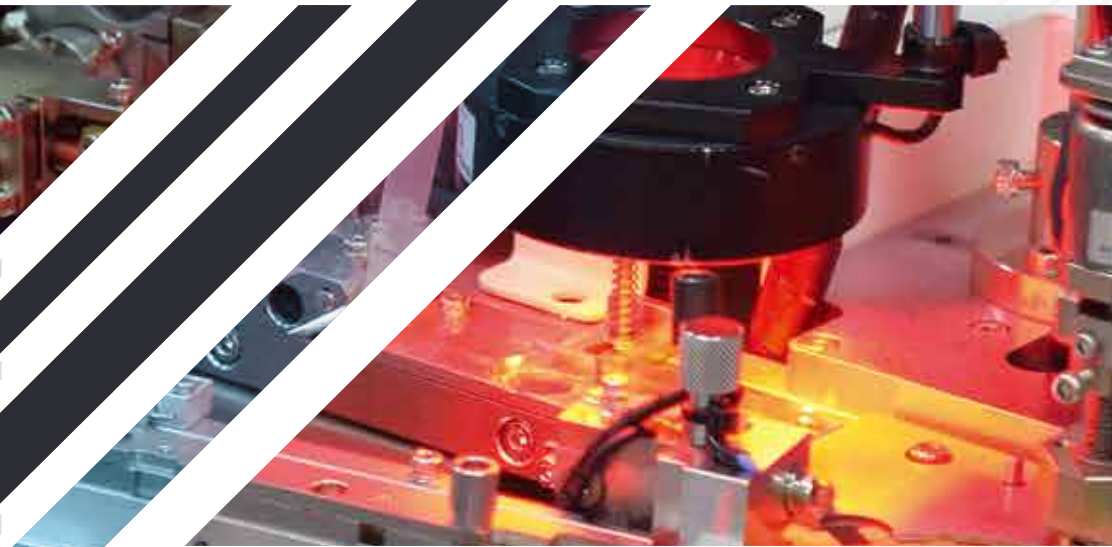

Safety, Quality and Customer Satisfaction

With third party approvals (UL, C-UL and TÜV), FUZETEC™ products are ensured to provide long lasting safety and performance. From product design and development, through manufacturing and quality control to delivery and shipment, Fuzetec Technology strictly implements IATF16949, ISO9001 and ISO14001 quality standards to assure its products' quality and consistency. Besides, as our long term involvement in the Auto industry, all FUZETEC™ automotive PPTC products are set to be tested and qualified using the AEC-Q200 specification for electronic components used in Auto industry. With continuous improvement, we are committed to provide top products and services to better satisfy our customers' needs. We strongly believe that excellent partnership between customers and us are the best and the only route to achieve success in tomorrow's competing business world.

Fuzetec Patents & Formula

FUZETEC™ holds 57 self-developed PTC patents (US x 24, TW x 21, CN x 12) and continue applies multiple patents each year. These expertises of polymeric PTC material and product engineering, grants us the flexibility and advantage on new product development. With our own patented PPTC formula, we can custom the product electrical characteristics to meet customer specific requirements and design PPTC device structure for special application. Fuzetec's technical know-how and engineering expertise altogether, is your solution provider for circuit protection.


NOTE : All Specifications subject to change without notice.

How Does the Resettable Fuse Work



FUZETEC™ resettable fuses are designed and made of patented novel polymeric PTC material in thin chip form, developed solely by FUZETEC™. With electrodes and leads attached on both sides, it is placed in series to protect a circuit. At “normal operating condition” the device remains at an extremely low resistance (milli-ohms) and allows the electrical current to flow through it without any restriction. When overcurrent conditions occur, the polymeric PTC material heats up and its resistance increases sharply. Such a sharp resistance increase (to an insulated status) cuts off the current in the circuit, and consequently protects the element and device in the circuit. Upon fault current being removed, the resettable fuse cools down and its resistance drops to the original extremely low value. The resettable fuse is “reset” and allows the current flow through the circuit again.

PPTC in Circuit

The typical PPTC application is to be used as a series component in a circuit.

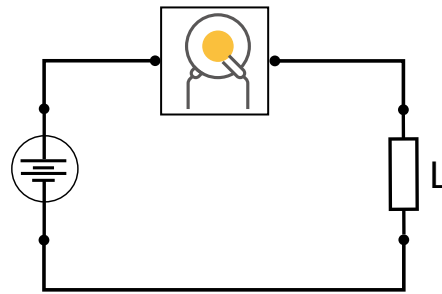


How It Works

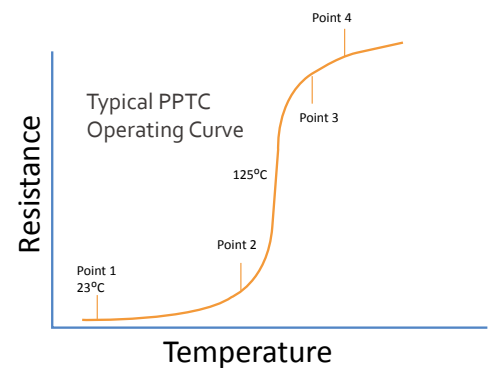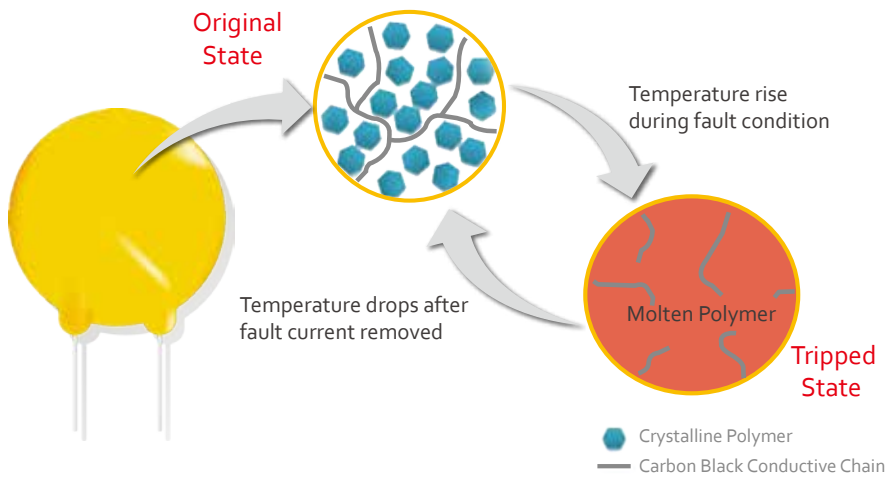

Basic Structure

- Epoxy Coating
- Solder Layer
- Nickel Plated Copper Foil
- PTC Element

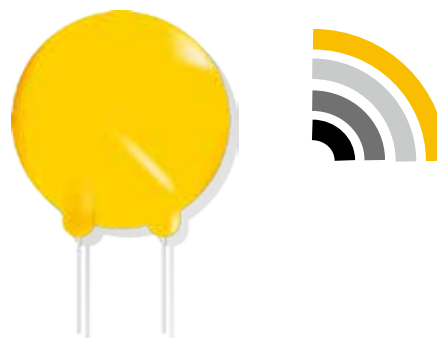


the PPTC Selection Guide

SELECTION GUIDE

1 Circuit Parameters

Determine your circuit parameters



- Circuit Operating Current
- Maximum Operating Voltage
- Maximum Interrupt Current
- Maximum Ambient Operating Temperature

2 Voltage & Current Rating

Select a Fuzetec PPTC Device with proper electrical characteristics



V_{Max}/I_{Max} are the maximum voltage/current PPTC devices can withstand without damage

Hold Current (I_H) is the maximum current which a PPTC device will keep in low resistance state at 23°C

Trip Current (I_T) is the minimum current which a PPTC will trip at 23°C

Check the electrical characteristics table to ensure the PPTC device can match the circuit parameters

3 Ambient Temperature

Evaluate the maximum circuit operating ambient temperature



PPTC device is temperature sensitive, check the Thermal Derating table to verify the performance of PPTC device you select in Step 2 under different ambient temperature

4 Time to Trip

Determine Time to Trip for desired protection capabilities



Time to Trip is the amount of time that a PPTC device need to transfer low resistance state to high resistance "Tripped" state under fault condition.

Make sure the PPTC device to provide the desired protection capabilities

5 Check Dimension

Fuzetec provide a various types of packages and different dimensions, use the dimension table to compare the PPTC device you selected and your application's design consideration.

Glossary of Terms


- I_H : Hold Current - Maximum current at which the device will not trip at 23°C still air.
 - I_T : Trip Current - Minimum current at which the device will always trip at 23°C still air.
 - V_{Max} : Maximum voltage device can withstand without damage at its rated current.
 - I_{Max} : Maximum fault current device can withstand without damage at rated voltage (V_{Max}).
 - P_d : Maximum power dissipated from device when in tripped state in 23°C still air environment.
 - R_{MIN} : Minimum device resistance at 23°C.
 - R_{Max} : Maximum device resistance at 23°C.
 - $R1_{Max}$: 1) Maximum resistance of device at 23°C measured 1 hour, after tripping for all product series;
2) or after REFLOW soldering of 260°C for 20 seconds for all SMD series;
3) or after WAVE soldering of 260°C for less than 5 seconds for all DIP series.
- Special Note :
- In the event that TWO of the above three conditions were experienced once each, the acceptance criteria will become 1.3 times of $R1_{Max}$.
 - In the event that ALL of the above three conditions were experienced once each, the acceptance criteria will become 1.5 times of $R1_{Max}$.

Automotive

Fuzetec has been partner of major automotive industry companies and OEMs for more than 10 years. We provide surface-mount, radial leaded and custom shaped chip/disc type PPTC resettable fuses for vehicle electronic equipment overcurrent circuit protections.

Automotive devices that operate under rigid environment need robust and reliable circuit protections, therefore our automotive product lineup are set to satisfy AEC-Q200 standard for electronic components used in the automotive industry.

Automotive PPTC Resettable Fuse Application

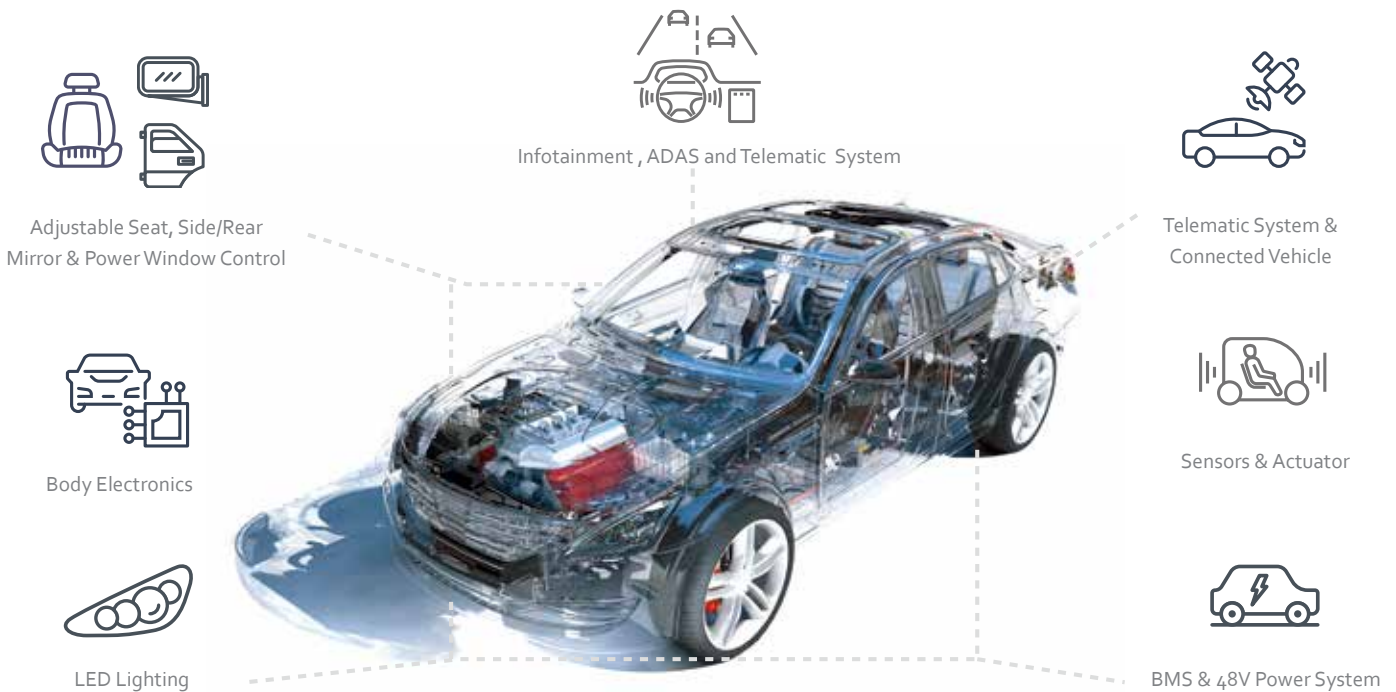

DC Motor Protection
Fuzetec Radial Leaded & Custom Shaped PPTC are ideal for DC motors employed in power operated automotive applications

Infotainment & ADAS System
As the vehicle system evolved to more intelligent and more complex application, Fuzetec offers a wide range of PPTC devices for application from In-Car multimedia to Advanced Driver Assistance System

48V Vehicle System
Fuzetec PPTC devices has developed test plan following AEC-Q200 guidelines to test for suitability and reliability for automotive industry's Latest voltage system & applications.

Feature

- IATF-16949 & AEC-Q200 Auto Industry Standard
- Applicable Resettable overcurrent circuit protection
- RoHS Compliant, Lead-Free and Halogen-Free(HF)
- Resistance range binned and sorted available
- Customized products Available


Application

- DC Motor & Motor Circuit Protection
- Sensors & Actuator
- Car Infotainment System, ADAS and Telematic System
- Automotive Body Electronics
- 48V Power System, BMS & Automotive Backup Batteries

Smart Application & IoT

From Network Infrastructure to IoT node & gateway; from Telecommunication Network to personal wearable devices. Fuzetec provides, a full range of overcurrent circuit protection solutions with its compact size, flexible design and cost competitive Polymeric Positive Temperature Coefficient (PPTC) resettable fuses.

For more than 10 years, Fuzetec has been providing test proven products to assist telecom equipment to meet test requirements of power cross and power induction surge defined by ITU-T, UL and Telecordia GR-1089 safety standards.

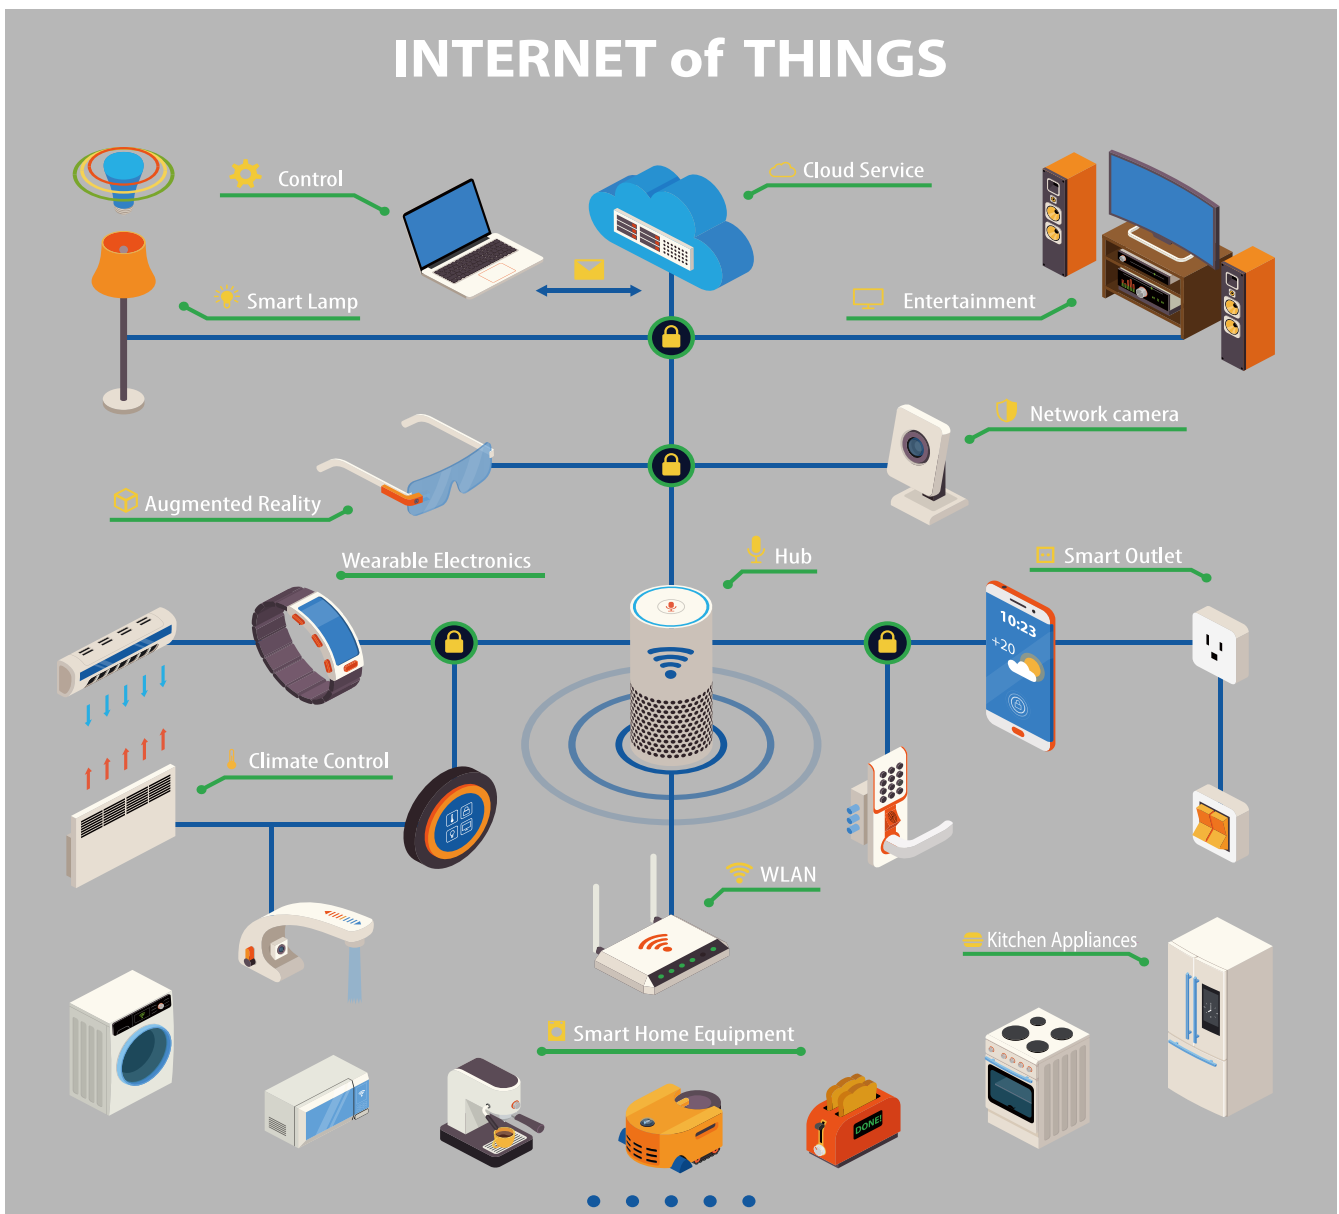

Feature:

Function-oriented design (High hold current/Fast trip time/High Ambient Temp/High Rated Voltage Current)
 RoHS Compliant, Lead-Free and Halogen-Free(HF)
 Resistance range binned and sorted available UL60950, UL497A, ITU-T K20/K21 & GR-1089 Compliant

Application:


Wearable & Smart Home Devices
 IoT Node & Gateway Devices
 Gaming & Entertainment
 Data Center & Network Solution
 Line Voltage Protection

Industry 4.0

Industry 4.0 is the current industrial transformation with automation, data exchanges, cloud, cyber-physical system, Big Data, and autonomous industrial techniques.

Fuzetec specializes in providing circuit protection with high reliability to Industrial, Transportation, and Medical markets under harsh and critical environment.

With the emerging trends of automation, electrification and digitalization of industrial technology, such as facility monitoring system, digital power supply, intergrated security system and internet connectivity. Fuzetec solution meets industrial standard and offers reliable circuit protection for these industrial applications against electrical faults for 24/7 industrial operation.

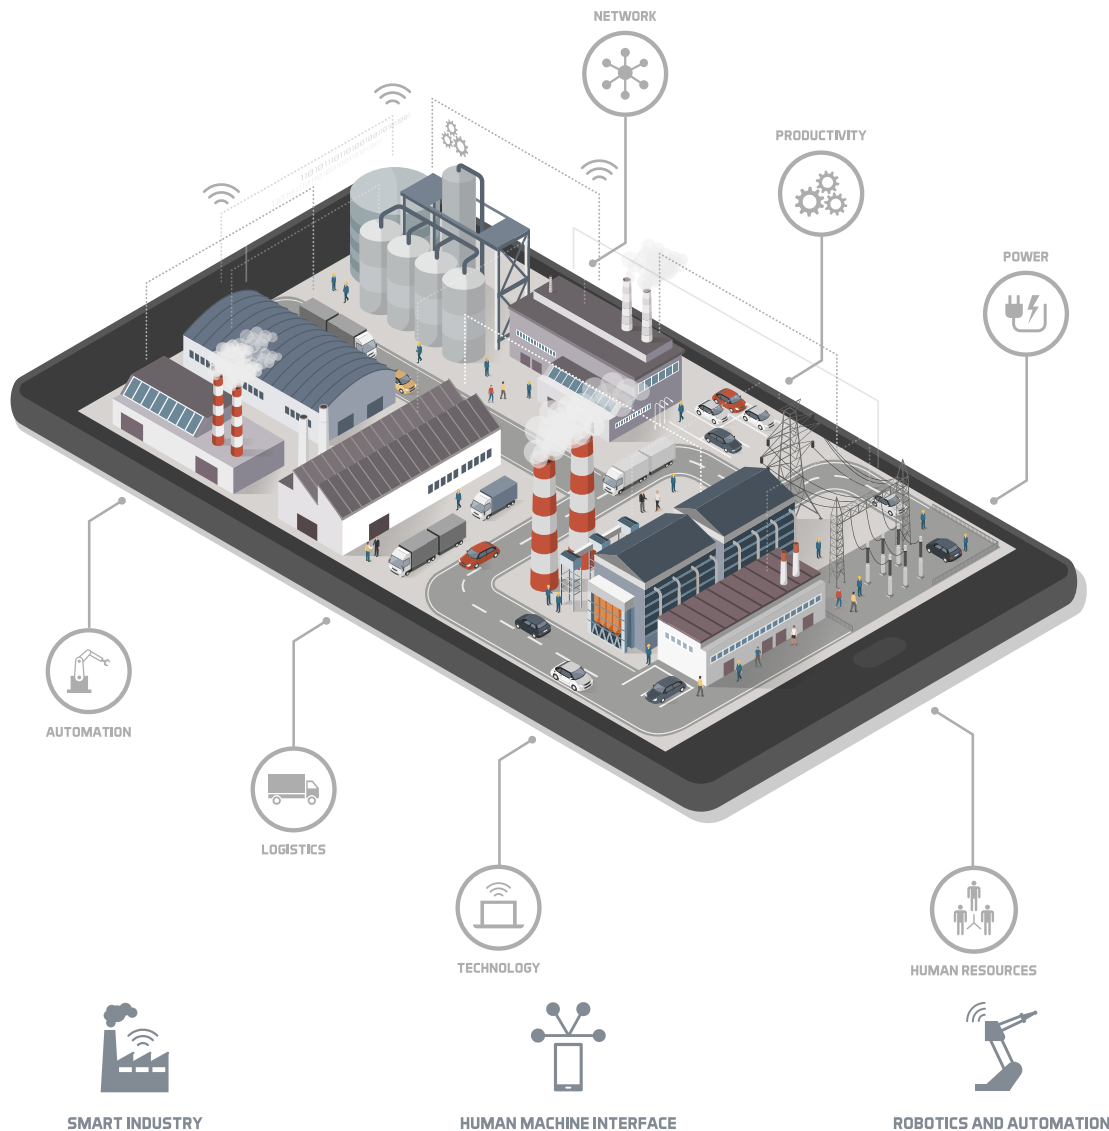

Feature

- Resettable overcurrent circuit protection
- RoHS Compliant, Lead-Free and Halogen-Free(HF)
- Resistance range binned and sorted available
- Function-oriented design (High hold current/Fast trip time/High Ambient Temp/High Rated Voltage Current)


Application

- Automation & Control System, Industrial Machinery,
- Power Supply, Security Surveillance, Semiconductor Equipment, Fleet Control System Medical Equipment

Energy

The global renewable energy market is driven by government support. Improving battery technologies and reducing of initial cost has boosted the demand of battery energy storage systems. Integrate renewable sources with energy storage system can provide solution to on/off grid flexibility to reduce peak demand charges.

Fuzetec, a reliable partner for major Li-ion battery manufacturer in Asia, Europe and America, has developed a comprehensive line of circuit protection solutions for potential overcurrent and overheating condition. Fuzetec SMD, Low Rho SMD/Strap and custom PPTC disc devices offer flexibility for battery application with different performance characteristics.

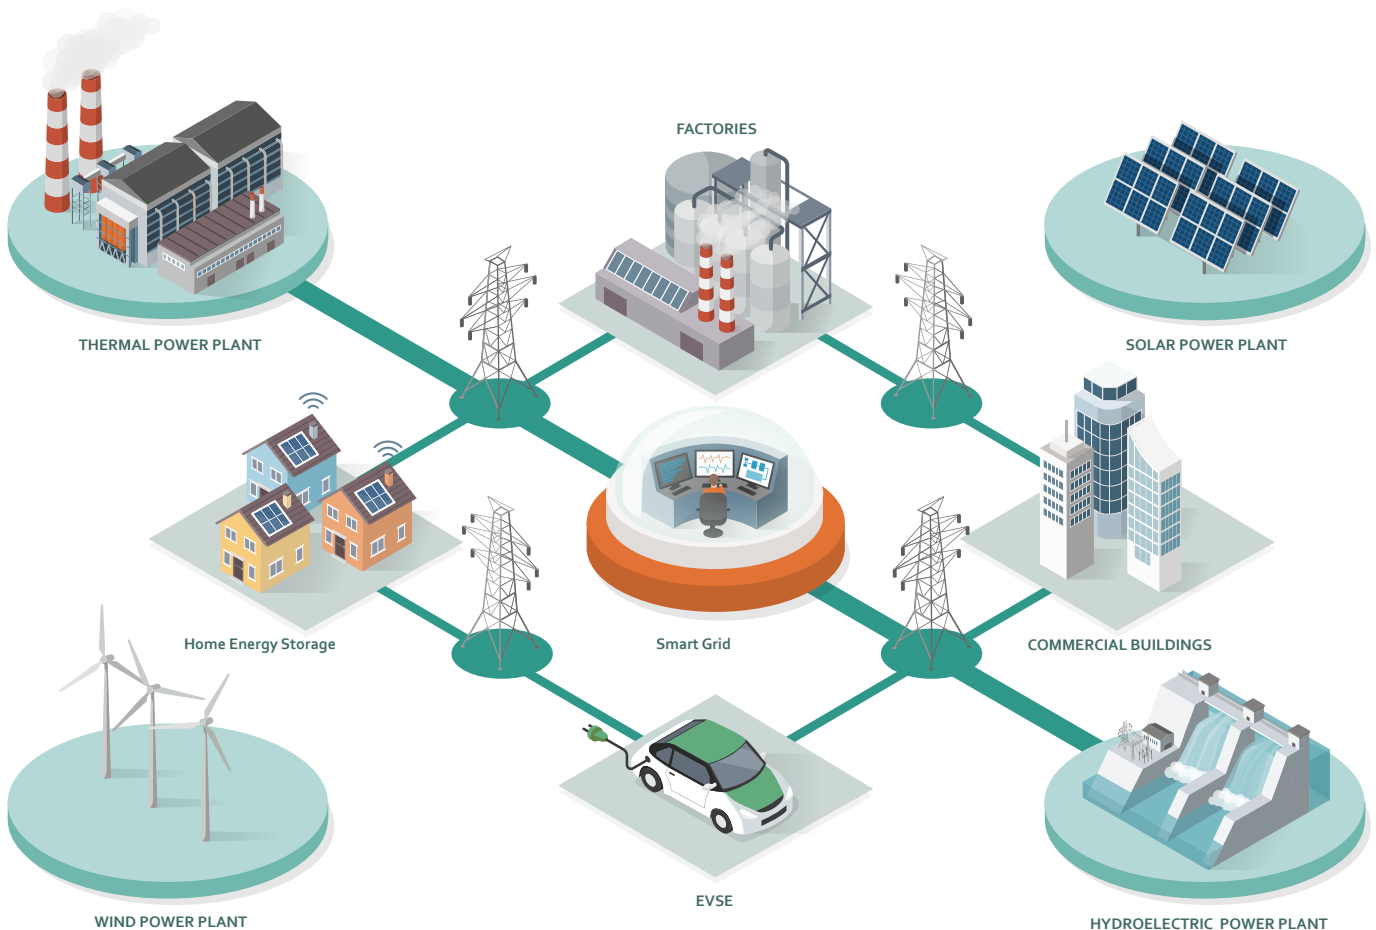

Feature:

- Ultra Low Resistance for Better Battery Life
- Resettable overcurrent circuit protection
- RoHS Compliant, Lead-Free and Halogen-Free(HF)
- Resistance range binned and sorted available

Application:

- Lithium Ion Battery Cell and Packs
- Battery PCM
- Smart Grid
- Solar Energy DC/AC Inverter

FRX Series



Application

Wide variety of electronic equipment

Product Features

Low hold current, Solid state Radial-leaded product ideal for up to 60V_{DC}



Operation Current

0.05A ~ 3.75A

Maximum Voltage

60V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50004084) |



SVHC Compliant

Electrical Characteristics (23°C)


| Part Number | Hold Current | Trip Current | Max. Time to trip | Max. Current | Rated Voltage | Typ. Power | Resistance | |
|-------------|--------------|--------------|-------------------|--------------|---------------|------------|------------------|-------------------|
| | | | | | | | R _{MIN} | R _{1MAX} |
| | | | | | | | Ohms | Ohms |
| FRX005-60F | 0.05 | 0.10 | 5.0 | 40 | 60 | 0.26 | 7.30 | 20.00 |
| FRX010-60F | 0.10 | 0.20 | 4.0 | 40 | 60 | 0.38 | 2.50 | 7.50 |
| FRX017-60F | 0.17 | 0.34 | 3.0 | 40 | 60 | 0.48 | 2.00 | 8.00 |
| FRX020-60F | 0.20 | 0.40 | 2.2 | 40 | 60 | 0.41 | 1.83 | 4.40 |
| FRX025-60F | 0.25 | 0.50 | 2.5 | 40 | 60 | 0.45 | 1.25 | 3.00 |
| FRX030-60F | 0.30 | 0.60 | 3.0 | 40 | 60 | 0.49 | 0.88 | 2.10 |
| FRX040-60F | 0.40 | 0.80 | 3.8 | 40 | 60 | 0.56 | 0.55 | 1.29 |
| FRX050-60F | 0.50 | 1.00 | 4.0 | 40 | 60 | 0.77 | 0.50 | 1.17 |
| FRX065-60F | 0.65 | 1.30 | 5.3 | 40 | 60 | 0.88 | 0.31 | 0.72 |
| FRX075-60F | 0.75 | 1.50 | 6.3 | 40 | 60 | 0.92 | 0.25 | 0.60 |
| FRX090-60F | 0.90 | 1.80 | 7.2 | 40 | 60 | 0.99 | 0.20 | 0.47 |
| FRX110-60F | 1.10 | 2.20 | 8.2 | 40 | 60 | 1.50 | 0.15 | 0.38 |
| FRX135-60F | 1.35 | 2.70 | 9.6 | 40 | 60 | 1.70 | 0.12 | 0.30 |
| FRX160-60F | 1.60 | 3.20 | 11.4 | 40 | 60 | 1.90 | 0.09 | 0.22 |
| FRX185-60F | 1.85 | 3.70 | 12.6 | 40 | 60 | 2.10 | 0.08 | 0.19 |
| FRX250-60F | 2.50 | 5.00 | 15.6 | 40 | 60 | 2.50 | 0.05 | 0.13 |
| FRX300-60F | 3.00 | 6.00 | 19.8 | 40 | 60 | 2.80 | 0.04 | 0.10 |
| FRX375-60F | 3.75 | 7.50 | 24.0 | 40 | 60 | 3.20 | 0.03 | 0.08 |

Thermal Derating for PPTC Device at Various Ambient Temperatures


| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 158% | 138% | 119% | 100% | 90% | 81% | 70% | 60% | 50% | 36% |

Typical Time-To-Trip at 23°C

- A = FRX005-60F J = FRX075-60F
- B = FRX010-60F K = FRX090-60F
- C = FRX017-60F L = FRX110-60F
- D = FRX020-60F M = FRX135-60F
- E = FRX025-60F N = FRX160-60F
- F = FRX030-60F O = FRX185-60F
- G = FRX040-60F P = FRX250-60F
- H = FRX050-60F Q = FRX300-60F
- I = FRX065-60F R = FRX375-60F

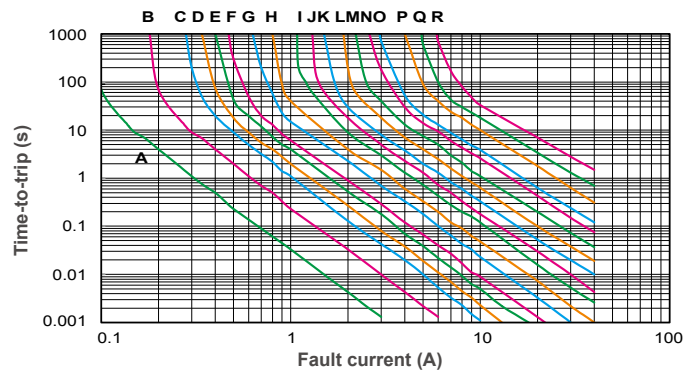


FRX Product Dimensions (mm)

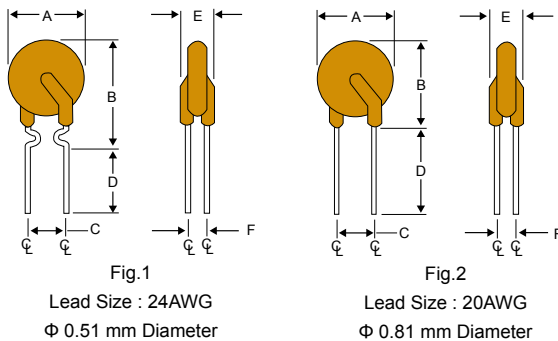


| Part Number | Fig. | A | B | C | D | E | F |
|-------------|------|------|------|------|------|------|------|
| | | Max. | Max. | Typ. | Min. | Max. | Typ. |
| FRX005-60F | 1 | 7.4 | 12.7 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX010-60F | 1 | 7.4 | 12.7 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX017-60F | 1 | 7.4 | 12.7 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX020-60F | 1 | 7.4 | 12.7 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX025-60F | 1 | 7.4 | 12.7 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX030-60F | 1 | 7.4 | 13.0 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX040-60F | 1 | 7.6 | 13.5 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX050-60F | 1 | 7.9 | 13.7 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX065-60F | 1 | 9.7 | 14.5 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX075-60F | 1 | 10.4 | 15.2 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX090-60F | 1 | 11.7 | 15.8 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX110-60F | 2 | 13.0 | 18.0 | 5.1 | 7.6 | 3.1 | 1.4 |
| FRX135-60F | 2 | 14.5 | 19.6 | 5.1 | 7.6 | 3.1 | 1.4 |
| FRX160-60F | 2 | 16.3 | 21.3 | 5.1 | 7.6 | 3.1 | 1.4 |
| FRX185-60F | 2 | 17.8 | 22.9 | 5.1 | 7.6 | 3.1 | 1.4 |
| FRX250-60F | 2 | 21.3 | 26.4 | 10.2 | 7.6 | 3.1 | 1.4 |
| FRX300-60F | 2 | 24.9 | 30.0 | 10.2 | 7.6 | 3.1 | 1.4 |
| FRX375-60F | 2 | 28.5 | 33.5 | 10.2 | 7.6 | 3.1 | 1.4 |

Part Numbering System

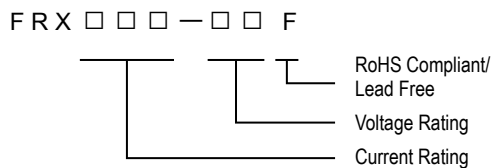

Part Marking System

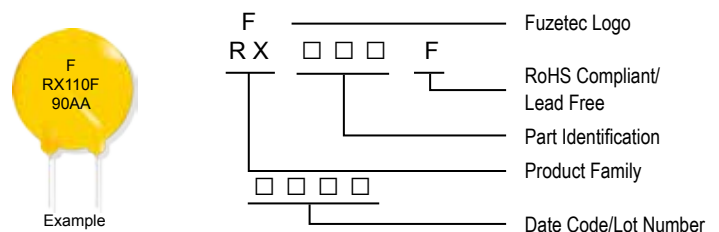

Package Information

| Part Number | Standard Package |
|-----------------------|-------------------------------|
| FRX005-60F~FRX050-60F | : 500 Pcs/Bag, 3.0K Reel/Tape |
| FRX065-60F~FRX090-60F | : 300 Pcs/Bag, 3.0K Reel/Tape |
| FRX110-60F | : 300 Pcs/Bag, 1.5K Reel/Tape |
| FRX135-60F~FRX185-60F | : 200 Pcs/Bag, 1.5K Reel/Tape |
| FRX250-60F~FRX375-60F | : 100 Pcs/Bag, 1.0K Reel/Tape |

Physical specifications

| | |
|---------------------------|-------------------------------------------------------------|
| Lead material | FRX005-60F~FRX040-60F Tin plated copper clad steel, 24 AWG. |
| | FRX050-60F~FRX090-60F Tin plated copper, 24 AWG. |
| | FRX110-60F~FRX375-60F Tin plated copper, 20 AWG. |
| Soldering characteristics | MIL-STD-202, Method 208E. |
| Insulating coating | Flame retardant epoxy, meets UL-94V-0 requirement. |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

NOTE : All Specifications subject to change without notice.

FRX90V Series



Application

Telecom & wide variety of electronic equipment

Product Features

Low hold current, Solid state, Radial leaded product ideal for up to 90V_{DC}



Operation Current

0.10A~3.75A

Maximum Voltage

Up to 90V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50004084) |



SVHC Compliant

Electrical Characteristics (23°C)


| Part Number | Hold Current I _H , A | Trip Current I _T , A | Max. Time to trip at 5xI _H , s | Max. Current I _{MAX} , A | Rated Voltage V _{MAX} , V _{DC} | Typ. Power Pd, W | Resistance | |
|-------------|------------------------------------|------------------------------------|----------------------------------------------|--------------------------------------|-----------------------------------------------------|---------------------|--------------------------|---------------------------|
| | | | | | | | R _{MIN} Ohms | R _{1MAX} Ohms |
| FRX010-90F | 0.10 | 0.20 | 4.0 | 40 | 72/90 | 0.38 | 2.50 | 7.50 |
| FRX015-90F | 0.15 | 0.35 | 10.0 | 40 | 72/90 | 0.70 | 2.40 | 7.00 |
| FRX017-90F | 0.17 | 0.34 | 3.0 | 40 | 72/90 | 0.48 | 2.00 | 8.00 |
| FRX020-90F | 0.20 | 0.40 | 2.2 | 40 | 72/90 | 0.41 | 1.83 | 4.40 |
| FRX025-90F | 0.25 | 0.50 | 2.5 | 40 | 72/90 | 0.45 | 1.25 | 3.00 |
| FRX030-90F | 0.30 | 0.60 | 3.0 | 40 | 72/90 | 0.49 | 0.88 | 2.10 |
| FRX035-90F | 0.35 | 0.75 | 10.0 | 40 | 72/90 | 1.30 | 0.70 | 2.50 |
| FRX040-90F | 0.40 | 0.80 | 3.8 | 40 | 72/90 | 0.56 | 0.55 | 1.29 |
| FRX050-90F | 0.50 | 1.00 | 4.0 | 40 | 72/90 | 0.77 | 0.50 | 1.17 |
| FRX055-90F | 0.55 | 1.20 | 10.0 | 40 | 72/90 | 1.50 | 0.40 | 1.50 |
| FRX065-90F | 0.65 | 1.30 | 5.3 | 40 | 72/90 | 0.88 | 0.31 | 0.72 |
| FRX075-90F | 0.75 | 1.50 | 6.3 | 40 | 72/90 | 0.92 | 0.25 | 0.60 |
| FRX090-90F | 0.90 | 1.80 | 7.2 | 40 | 72/90 | 0.99 | 0.20 | 0.47 |
| FRX110-90F | 1.10 | 2.20 | 8.2 | 40 | 72/90 | 1.50 | 0.15 | 0.38 |
| FRX135-90F | 1.35 | 2.70 | 9.6 | 40 | 72/90 | 1.70 | 0.12 | 0.30 |
| FRX160-90F | 1.60 | 3.20 | 11.4 | 40 | 72/90 | 1.90 | 0.09 | 0.22 |
| FRX185-90F | 1.85 | 3.70 | 12.6 | 40 | 72/90 | 2.10 | 0.08 | 0.19 |
| FRX250-90F | 2.50 | 5.00 | 15.6 | 40 | 72/90 | 2.50 | 0.05 | 0.13 |
| FRX300-90F | 3.00 | 6.00 | 19.8 | 40 | 72/90 | 2.80 | 0.04 | 0.10 |
| FRX375-90F | 3.75 | 7.50 | 24.0 | 40 | 72/90 | 3.20 | 0.03 | 0.08 |

Thermal Derating for PPTC Device at Various Ambient Temperatures


| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 158% | 138% | 119% | 100% | 90% | 81% | 70% | 60% | 50% | 36% |

Typical Time-To-Trip at 23°C

- A = FRX010-90F K = FRX065-90F
- B = FRX015-90F L = FRX075-90F
- C = FRX017-90F M = FRX090-90F
- D = FRX020-90F N = FRX110-90F
- E = FRX025-90F O = FRX135-90F
- F = FRX030-90F P = FRX160-90F
- G = FRX035-90F Q = FRX185-90F
- H = FRX040-90F R = FRX250-90F
- I = FRX050-90F S = FRX300-90F
- J = FRX055-90F T = FRX375-90F

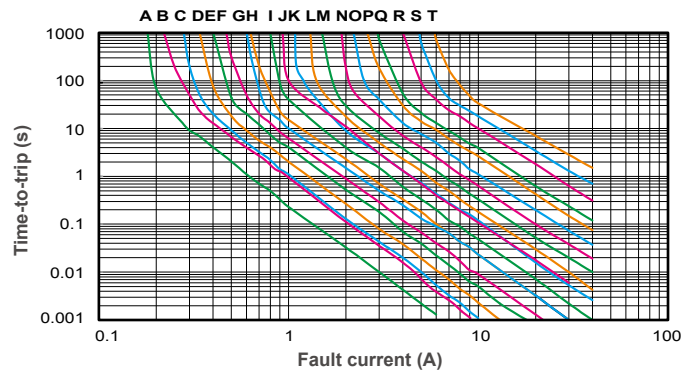


FRX90V Product Dimensions (mm)

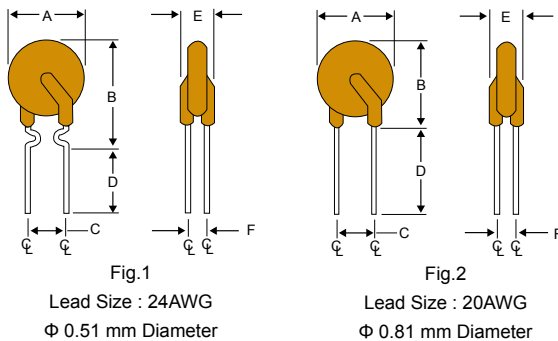


| Part Number | Fig. | A | B | C | D | E | F |
|-------------|------|------|------|------|------|------|------|
| | | Max. | Max. | Typ. | Min. | Max. | Typ. |
| FRX010-90F | 1 | 7.4 | 12.7 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX015-90F | 1 | 7.4 | 12.7 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX017-90F | 1 | 7.4 | 12.7 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX020-90F | 1 | 7.4 | 12.7 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX025-90F | 1 | 7.4 | 12.7 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX030-90F | 1 | 7.4 | 13.0 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX035-90F | 1 | 7.4 | 12.7 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX040-90F | 1 | 7.6 | 13.5 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX050-90F | 1 | 7.9 | 13.7 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX055-90F | 1 | 9.7 | 14.0 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX065-90F | 1 | 9.7 | 14.5 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX075-90F | 1 | 10.4 | 15.2 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX090-90F | 1 | 11.7 | 15.8 | 5.1 | 7.6 | 3.1 | 1.1 |
| FRX110-90F | 2 | 13.0 | 18.0 | 5.1 | 7.6 | 3.1 | 1.4 |
| FRX135-90F | 2 | 14.5 | 19.6 | 5.1 | 7.6 | 3.1 | 1.4 |
| FRX160-90F | 2 | 16.3 | 21.3 | 5.1 | 7.6 | 3.1 | 1.4 |
| FRX185-90F | 2 | 17.8 | 22.9 | 5.1 | 7.6 | 3.1 | 1.4 |
| FRX250-90F | 2 | 21.3 | 26.4 | 10.2 | 7.6 | 3.1 | 1.4 |
| FRX300-90F | 2 | 24.9 | 30.0 | 10.2 | 7.6 | 3.1 | 1.4 |
| FRX375-90F | 2 | 28.5 | 33.5 | 10.2 | 7.6 | 3.1 | 1.4 |

Part Numbering System

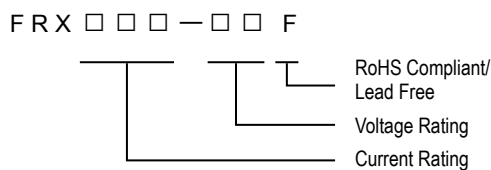

Part Marking System

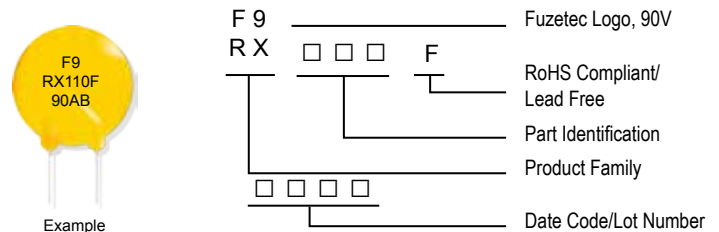

Package Information

| Part Number | Standard Package |
|-----------------------|------------------------------|
| FRX010-90F~FRX055-90F | : 500Pcs/Bag, 3.0K Reel/Tape |
| FRX065-90F~FRX090-90F | : 300Pcs/Bag, 3.0K Reel/Tape |
| FRX110-90F | : 300Pcs/Bag, 1.5K Reel/Tape |
| FRX135-90F~FRX185-90F | : 200Pcs/Bag, 1.5K Reel/Tape |
| FRX250-90F~FRX375-90F | : 100Pcs/Bag, 1.0K Reel/Tape |

Physical specifications

| | |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Lead material | FRX010-90F~FRX040-90F Tin plated copper clad steel, 24 AWG. FRX050-90F~FRX090-90F Tin plated copper, 24 AWG. FRX110-90F~FRX375-90F Tin plated copper, 20 AWG. |
| Soldering characteristics | MIL-STD-202, Method 208E. |
| Insulating coating | Flame retardant epoxy, meets UL-94V-0 requirement. |


Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

NOTE : All Specifications subject to change without notice.

FRU Series

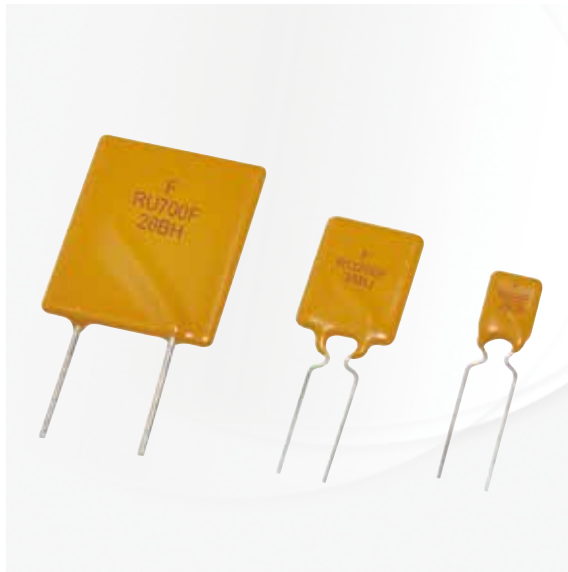

Application

Wide variety of electronic equipment

Product Features

Low resistance, High hold current, Solid state
Radial-leaded product ideal for up to 30V_{DC}



Operation Current

0.90A~9.00A

Maximum Voltage

30V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50004084) |



SVHC Compliant

Electrical Characteristics (23°C)


| Part Number | Hold Current I _H , A | Trip Current I _T , A | Max. Time to trip at 5xI _H , s | Max. Current I _{MAX} , A | Rated Voltage V _{MAX} , V _{DC} | Typ. Power Pd, W | Resistance | |
|-------------|------------------------------------|------------------------------------|----------------------------------------------|--------------------------------------|-----------------------------------------------------|---------------------|--------------------------|---------------------------|
| | | | | | | | R _{MIN} Ohms | R _{1MAX} Ohms |
| FRU090-30F | 0.90 | 1.80 | 5.9 | 100 | 30 | 0.6 | 0.070 | 0.220 |
| FRU110-30F | 1.10 | 2.20 | 6.6 | 100 | 30 | 0.7 | 0.050 | 0.170 |
| FRU135-30F | 1.35 | 2.70 | 7.3 | 100 | 30 | 0.8 | 0.040 | 0.130 |
| FRU160-30F | 1.60 | 3.20 | 8.0 | 100 | 30 | 0.9 | 0.030 | 0.110 |
| FRU185-30F | 1.85 | 3.70 | 8.7 | 100 | 30 | 1.0 | 0.030 | 0.090 |
| FRU250-30F | 2.50 | 5.00 | 10.3 | 100 | 30 | 1.2 | 0.020 | 0.070 |
| FRU300-30F | 3.00 | 6.00 | 10.8 | 100 | 30 | 2.0 | 0.020 | 0.080 |
| FRU400-30F | 4.00 | 8.00 | 12.7 | 100 | 30 | 2.5 | 0.010 | 0.050 |
| FRU500-30F | 5.00 | 10.00 | 14.5 | 100 | 30 | 3.0 | 0.010 | 0.050 |
| FRU600-30F | 6.00 | 12.00 | 16.0 | 100 | 30 | 3.5 | 0.005 | 0.040 |
| FRU700-30F | 7.00 | 14.00 | 17.5 | 100 | 30 | 3.8 | 0.005 | 0.030 |
| FRU800-30F | 8.00 | 16.00 | 18.8 | 100 | 30 | 4.0 | 0.005 | 0.020 |
| FRU900-30F | 9.00 | 18.00 | 20.0 | 100 | 30 | 4.2 | 0.005 | 0.020 |

Thermal Derating for PPTC Device at Various Ambient Temperatures


| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 145% | 130% | 115% | 100% | 92% | 84% | 76% | 70% | 61% | 50% |

Typical Time-To-Trip at 23°C

- A = FRU090-30F H = FRU400-30F
- B = FRU110-30F I = FRU500-30F
- C = FRU135-30F J = FRU600-30F
- D = FRU160-30F K = FRU700-30F
- E = FRU185-30F L = FRU800-30F
- F = FRU250-30F M = FRU900-30F
- G = FRU300-30F

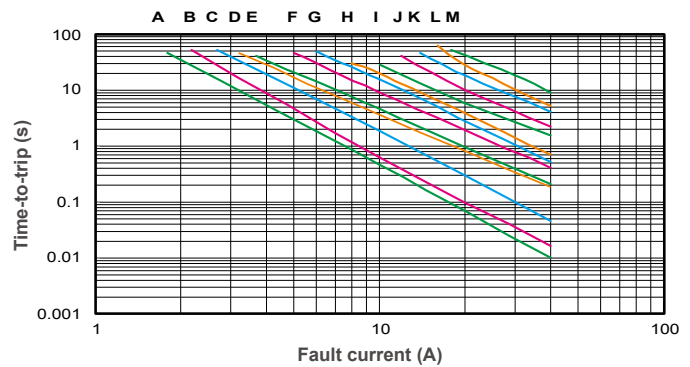


FRU Product Dimensions (mm)

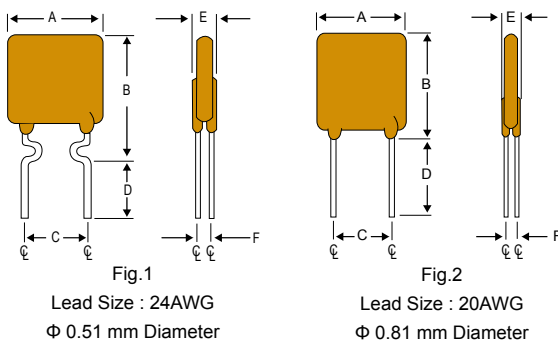


| Part Number | Fig. | A | B | C | D | E | F |
|-------------|------|------|------|------|------|------|------|
| | | Max. | Max. | Typ. | Min. | Max. | Typ. |
| FRU090-30F | 1 | 7.4 | 12.2 | 5.1 | 7.6 | 3.0 | 0.9 |
| FRU110-30F | 1 | 7.4 | 14.2 | 5.1 | 7.6 | 3.0 | 0.9 |
| FRU135-30F | 1 | 8.9 | 13.5 | 5.1 | 7.6 | 3.0 | 0.9 |
| FRU160-30F | 1 | 8.9 | 15.2 | 5.1 | 7.6 | 3.0 | 0.9 |
| FRU185-30F | 1 | 10.2 | 15.7 | 5.1 | 7.6 | 3.0 | 0.9 |
| FRU250-30F | 1 | 11.4 | 18.3 | 5.1 | 7.6 | 3.0 | 0.9 |
| FRU300-30F | 2 | 11.4 | 17.3 | 5.1 | 7.6 | 3.0 | 1.2 |
| FRU400-30F | 2 | 14.0 | 20.1 | 5.1 | 7.6 | 3.0 | 1.2 |
| FRU500-30F | 2 | 14.0 | 24.9 | 10.2 | 7.6 | 3.0 | 1.2 |
| FRU600-30F | 2 | 16.5 | 24.9 | 10.2 | 7.6 | 3.0 | 1.2 |
| FRU700-30F | 2 | 19.1 | 26.7 | 10.2 | 7.6 | 3.0 | 1.2 |
| FRU800-30F | 2 | 21.6 | 29.2 | 10.2 | 7.6 | 3.0 | 1.2 |
| FRU900-30F | 2 | 24.1 | 29.7 | 10.2 | 7.6 | 3.0 | 1.2 |

Part Numbering System

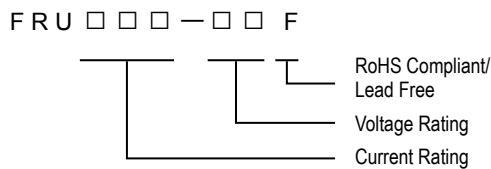

Part Marking System

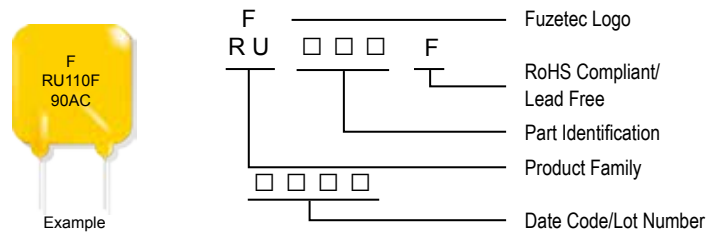

Package Information

| Part Number | Standard Package |
|-----------------------|-----------------------------|
| FRU090-30F~FRU110-30F | 500 Pcs/Bag, 3.0K Reel/Tape |
| FRU135-30F~FRU250-30F | 300 Pcs/Bag, 3.0K Reel/Tape |
| FRU300-30F~FRU400-30F | 200 Pcs/Bag, 1.5K Reel/Tape |
| FRU500-30F | 200 Pcs/Bag, 1.0K Reel/Tape |
| FRU600-30F~FRU900-30F | 100 Pcs/Bag |

Physical specifications


| | |
|---------------------------|-------------------------------------------------------------|
| Lead material | FRU090-30F~FRU250-30F Tin plated copper clad steel, 24 AWG. |
| | FRU300-30F~FRU900-30F Tin plated copper, 20 AWG. |
| Soldering characteristics | MIL-STD-202, Method 208E. |
| Insulating coating | Flame retardant epoxy, meets UL-94V-0 requirement. |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

FRT Series

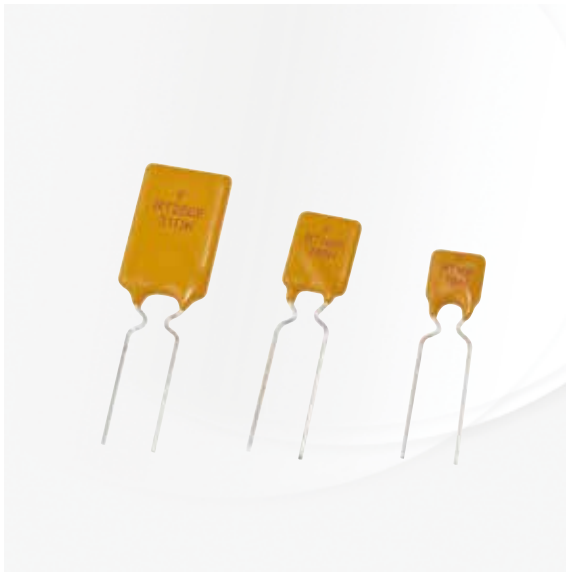

Application

IEEE 1394 Firewire, Computers & Consumer electronics

Product Features

Fast trip time, Lower Trip-to-hold Ratio, Radial-leaded product ideal for up to 36V_{DC}



Operation Current

0.50A~2.50A

Maximum Voltage

36V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50004084) |



Electrical Characteristics (23°C)


| Part Number | Hold Current I _H , A | Trip Current I _T , A | Max. Time to trip at 5xI _H , S | Max. Current I _{MAX} , A | Rated Voltage V _{MAX} , V _{DC} | Typ. Power Pd, W | Resistance | |
|-------------|------------------------------------|------------------------------------|----------------------------------------------|--------------------------------------|-----------------------------------------------------|---------------------|--------------------------|---------------------------|
| | | | | | | | R _{MIN} Ohms | R _{1MAX} Ohms |
| FRT050-33F | 0.50 | 1.00 | 5.0 | 40 | 36 | 0.67 | 0.140 | 0.448 |
| FRT075-33F | 0.75 | 1.50 | 4.0 | 40 | 36 | 0.71 | 0.115 | 0.368 |
| FRT090-33F | 0.90 | 1.80 | 3.5 | 40 | 36 | 0.74 | 0.090 | 0.288 |
| FRT120-33F | 1.20 | 2.30 | 3.5 | 40 | 36 | 0.78 | 0.074 | 0.180 |
| FRT135-33F | 1.35 | 2.50 | 4.5 | 40 | 36 | 0.84 | 0.059 | 0.143 |
| FRT160-33F | 1.60 | 2.75 | 4.5 | 40 | 36 | 0.86 | 0.041 | 0.131 |
| FRT190-33F | 1.90 | 3.00 | 3.5 | 40 | 36 | 0.90 | 0.045 | 0.092 |
| FRT220-33F | 2.20 | 3.50 | 6.5 | 40 | 36 | 0.95 | 0.025 | 0.080 |
| FRT250-33F | 2.50 | 4.00 | 8.0 | 40 | 36 | 0.99 | 0.020 | 0.064 |

Thermal Derating for PPTC Device at Various Ambient Temperatures


| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 148% | 134% | 120% | 100% | 98% | 90% | 84% | 78% | 70% | 59% |

Typical Time-To-Trip at 23°C

- A = FRT050-33F
- B = FRT075-33F
- C = FRT090-33F
- D = FRT120-33F
- E = FRT135-33F
- F = FRT160-33F
- G = FRT190-33F
- H = FRT220-33F
- I = FRT250-33F

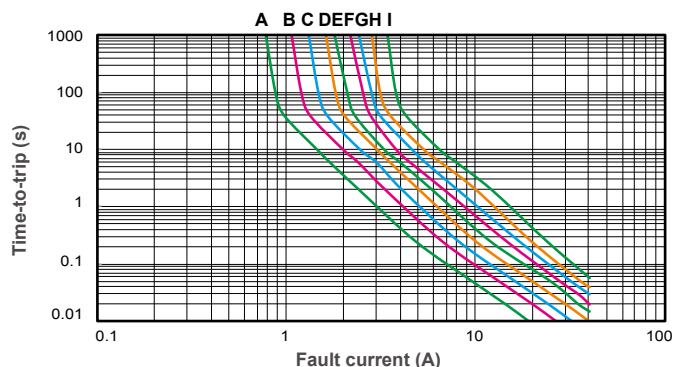


FRT Product Dimensions (mm)




| Part Number | A | B | C | D | E | F |
|-------------|------|------|------|------|------|------|
| | Max. | Max. | Typ. | Min. | Max. | Typ. |
| FRT050-33F | 7.4 | 12.2 | 5.1 | 7.6 | 3.0 | 1.1 |
| FRT075-33F | 7.4 | 12.2 | 5.1 | 7.6 | 3.0 | 1.1 |
| FRT090-33F | 7.4 | 12.2 | 5.1 | 7.6 | 3.0 | 1.1 |
| FRT120-33F | 7.4 | 12.2 | 5.1 | 7.6 | 3.0 | 1.1 |
| FRT135-33F | 7.4 | 14.2 | 5.1 | 7.6 | 3.0 | 1.1 |
| FRT160-33F | 7.4 | 14.0 | 5.1 | 7.6 | 3.0 | 1.1 |
| FRT190-33F | 9.0 | 13.5 | 5.1 | 7.6 | 3.0 | 1.1 |
| FRT220-33F | 10.0 | 17.0 | 5.1 | 7.6 | 3.0 | 1.1 |
| FRT250-33F | 10.0 | 19.5 | 5.1 | 7.6 | 3.0 | 1.1 |

Part Numbering System

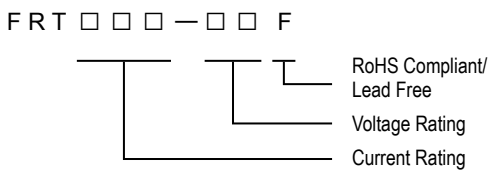

Part Marking System

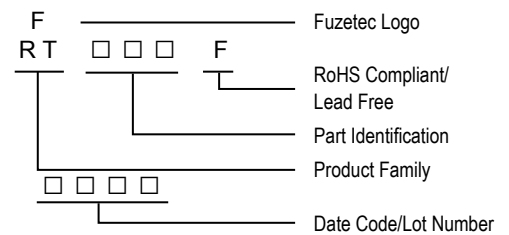

Package Information

| Part Number | Standard Package |
|-----------------------|------------------------------|
| FRT050-33F~FRT250-33F | : 500Pcs/Bag, 3.0K Reel/Tape |

Physical specifications

| | |
|---------------------------|----------------------------------------------------|
| Lead material | Tin plated copper clad steel, 24 AWG. |
| Soldering characteristics | MIL-STD-202, Method 208E. |
| Insulating coating | Flame retardant epoxy, meets UL-94V-0 requirement. |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

FUSB Series



Application

Low voltage USB equipment

Product Features

Low resistance, Fast trip time, Lower Trip-to-hold Ratio



Operation Current

0.75A ~2.50A

Maximum Voltage

16V/30V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50004084) |



SVHC Compliant

Electrical Characteristics (23°C)


| Part Number | Hold Current | Trip Current | Max. Time to trip | | Max. Current | Rated Voltage | Typ. Power | Resistance | |
|-------------|--------------|--------------|--------------------|--------------------|--------------|---------------|------------|------------------|-------------------|
| | | | Current | Time | | | | R _{MIN} | R _{1MAX} |
| | | | I _H , A | I _T , A | | | | A | Sec |
| FUSB075F | 0.75 | 1.30 | 8.0 | 0.4 | 40 | 16 | 0.3 | 0.08 | 0.23 |
| FUSB090F | 0.90 | 1.80 | 8.0 | 1.2 | 40 | 16/30 | 0.6 | 0.07 | 0.18 |
| FUSB110F | 1.10 | 2.20 | 8.0 | 2.3 | 40 | 16/30 | 0.7 | 0.05 | 0.14 |
| FUSB120F | 1.20 | 2.00 | 8.0 | 0.7 | 40 | 16 | 0.6 | 0.04 | 0.14 |
| FUSB135F | 1.35 | 2.70 | 8.0 | 4.5 | 40 | 16/30 | 0.8 | 0.04 | 0.12 |
| FUSB155F | 1.55 | 2.70 | 7.8 | 2.2 | 40 | 16 | 0.7 | 0.03 | 0.12 |
| FUSB160F | 1.60 | 3.20 | 8.0 | 9.0 | 40 | 16/30 | 0.9 | 0.03 | 0.11 |
| FUSB185F | 1.85 | 3.70 | 8.0 | 10.0 | 40 | 16/30 | 1.0 | 0.03 | 0.09 |
| FUSB250F | 2.50 | 5.00 | 8.0 | 40.0 | 40 | 16/30 | 1.2 | 0.02 | 0.07 |

Thermal Derating for PPTC Device at Various Ambient Temperatures

| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 145% | 130% | 115% | 100% | 91% | 83% | 78% | 70% | 61% | 50% |


Typical Time-To-Trip at 23°C

- A = FUSB075F
- B = FUSB120F
- C = FUSB155F

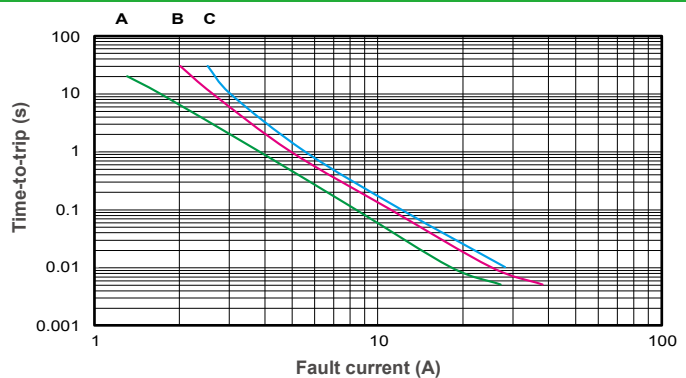


Typical Time-To-Trip at 23°C

- D = FUSB090F
- E = FUSB110F
- F = FUSB135F
- G = FUSB160F
- H = FUSB185F
- I = FUSB250F

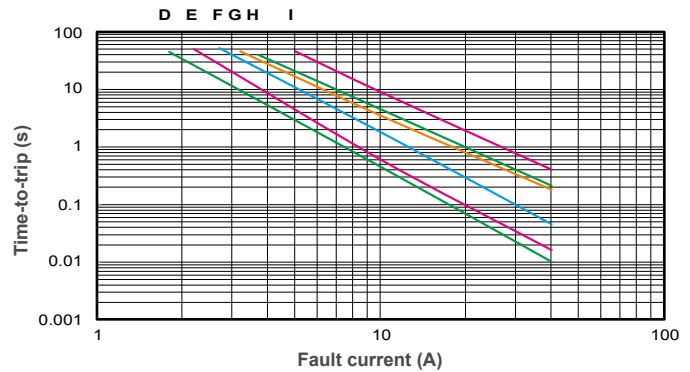


FUSB Product Dimensions (mm)

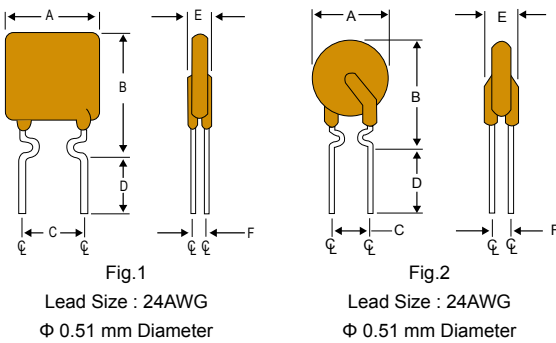


| Part Number | Fig. | A | B | C | D | E | F |
|-------------|------|------|------|------|------|------|------|
| | | Max. | Max. | Typ. | Min. | Max. | Typ. |
| FUSB075F | 2 | 6.9 | 11.4 | 5.1 | 7.6 | 3.0 | 0.8 |
| FUSB090F | 1 | 7.4 | 12.2 | 5.1 | 7.6 | 3.0 | 0.8 |
| FUSB110F | 1 | 7.4 | 14.2 | 5.1 | 7.6 | 3.0 | 0.8 |
| FUSB120F | 2 | 6.9 | 11.7 | 5.1 | 7.6 | 3.0 | 0.8 |
| FUSB135F | 1 | 8.9 | 13.5 | 5.1 | 7.6 | 3.0 | 0.8 |
| FUSB155F | 2 | 6.9 | 11.7 | 5.1 | 7.6 | 3.0 | 0.8 |
| FUSB160F | 1 | 8.9 | 15.2 | 5.1 | 7.6 | 3.0 | 0.8 |
| FUSB185F | 1 | 10.2 | 15.7 | 5.1 | 7.6 | 3.0 | 0.8 |
| FUSB250F | 1 | 11.4 | 18.3 | 5.1 | 7.6 | 3.0 | 0.8 |

Part Numbering System

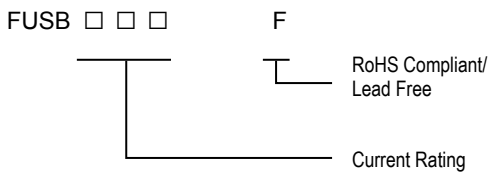

Part Marking System

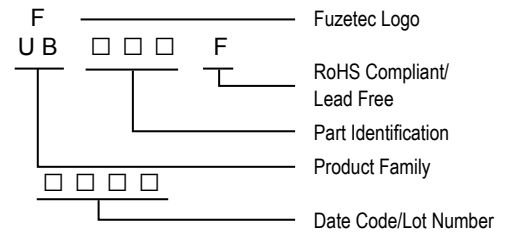

Package Information

| Part Number | Standard Package |
|-------------------|----------------------------|
| FUSB075F~FUSB250F | 500Pcs/Bag, 3.0K Reel/Tape |

Physical specifications

| | |
|---------------------------|------------------------------------------------------------|
| Lead material | Tin plated copper clad steel, 24 AWG. |
| Soldering characteristics | MIL-STD-202, Method 208E. |
| Insulating coating | Flame retardant epoxy polymer, meets UL-94V-0 requirement. |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

FRG Series



Application

Wide variety of electronic equipment

Product Features

Very high hold current, Solid state Radial-leaded product ideal for up to 16V_{DC}



Operation Current

2.50 A~14.00A

Maximum Voltage

16V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50004084) |



SVHC Compliant

Electrical Characteristics (23°C)


| Part Number | Hold Current | Trip Current | Max. Time to trip | Max. Current | Rated Voltage | Typ. Power | Resistance | |
|-------------|--------------------|--------------------|-------------------------|----------------------|------------------------------------|--------------------|------------------|-------------------|
| | | | | | | | R _{MIN} | R _{1MAX} |
| | I _H , A | I _T , A | at 5xI _H , s | I _{MAX} , A | V _{MAX} , V _{DC} | P _d , W | Ohms | Ohms |
| FRG250-16F | 2.5 | 4.7 | 5.0 | 100 | 16 | 1.0 | 0.022 | 0.053 |
| FRG300-16F | 3.0 | 5.1 | 2.0 | 100 | 16 | 2.3 | 0.034 | 0.105 |
| FRG400-16F | 4.0 | 6.8 | 3.5 | 100 | 16 | 2.4 | 0.020 | 0.063 |
| FRG500-16F | 5.0 | 8.5 | 3.6 | 100 | 16 | 2.6 | 0.014 | 0.044 |
| FRG600-16F | 6.0 | 10.2 | 5.8 | 100 | 16 | 2.8 | 0.009 | 0.033 |
| FRG700-16F | 7.0 | 11.9 | 8.0 | 100 | 16 | 3.0 | 0.006 | 0.021 |
| FRG800-16F | 8.0 | 13.6 | 9.0 | 100 | 16 | 3.0 | 0.005 | 0.018 |
| FRG900-16F | 9.0 | 15.3 | 12.0 | 100 | 16 | 3.3 | 0.004 | 0.015 |
| FRG1000-16F | 10.0 | 17.0 | 12.5 | 100 | 16 | 3.3 | 0.003 | 0.012 |
| FRG1100-16F | 11.0 | 18.7 | 13.5 | 100 | 16 | 3.7 | 0.003 | 0.010 |
| FRG1200-16F | 12.0 | 20.4 | 16.0 | 100 | 16 | 4.2 | 0.002 | 0.009 |
| FRG1400-16F | 14.0 | 23.8 | 20.0 | 100 | 16 | 4.6 | 0.002 | 0.008 |

Thermal Derating for PPTC Device at Various Ambient Temperatures


| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 148% | 132% | 116% | 100% | 91% | 84% | 76% | 69% | 60% | 48% |

Typical Time-To-Trip at 23°C

- A = FRG250-16F
- B = FRG300-16F
- C = FRG400-16F
- D = FRG500-16F
- E = FRG600-16F
- F = FRG700-16F
- G = FRG800-16F
- H = FRG900-16F
- I = FRG1000-16F
- J = FRG1100-16F
- K = FRG1200-16F
- L = FRG1400-16F

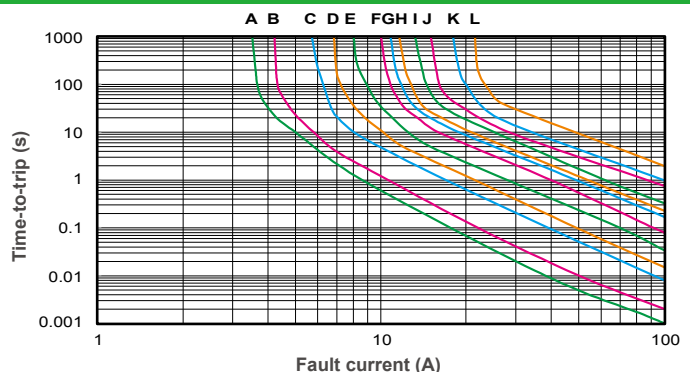


FRG Product Dimensions (mm)

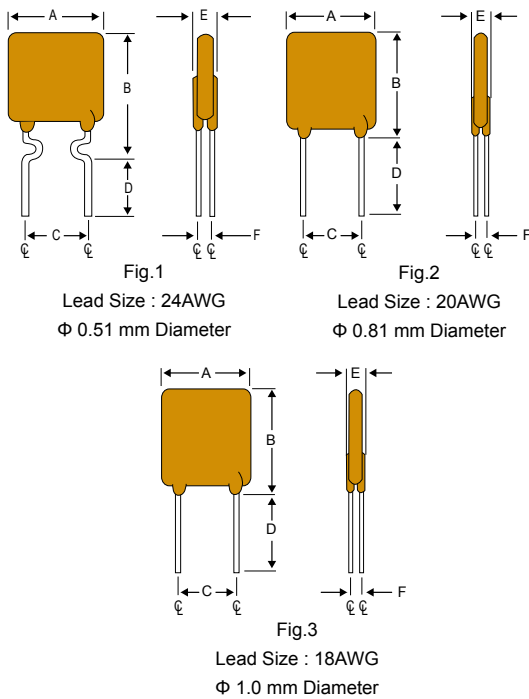


| Part Number | Fig. | A | B | C | D | E | F |
|-------------|------|------|------|------|------|------|------|
| | | Max. | Max. | Typ. | Min. | Max. | Typ. |
| FRG250-16F | 1 | 8.9 | 12.8 | 5.1 | 7.6 | 3.0 | 1.2 |
| FRG300-16F | 2 | 7.1 | 11.0 | 5.1 | 7.6 | 3.0 | 1.2 |
| FRG400-16F | 2 | 8.9 | 12.8 | 5.1 | 7.6 | 3.0 | 1.2 |
| FRG500-16F | 2 | 10.4 | 14.3 | 5.1 | 7.6 | 3.0 | 1.2 |
| FRG600-16F | 2 | 10.7 | 17.1 | 5.1 | 7.6 | 3.0 | 1.2 |
| FRG700-16F | 2 | 11.2 | 19.7 | 5.1 | 7.6 | 3.0 | 1.2 |
| FRG800-16F | 2 | 12.7 | 20.9 | 5.1 | 7.6 | 3.0 | 1.2 |
| FRG900-16F | 2 | 14.0 | 21.7 | 5.1 | 7.6 | 3.0 | 1.2 |
| FRG1000-16F | 2 | 16.5 | 24.1 | 5.1 | 7.6 | 3.0 | 1.2 |
| FRG1100-16F | 2 | 17.5 | 26.0 | 5.1 | 7.6 | 3.0 | 1.2 |
| FRG1200-16F | 3 | 17.5 | 28.0 | 10.2 | 7.6 | 3.6 | 1.4 |
| FRG1400-16F | 3 | 27.9 | 27.9 | 10.2 | 7.6 | 3.6 | 1.4 |

Part Numbering System

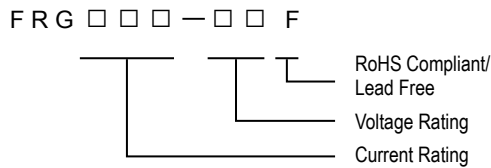

Part Marking System

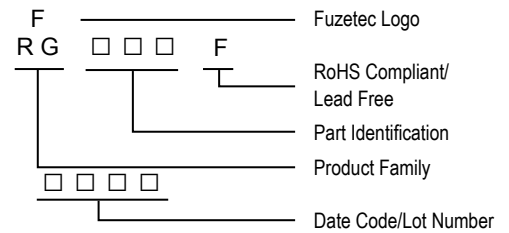

Package Information

| Part Number | Standard Package |
|-------------------------|-------------------------------|
| FRG250-16F~FRG300-16F | : 500 Pcs/Bag, 2.5K Reel/Tape |
| FRG400-16F~FRG600-16F | : 300 Pcs/Bag, 2.5K Reel/Tape |
| FRG700-16F | : 200 Pcs/Bag, 1.5K Reel/Tape |
| FRG800-16F~FRG900-16F | : 200 Pcs/Bag |
| FRG1000-16F~FRG1400-16F | : 100 Pcs/Bag |

Physical specifications


| | |
|---------------------------|----------------------------------------------------|
| Lead material | FRG250-16F Tin plated copper clad steel, 24 AWG. |
| | FRG300-16F~FRG1100-16F Tin plated copper, 20 AWG. |
| | FRG1200-16F~FRG1400-16F Tin plated copper, 18 AWG. |
| Soldering characteristics | MIL-STD-202, Method 208E. |
| Insulating coating | Flame retardant epoxy, meets UL-94V-0 requirement. |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

FHT Series

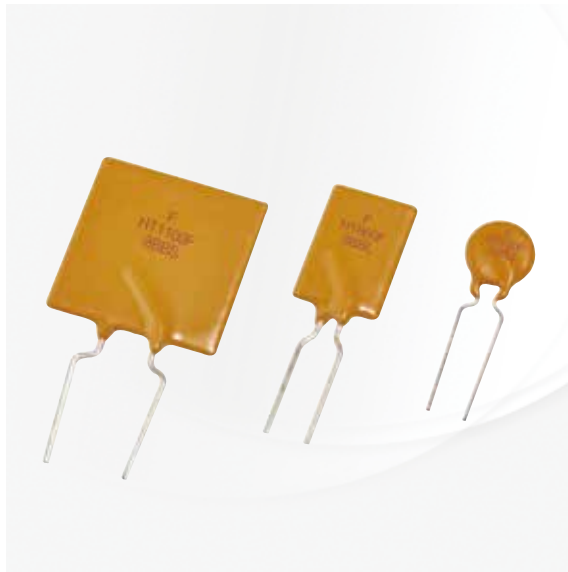

Application

Wide variety of electronic equipment

Product Features

Very Low resistance, Very High hold current, Solid state, Radial leaded product ideal for up to 16V/30V_{DC} and operating temperatures up to 125°C.



Operation Current

0.50A~15.00A

Maximum Voltage

16V/30V_{DC}



Temperature Range

-40°C to 125°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50004084) |



Electrical Characteristics (23°C)


| Part Number | Hold Current | Trip Current | Max. Time to trip | Max. Current | Rated Voltage | Typ. Power | Resistance | |
|-------------|--------------------|--------------------|-------------------------|----------------------|------------------------------------|--------------------|------------------|-------------------|
| | | | | | | | R _{MIN} | R _{1MAX} |
| | I _H , A | I _T , A | at 5xI _H , s | I _{MAX} , A | V _{MAX} , V _{DC} | P _d , W | Ohms | Ohms |
| FHT050-30F | 0.5 | 0.9 | 2.5 | 40 | 30 | 0.9 | 0.4800 | 1.1000 |
| FHT070-30F | 0.7 | 1.4 | 3.2 | 40 | 30 | 1.4 | 0.3000 | 0.8000 |
| FHT100-30F | 1.0 | 1.8 | 5.2 | 40 | 30 | 1.4 | 0.1800 | 0.4300 |
| FHT200-16F | 2.0 | 3.8 | 3.0 | 100 | 16 | 1.4 | 0.0450 | 0.1100 |
| FHT300-16F | 3.0 | 6.0 | 5.0 | 100 | 16 | 3.0 | 0.0330 | 0.0790 |
| FHT400-16F | 4.0 | 7.0 | 5.0 | 100 | 16 | 3.3 | 0.0240 | 0.0600 |
| FHT450-16F | 4.5 | 7.8 | 3.0 | 100 | 16 | 3.6 | 0.0220 | 0.0540 |
| FHT550-16F | 5.5 | 10.0 | 6.0 | 100 | 16 | 3.5 | 0.0150 | 0.0370 |
| FHT600-16F | 6.0 | 10.8 | 5.0 | 100 | 16 | 4.1 | 0.0130 | 0.0320 |
| FHT650-16F | 6.5 | 12.0 | 5.5 | 100 | 16 | 4.3 | 0.0110 | 0.0260 |
| FHT700-16F | 7.0 | 13.0 | 7.0 | 100 | 16 | 4.0 | 0.0100 | 0.0250 |
| FHT750-16F | 7.5 | 13.1 | 7.0 | 100 | 16 | 4.5 | 0.0094 | 0.0220 |
| FHT800-16F | 8.0 | 15.0 | 8.0 | 100 | 16 | 4.2 | 0.0080 | 0.0200 |
| FHT900-16F | 9.0 | 16.5 | 10.0 | 100 | 16 | 5.0 | 0.0074 | 0.0170 |
| FHT1000-16F | 10.0 | 18.5 | 9.0 | 100 | 16 | 5.3 | 0.0062 | 0.0150 |
| FHT1100-16F | 11.0 | 20.0 | 11.0 | 100 | 16 | 5.5 | 0.0055 | 0.0130 |
| FHT1300-16F | 13.0 | 24.0 | 13.0 | 100 | 16 | 6.9 | 0.0041 | 0.0100 |
| FHT1400-16F | 14.0 | 27.0 | 13.0 | 100 | 16 | 6.9 | 0.0030 | 0.0090 |
| FHT1500-16F | 15.0 | 28.0 | 20.0 | 100 | 16 | 7.0 | 0.0032 | 0.0092 |

Thermal Derating for PPTC Device at Various Ambient Temperatures


| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C | 125°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|-------|
| DERATING % | 143% | 129% | 116% | 100% | 93% | 87% | 80% | 72% | 65% | 55% | 26% |

Typical Time-To-Trip at 23°C

- A = FHT050-30F K = FHT700-16F
- B = FHT070-30F L = FHT750-16F
- C = FHT100-30F M = FHT800-16F
- D = FHT200-16F N = FHT900-16F
- E = FHT300-16F O = FHT1000-16F
- F = FHT400-16F P = FHT1100-16F
- G = FHT450-16F Q = FHT1300-16F
- H = FHT550-16F R = FHT1400-16F
- I = FHT600-16F S = FHT1500-16F
- J = FHT650-16F

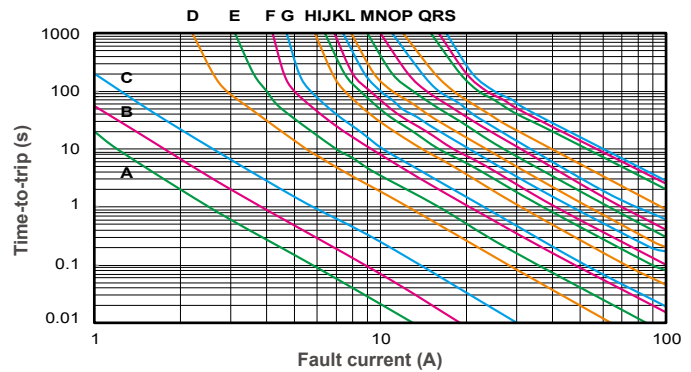


FHT Product Dimensions (mm)

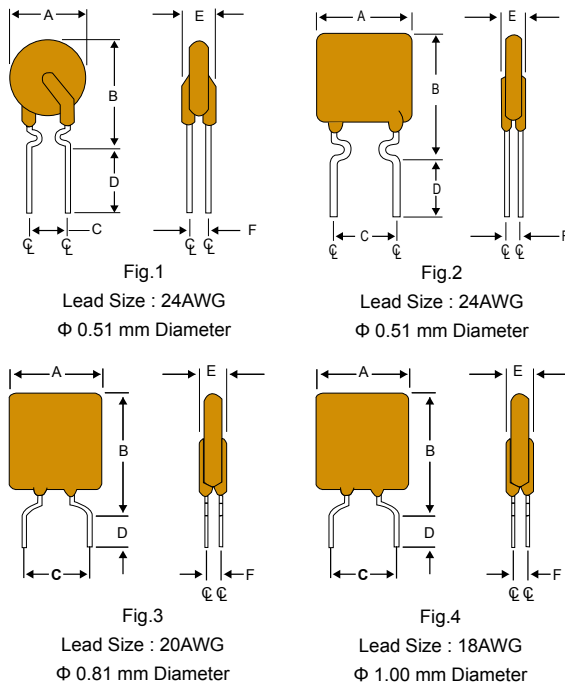


| Part Number | Fig. | A | B | C | D | E | F |
|-------------|------|------|------|------|------|------|------|
| | | Max. | Max. | Typ. | Min. | Max. | Typ. |
| FHT050-30F | 1 | 7.4 | 12.7 | 5.1 | 7.6 | 3.0 | 1.2 |
| FHT070-30F | 2 | 6.9 | 10.8 | 5.1 | 7.6 | 3.0 | 1.2 |
| FHT100-30F | 1 | 9.7 | 13.6 | 5.1 | 7.6 | 3.0 | 1.2 |
| FHT200-16F | 1 | 9.4 | 14.4 | 5.1 | 7.6 | 3.0 | 1.2 |
| FHT300-16F | 3 | 8.8 | 13.8 | 5.1 | 7.6 | 3.0 | 1.2 |
| FHT400-16F | 3 | 10.0 | 15.0 | 5.1 | 7.6 | 3.0 | 1.2 |
| FHT450-16F | 3 | 10.4 | 15.6 | 5.1 | 7.6 | 3.0 | 1.2 |
| FHT550-16F | 3 | 11.2 | 18.9 | 5.1 | 7.6 | 3.0 | 1.2 |
| FHT600-16F | 3 | 11.2 | 21.0 | 5.1 | 7.6 | 3.0 | 1.2 |
| FHT650-16F | 3 | 12.7 | 22.2 | 5.1 | 7.6 | 3.0 | 1.2 |
| FHT700-16F | 3 | 14.0 | 21.9 | 5.1 | 7.6 | 3.0 | 1.2 |
| FHT750-16F | 3 | 14.0 | 23.5 | 5.1 | 7.6 | 3.0 | 1.2 |
| FHT800-16F | 3 | 16.5 | 22.5 | 5.1 | 7.6 | 3.0 | 1.2 |
| FHT900-16F | 3 | 16.5 | 25.7 | 5.1 | 7.6 | 3.0 | 1.2 |
| FHT1000-16F | 3 | 17.5 | 26.5 | 10.2 | 7.6 | 3.0 | 1.2 |
| FHT1100-16F | 3 | 21.0 | 26.1 | 10.2 | 7.6 | 3.0 | 1.2 |
| FHT1300-16F | 4 | 23.5 | 28.7 | 10.2 | 7.6 | 3.6 | 1.4 |
| FHT1400-16F | 4 | 23.5 | 28.7 | 10.2 | 7.6 | 3.6 | 1.4 |
| FHT1500-16F | 4 | 23.5 | 28.7 | 10.2 | 7.6 | 3.6 | 1.4 |

Part Numbering System

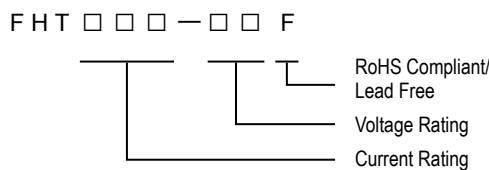

Part Marking System

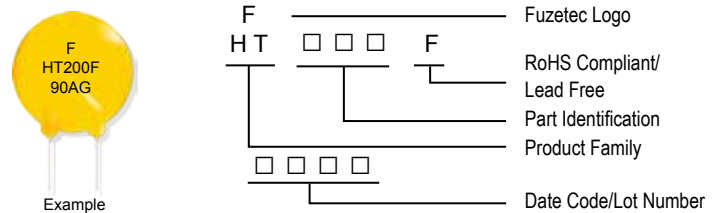

Package Information

| Part Number | Standard Package |
|------------------------|-----------------------------|
| FHT050-30F~FHT300-16F | 500 Pcs/Bag, 2.5K Reel/Tape |
| FHT400-16F | 300 Pcs/Bag, 2.5K Reel/Tape |
| FHT450-16F~FHT550-16F | 300 Pcs/Bag, 1.5K Reel/Tape |
| FHT600-16F | 200 Pcs/Bag, 1.5K Reel/Tape |
| FHT650-16F~FHT700-16F | 200 Pcs/Bag |
| FHT750-16F~FHT1500-16F | 100 Pcs/Bag |

Physical specifications

| | |
|---------------------------|----------------------------------------------------------------------------|
| Lead material | FHT050-30F~FHT100-30F and FHT200-16F Tin plated copper clad steel, 24 AWG. |
| | FHT300-16F~FHT1100-16F Tin plated copper, 20 AWG. |
| | FHT1300-16F~FHT1500-16F Tin plated copper, 18 AWG. |
| Soldering characteristics | MIL-STD-202, Method 208E. |
| Insulating coating | Flame retardant epoxy, meets UL-94V-0 requirement. |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

NOTE : All Specifications subject to change without notice.

FHE Series



Application

Wide variety of electronic equipment

Product Features

Very Low resistance, Very High hold current, Solid state, Radial leaded product ideal for up to 32V and Operating temperatures up to 125°C.



Operation Current

0.50A~10.00A

Maximum Voltage

32V



Temperature Range

-40°C to 125°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50004084) |



Electrical Characteristics (23°C)


| Part Number | Hold Current I_H, A | Trip Current I_T, A | Max. Time to trip at $5xI_H, s$ | Max. Current I_{MAX}, A | Rated Voltage V_{MAX}, V_{DC} | Typ. Power P_d, W | Resistance | |
|-------------|--------------------------|--------------------------|------------------------------------|------------------------------|------------------------------------|------------------------|-------------------|--------------------|
| | | | | | | | R_{MIN} Ohms | $R1_{MAX}$ Ohms |
| FHE050-32F | 0.5 | 1.0 | 3.0 | 100 | 32 | 0.9 | 0.3500 | 1.1000 |
| FHE070-32F | 0.7 | 1.4 | 3.2 | 100 | 32 | 1.4 | 0.2300 | 0.8000 |
| FHE100-32F | 1.0 | 1.9 | 6.2 | 100 | 32 | 1.4 | 0.1500 | 0.4300 |
| FHE200-32F | 2.0 | 4.0 | 5.5 | 100 | 32 | 2.2 | 0.0650 | 0.2500 |
| FHE300-32F | 3.0 | 6.0 | 5.0 | 100 | 32 | 3.2 | 0.0350 | 0.1100 |
| FHE500-32F | 5.0 | 10.0 | 9.0 | 100 | 32 | 5.3 | 0.0150 | 0.0400 |
| FHE750-32F | 7.5 | 15.0 | 13.0 | 100 | 32 | 6.5 | 0.0074 | 0.0230 |
| FHE1000-32F | 10.0 | 20.0 | 15.0 | 100 | 32 | 7.0 | 0.0060 | 0.0160 |

Thermal Derating for PPTC Device at Various Ambient Temperatures


| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C | 125°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|-------|
| DERATING % | 143% | 130% | 115% | 100% | 92% | 88% | 80% | 72% | 65% | 55% | 28% |

Typical Time-To-Trip at 23°C

- A = FHE050-32F
- B = FHE070-32F
- C = FHE100-32F
- D = FHE200-32F
- E = FHE300-32F
- F = FHE500-32F
- G = FHE750-32F
- H = FHE1000-32F

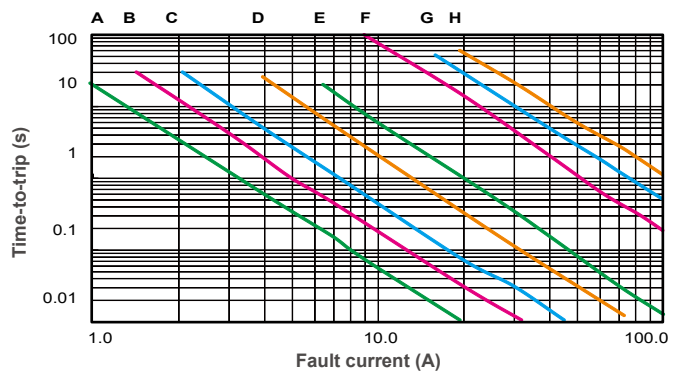


FHE Product Dimensions (mm)

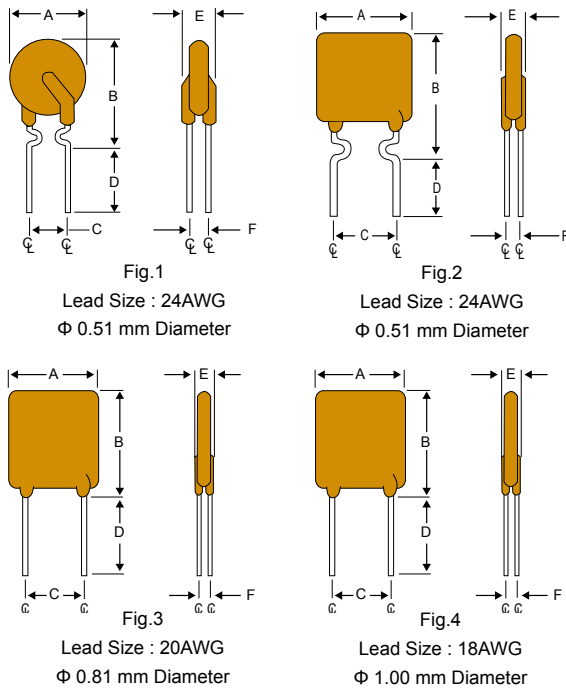


| Part Number | Fig. | A | B | C | D | E |
|-------------|------|------|------|------|------|------|
| | | Max. | Max. | Typ. | Min. | Max. |
| FHE050-32F | 1 | 7.4 | 12.7 | 5.1 | 7.6 | 3.3 |
| FHE070-32F | 2 | 6.9 | 10.8 | 5.1 | 7.6 | 3.0 |
| FHE100-32F | 1 | 9.7 | 13.6 | 5.1 | 7.6 | 3.0 |
| FHE200-32F | 3 | 9.5 | 13.5 | 5.1 | 7.6 | 3.0 |
| FHE300-32F | 3 | 10.2 | 15.5 | 5.1 | 7.6 | 3.8 |
| FHE500-32F | 3 | 14.0 | 24.1 | 5.1 | 7.6 | 3.8 |
| FHE750-32F | 3 | 21.1 | 24.9 | 10.2 | 7.6 | 3.8 |
| FHE1000-32F | 4 | 23.5 | 27.9 | 10.2 | 7.6 | 4.0 |

Part Numbering System

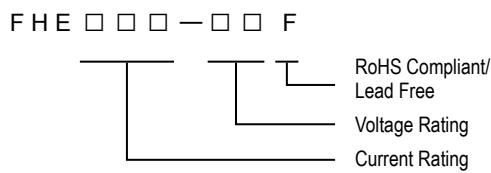

Part Marking System

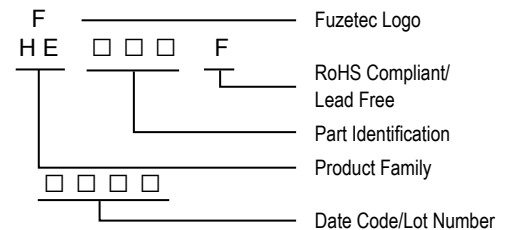

Package Information

| Part Number | Standard Package |
|------------------------|----------------------------|
| FHE050-32F~FHE070-32F | 500Pcs/Bag, 2.5K Reel/Tape |
| FHE100-32F~FHE200-32F | 300Pcs/Bag, 1.5K Reel/Tape |
| FHE300-32F | 200Pcs/Bag, 1.5K Reel/Tape |
| FHE500-32F | 200Pcs/Bag |
| FHE750-32F~FHE1000-32F | 100Pcs/Bag |

Physical specifications

| | |
|--------------------------------------------------------------------------------------------------|-------------------------------------------------------------|
| Lead material | FHE050-32F~FHE100-32F Tin plated copper clad steel, 24 AWG. |
| | FHE200-32F~FHE750-32F Tin plated copper, 20 AWG. |
| | FHE1000-32F Tin plated copper, 18 AWG. |
| Soldering characteristics | MIL-STD-202, Method 208E. |
| Insulating coating | Flame retardant epoxy, meets UL-94V-0 requirement. |
| *NOTE : Font on Marking may look slightly different due to fine turning of each Marking printer. | |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

FRHV Series



Application

Telecommunication and Data transmitting

Product Features

Low hold current, Solid state



Operation Current

0.08 A~0.40A

Maximum Operating Voltage

60V/100V/250V_{DC}

Maximum Interrupt Voltage

250V/600V_{AC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50138901) |



SVHC Compliant

Electrical Characteristics (23°C)


| Part Number | Hold Current I _H , A | Trip Current I _T , A | Max. Time to trip | | Max. Current I _{MAX} , A | Max. Oper. Voltage V _{MAX} , V _{DC} | Max. Int. Voltage V _{I-MAX} , V _{AC} | Typ. Power Pd, W | Resistance | |
|--------------|------------------------------------|------------------------------------|-------------------|-------------|--------------------------------------|----------------------------------------------------------|-----------------------------------------------------------|---------------------|------------------|-------------------|
| | | | Current A | Time Sec | | | | | R _{MIN} | R _{1MAX} |
| | | | | | | | | | | |
| FRH080-250VF | 0.08 | 0.16 | 0.35 | 4.0 | 3.0 | 100 | 250 | 1.0 | 14.00 | 33.00 |
| FRH110-250VF | 0.11 | 0.22 | 1.00 | 2.0 | 3.0 | 100 | 250 | 1.0 | 5.00 | 16.00 |
| FRH120-250VF | 0.12 | 0.24 | 1.00 | 2.0 | 3.0 | 100 | 250 | 1.0 | 4.00 | 16.00 |
| FRH145-250VF | 0.15 | 0.29 | 1.00 | 2.5 | 3.0 | 100 | 250 | 1.0 | 3.00 | 12.00 |
| FRH180-250XF | 0.18 | 0.65 | 3.00 | 2.0 | 10.0 | 100 | 250 | 1.0 | 0.80 | 4.00 |
| FRH150-600MF | 0.15 | 0.30 | 1.00 | 4.0 | 3.0 | 250 | 600 | 1.0 | 6.00 | 17.00 |
| FRH160-600MF | 0.16 | 0.32 | 1.00 | 7.0 | 3.0 | 250 | 600 | 1.0 | 4.00 | 16.00 |
| FRH160-600VF | 0.16 | 0.32 | 1.00 | 7.0 | 3.0 | 250 | 600 | 1.0 | 4.00 | 18.00 |
| FRH200-600VF | 0.20 | 0.40 | 1.00 | 12.0 | 3.0 | 250 | 600 | 1.0 | 4.00 | 13.50 |
| FRH250-600VF | 0.25 | 0.85 | 3.00 | 1.0 | 3.0 | 250 | 600 | 1.0 | 1.00 | 7.00 |
| FRH400-600F | 0.40 | 1.00 | 3.00 | 4.0 | 3.0 | 60 | 600 | 1.0 | 0.95 | 1.90 |

Thermal Derating for PPTC Device at Various Ambient Temperatures

| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 158% | 138% | 119% | 100% | 92% | 83% | 73% | 64% | 54% | 40% |


Typical Time-To-Trip at 23°C

- A = FRH080-250VF
- B = FRH110-250VF
- C = FRH120-250VF
- D = FRH145-250VF
- E = FRH180-250XF

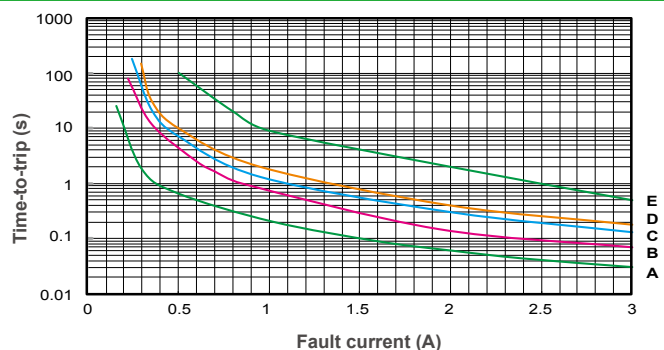

Typical Time-To-Trip at 23°C

- F = FRH150-600MF
- G = FRH160-600MF
- H = FRH160-600VF
- I = FRH200-600VF
- J = FRH250-600VF
- K = FRH400-600F

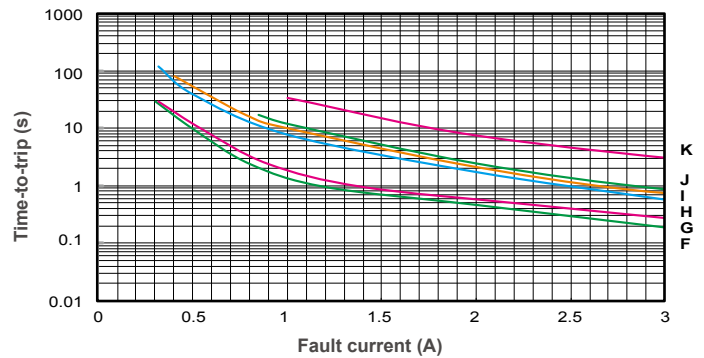

FRHV Product Dimensions (mm)


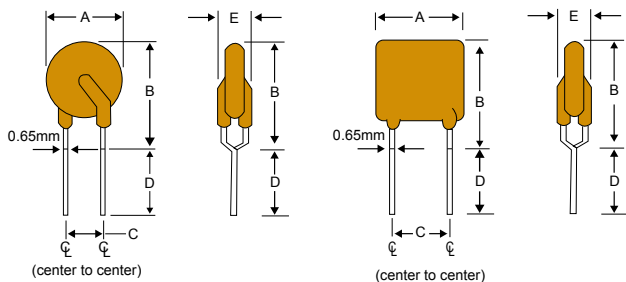


Fig.1
Lead Size : 22AWG
Φ 0.65 mm Diameter


Fig.2
Lead Size : 22AWG
Φ 0.65 mm Diameter

| Part Number | Fig. | A | B | C | D | E |
|--------------|------|------|------|------|------|------|
| | | Max. | Max. | Typ. | Min. | Max. |
| FRH080-250VF | 1 | 5.8 | 9.6 | 5.0 | 4.7 | 4.6 |
| FRH110-250VF | 1 | 6.8 | 9.9 | 5.0 | 4.7 | 4.6 |
| FRH120-250VF | 2 | 6.5 | 11.0 | 5.0 | 4.7 | 4.6 |
| FRH145-250VF | 2 | 6.5 | 11.0 | 5.0 | 4.7 | 4.6 |
| FRH180-250XF | 1 | 9.0 | 12.0 | 5.0 | 4.7 | 3.8 |
| FRH150-600MF | 2 | 9.0 | 12.5 | 5.0 | 4.7 | 4.6 |
| FRH160-600MF | 2 | 9.0 | 12.5 | 5.0 | 4.7 | 4.6 |
| FRH160-600VF | 2 | 16.0 | 12.6 | 5.0 | 4.7 | 6.0 |
| FRH200-600VF | 2 | 12.0 | 14.0 | 5.0 | 4.7 | 6.0 |
| FRH250-600VF | 2 | 12.0 | 15.0 | 5.0 | 4.7 | 6.0 |
| FRH400-600F | 2 | 15.0 | 14.5 | 5.0 | 4.7 | 6.0 |

Part Numbering System

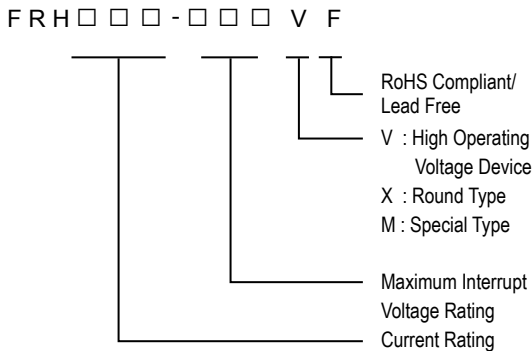

Part Marking System

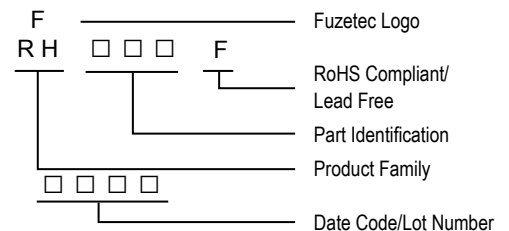

- * FRH150-600MF Marking : RH6150F
- * FRH160-600MF Marking : RH6160F
- * FRH160-600VF Marking : RH6160F
- * FRH200-600VF Marking : RH6200F
- * FRH250-600VF Marking : RH6250F
- * FRH400-600F Marking : RH6400F

Package Information

| Part Number | Standard Package |
|---------------------------|-------------------------------|
| FRH080-250VF~FRH145-250VF | : 300 Pcs/Bag, 1.5K Reel/Tape |
| FRH180-250XF | : 200 Pcs/Bag, 1.5K Reel/Tape |
| FRH150-600MF~FRH160-600MF | : 100 Pcs/Bag, 1.2K Reel/Tape |
| FRH160-600VF | : 100 Pcs/Bag, 0.6K Reel/Tape |
| FRH200-600VF~FRH400-600F | : 100 Pcs/Bag |

Physical specifications

| | |
|----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| Lead material | Tin plated copper, 22 AWG. |
| Soldering characteristics | MIL-STD-202, Method 208E. |
| Insulating coating | Flame retardant epoxy, meets UL-94V-0 requirement. |
| *NOTE : All FRHV products are designed to assist equipment to pass ITU K20/K21 UL60950 or GR1089 specification. | |
| *FRH150-600MF, FRH160-600VF meet UL497A Overvoltage and Endurance Conditioning requirements for Thermistor type component. | |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

NOTE : All Specifications subject to change without notice.

FRV Series



Application

Line Voltage Power Supply, Transformer and Appliances

Product Features

Low hold current, Solid state, Radial leaded product ideal for up to 265V_{AC/DC}



Maximum Operation Current

0.05A~2.00A

Maximum Operating Voltage

240V_{AC/DC}

Maximum Interrupt Voltage

265V_{AC/DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50087018) |



Electrical Characteristics (23°C)


| Part Number | Hold Current | Trip Current | Max. Time to trip | Max. Current | Rated Voltage | Max. Int. Voltage | Typ. Power | Resistance | |
|-------------|--------------------|--------------------|-------------------------|----------------------|---------------------------------------|-----------------------------------------|------------|------------------|-------------------|
| | I _H , A | I _T , A | at 5xI _H , S | I _{MAX} , A | V _{MAX} , V _{AC/DC} | V _{I-MAX} , V _{AC/DC} | | R _{MIN} | R _{1MAX} |
| | | | | | | | | Ohms | Ohms |
| FRV005-240F | 0.05 | 0.12 | 15.0 | 1.0 | 240 | 265 | 0.70 | 18.50 | 65.00 |
| FRV008-240F | 0.08 | 0.19 | 15.0 | 1.2 | 240 | 265 | 0.80 | 7.40 | 26.00 |
| FRV012-240F | 0.12 | 0.30 | 15.0 | 1.2 | 240 | 265 | 1.00 | 3.00 | 12.00 |
| FRV016-240F | 0.16 | 0.37 | 15.0 | 2.0 | 240 | 265 | 1.40 | 2.50 | 7.80 |
| FRV025-240F | 0.25 | 0.56 | 18.5 | 3.5 | 240 | 265 | 1.50 | 1.30 | 3.80 |
| FRV033-240F | 0.33 | 0.74 | 21.0 | 4.5 | 240 | 265 | 1.70 | 0.83 | 2.60 |
| FRV040-240F | 0.40 | 0.90 | 24.0 | 5.5 | 240 | 265 | 2.00 | 0.60 | 1.90 |
| FRV055-240F | 0.55 | 1.25 | 26.0 | 7.0 | 240 | 265 | 3.40 | 0.45 | 1.45 |
| FRV075-240F | 0.75 | 1.50 | 18.0 | 7.5 | 240 | 265 | 2.60 | 0.32 | 0.84 |
| FRV100-240F | 1.00 | 2.00 | 21.0 | 10.0 | 240 | 265 | 2.90 | 0.22 | 0.58 |
| FRV125-240F | 1.25 | 2.50 | 23.0 | 12.5 | 240 | 265 | 3.30 | 0.17 | 0.44 |
| FRV150-240F | 1.50 | 3.00 | 23.0 | 15.0 | 240 | 265 | 3.70 | 0.12 | 0.32 |
| FRV200-240F | 2.00 | 4.00 | 28.0 | 20.0 | 240 | 265 | 4.50 | 0.09 | 0.22 |

Thermal Derating for PPTC Device at Various Ambient Temperatures

| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 150% | 134% | 116% | 100% | 90% | 81% | 74% | 65% | 58% | 44% |

Typical Time-To-Trip at 23°C

- A = FRV005-240F H = FRV055-240F
- B = FRV008-240F I = FRV075-240F
- C = FRV012-240F J = FRV100-240F
- D = FRV016-240F K = FRV125-240F
- E = FRV025-240F L = FRV150-240F
- F = FRV033-240F M = FRV200-240F
- G = FRV040-240F

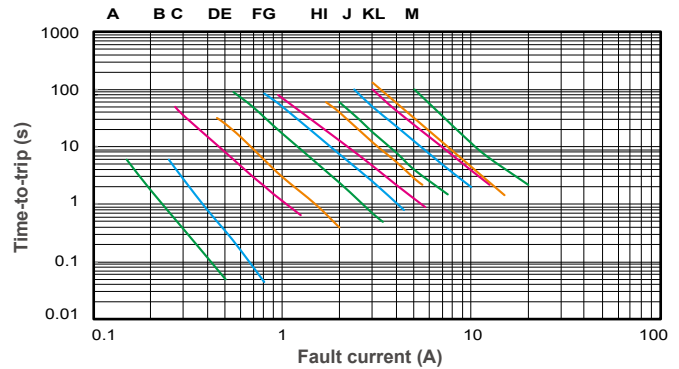

FRV Product Dimensions (mm)




Fig.1

Lead Size : 24AWG
Φ 0.51 mm Diameter




Fig.2

Lead Size : 22AWG
Φ 0.65 mm Diameter




Fig.3

Lead Size : 20AWG
Φ 0.81 mm Diameter





Fig.4


Lead Size : 20AWG
Φ 0.81 mm Diameter

| Part Number | Fig | A | B | C | D | E | F |
|-------------|-----|------|------|------|------|------|------|
| | | Max. | Max. | Typ. | Min. | Max. | Typ. |
| FRV005-240F | 1 | 8.3 | 10.7 | 5.1 | 7.6 | 3.8 | 1.6 |
| FRV008-240F | 1 | 8.3 | 10.7 | 5.1 | 7.6 | 3.8 | 1.6 |
| FRV012-240F | 1 | 8.3 | 10.7 | 5.1 | 7.6 | 3.8 | 1.6 |
| FRV016-240F | 1 | 9.9 | 12.5 | 5.1 | 7.6 | 3.8 | 1.6 |
| FRV025-240F | 2 | 9.6 | 17.4 | 5.1 | 7.6 | 3.8 | 1.8 |
| FRV033-240F | 2 | 11.4 | 16.5 | 5.1 | 7.6 | 3.8 | 1.8 |
| FRV040-240F | 2 | 11.5 | 19.5 | 5.1 | 7.6 | 3.8 | 1.8 |
| FRV055-240F | 3 | 14.0 | 21.7 | 5.1 | 7.6 | 4.1 | 1.9 |
| FRV075-240F | 3 | 11.5 | 23.4 | 5.1 | 7.6 | 4.8 | 1.9 |
| FRV100-240F | 4 | 18.7 | 24.4 | 10.2 | 7.6 | 5.1 | 1.9 |
| FRV125-240F | 4 | 21.2 | 27.4 | 10.2 | 7.6 | 5.3 | 1.9 |
| FRV150-240F | 4 | 23.4 | 30.9 | 10.2 | 7.6 | 5.3 | 1.9 |
| FRV200-240F | 3 | 24.9 | 33.8 | 10.2 | 7.6 | 6.1 | 1.9 |

Part Numbering System

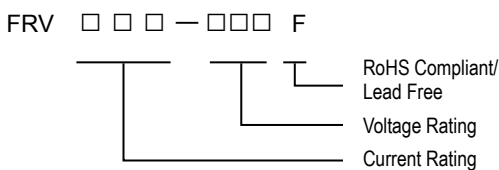

Part Marking System

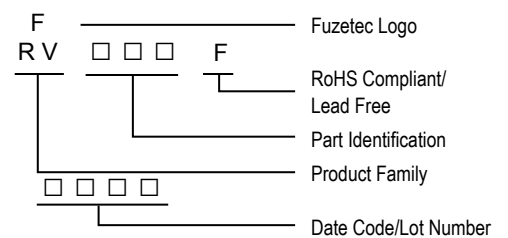

Package Information

| Part Number | Standard Package |
|-------------------------|-----------------------------|
| FRV005-240F~FRV016-240F | 500 Pcs/Bag, 2.0K Reel/Tape |
| FRV025-240F | 300 Pcs/Bag, 2.0K Reel/Tape |
| FRV033-240F~FRV040-240F | 200 Pcs/Bag, 2.0K Reel/Tape |
| FRV055-240F | 200 Pcs/Bag, 1.0K Reel/Tape |
| FRV075-240F | 200 Pcs/Bag, 2.0K Reel/Tape |
| FRV100-240F~FRV200-240F | 100 Pcs/Bag |

Physical specifications


| | |
|---------------------------|--------------------------------------------------------------|
| Lead material | FRV005-240F~FRV016-240F Tin plated copper clad steel, 24AWG. |
| | FRV025-240F~FRV040-240F Tin plated copper, 22AWG. |
| | FRV055-240F~FRV200-240F Tin plated copper, 20AWG. |
| Soldering characteristics | MIL-STD-202, Method 208E. |
| Insulating coating | Flame retardant epoxy, meets UL-94V-0 requirement. |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

FRVL Series

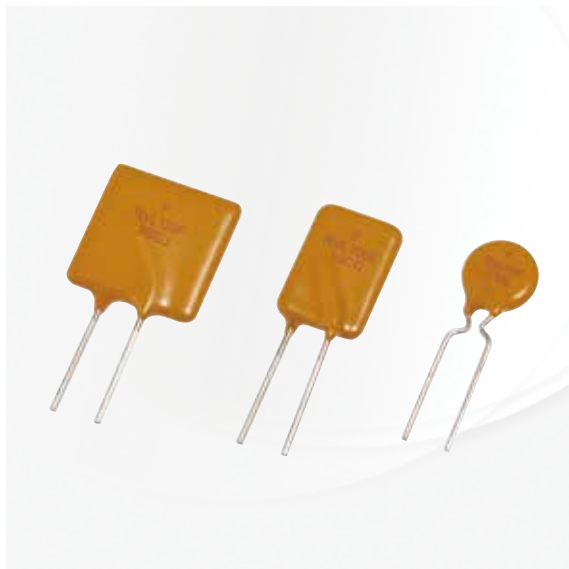

Application

Line Voltage Power Supply, Transformer and Appliances Product

Features

Solid state, Radial leaded product ideal for up to 120V_{AC/DC}



Maximum Operation Current

0.10A~3.75A

Maximum Voltage

120V_{AC/DC}

Maximum Interrupt Voltage

135V_{AC/DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50122733) |



SVHC Compliant

Electrical Characteristics (23°C)

| Part Number | Hold Current I _H , A | Trip Current I _T , A | Max. Time to trip at 5xI _H , s | Max. Current I _{MAX} , A | Max. Oper. Voltage V _{MAX} , V _{AC/DC} | Max. Int. Voltage V _{I-MAX} , V _{AC/DC} | Typ. Power Pd, W | Resistance | |
|--------------|------------------------------------|------------------------------------|----------------------------------------------|--------------------------------------|-------------------------------------------------------------|--------------------------------------------------------------|---------------------|------------------|-------------------|
| | | | | | | | | R _{MIN} | R _{1MAX} |
| | | | | | | | | Ohms | Ohms |
| FRVL010-120F | 0.10 | 0.20 | 10.0 | 2.0 | 120 | 135 | 0.84 | 3.00 | 7.50 |
| FRVL017-120F | 0.17 | 0.34 | 10.0 | 2.0 | 120 | 135 | 0.84 | 2.00 | 7.00 |
| FRVL020-120F | 0.20 | 0.40 | 9.0 | 2.0 | 120 | 135 | 1.08 | 1.83 | 4.40 |
| FRVL025-120F | 0.25 | 0.50 | 7.5 | 3.0 | 120 | 135 | 1.08 | 1.25 | 3.00 |
| FRVL030-120F | 0.30 | 0.60 | 8.5 | 3.0 | 120 | 135 | 1.44 | 0.88 | 2.10 |
| FRVL040-120F | 0.40 | 0.80 | 6.5 | 3.0 | 120 | 135 | 1.44 | 0.55 | 1.29 |
| FRVL050-120F | 0.50 | 1.00 | 6.0 | 3.0 | 120 | 135 | 1.56 | 0.50 | 1.17 |
| FRVL065-120F | 0.65 | 1.30 | 5.7 | 5.0 | 120 | 135 | 1.68 | 0.31 | 0.72 |
| FRVL070-120F | 0.75 | 1.50 | 6.3 | 5.0 | 120 | 135 | 1.80 | 0.25 | 0.60 |
| FRVL075-120F | 0.75 | 1.50 | 15.0 | 7.5 | 120 | 135 | 2.64 | 0.25 | 0.69 |
| FRVL090-120F | 0.90 | 1.80 | 7.2 | 5.0 | 120 | 135 | 1.80 | 0.20 | 0.47 |
| FRVL100-120F | 1.00 | 2.00 | 15.0 | 10.0 | 120 | 135 | 2.64 | 0.18 | 0.47 |
| FRVL110-120F | 1.10 | 2.20 | 8.2 | 8.0 | 120 | 135 | 2.28 | 0.15 | 0.38 |
| FRVL125-120F | 1.25 | 2.50 | 20.0 | 12.5 | 120 | 135 | 2.88 | 0.11 | 0.33 |
| FRVL130-120F | 1.35 | 2.70 | 9.6 | 10.0 | 120 | 135 | 2.64 | 0.12 | 0.30 |
| FRVL135-120F | 1.35 | 2.70 | 20.0 | 13.5 | 120 | 135 | 3.12 | 0.11 | 0.30 |
| FRVL160-120F | 1.60 | 3.20 | 11.4 | 12.0 | 120 | 135 | 3.12 | 0.09 | 0.22 |
| FRVL185-120F | 1.85 | 3.70 | 12.6 | 12.0 | 120 | 135 | 3.36 | 0.08 | 0.19 |
| FRVL200-120F | 2.00 | 4.20 | 36.0 | 20.0 | 120 | 135 | 4.32 | 0.08 | 0.21 |
| FRVL250-120F | 2.50 | 5.00 | 15.6 | 15.0 | 120 | 135 | 4.44 | 0.05 | 0.13 |
| FRVL300-120F | 3.00 | 6.00 | 19.8 | 17.0 | 120 | 135 | 4.56 | 0.04 | 0.10 |
| FRVL375-120F | 3.75 | 7.50 | 24.0 | 20.0 | 120 | 135 | 4.80 | 0.03 | 0.08 |



Thermal Derating for PPTC Device at Various Ambient Temperatures

| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 158% | 138% | 119% | 100% | 90% | 80% | 70% | 60% | 50% | 38% |

Typical Time-To-Trip at 23°C

- A = FRVL010-120F J = FRVL090-120F
- B = FRVL017-120F K = FRVL110-120F
- C = FRVL020-120F L = FRVL130-120F
- D = FRVL025-120F M = FRVL160-120F
- E = FRVL030-120F N = FRVL185-120F
- F = FRVL040-120F O = FRVL250-120F
- G = FRVL050-120F P = FRVL300-120F
- H = FRVL065-120F Q = FRVL375-120F
- I = FRVL070-120F

- R = FRVL075-120F
- S = FRVL100-120F
- T = FRVL125-120F
- U = FRVL135-120F
- V = FRVL200-120F

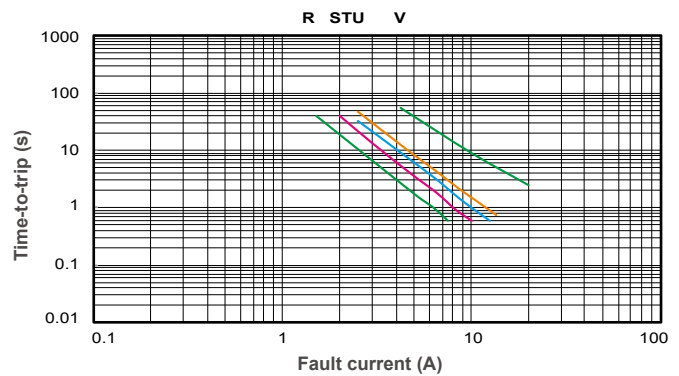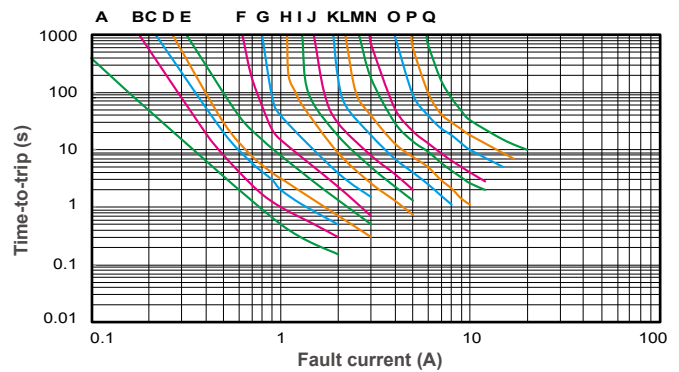

FRVL Product Dimensions (mm)




Fig.1
Lead Size : 24AWG
Φ 0.51 mm Diameter




Fig.2
Lead Size : 22AWG
Φ 0.65 mm Diameter




Fig.3
Lead Size : 20AWG
Φ 0.81 mm Diameter






Fig.4
Lead Size : 20AWG
Φ 0.81 mm Diameter

| Part Number | Fig. | A | B | C | D | E | F |
|--------------|------|------|------|------|------|------|------|
| | | Max. | Max. | Typ. | Min. | Max. | Typ. |
| FRVL010-120F | 1 | 7.9 | 13.0 | 5.1 | 7.6 | 3.8 | 2.2 |
| FRVL017-120F | 1 | 7.9 | 13.0 | 5.1 | 7.6 | 3.8 | 2.2 |
| FRVL020-120F | 2 | 7.9 | 13.0 | 5.1 | 7.6 | 3.8 | 2.2 |
| FRVL025-120F | 2 | 7.9 | 13.0 | 5.1 | 7.6 | 3.8 | 2.2 |
| FRVL030-120F | 2 | 7.9 | 13.0 | 5.1 | 7.6 | 3.8 | 2.2 |
| FRVL040-120F | 2 | 8.2 | 14.2 | 5.1 | 7.6 | 3.8 | 2.2 |
| FRVL050-120F | 2 | 9.2 | 14.9 | 5.1 | 7.6 | 3.8 | 2.2 |
| FRVL065-120F | 2 | 9.7 | 14.9 | 5.1 | 7.6 | 3.8 | 2.2 |
| FRVL070-120F | 2 | 10.6 | 15.5 | 5.1 | 7.6 | 3.8 | 2.2 |
| FRVL075-120F | 4 | 10.9 | 17.0 | 5.1 | 7.6 | 4.1 | 2.2 |
| FRVL090-120F | 2 | 11.9 | 15.9 | 5.1 | 7.6 | 3.8 | 2.2 |
| FRVL100-120F | 4 | 11.5 | 20.1 | 5.1 | 7.6 | 4.1 | 2.2 |
| FRVL110-120F | 3 | 13.3 | 18.3 | 5.1 | 7.6 | 4.1 | 2.2 |
| FRVL125-120F | 4 | 14.0 | 21.7 | 5.1 | 7.6 | 4.1 | 2.2 |
| FRVL130-120F | 3 | 15.5 | 20.6 | 5.1 | 7.6 | 4.1 | 2.2 |
| FRVL135-120F | 4 | 16.3 | 21.7 | 5.1 | 7.6 | 4.1 | 2.2 |
| FRVL160-120F | 3 | 17.5 | 22.5 | 5.1 | 7.6 | 4.1 | 2.2 |
| FRVL185-120F | 3 | 19.9 | 24.9 | 5.1 | 7.6 | 4.1 | 2.2 |
| FRVL200-120F | 4 | 23.5 | 27.9 | 10.2 | 7.6 | 4.1 | 2.2 |
| FRVL250-120F | 3 | 22.5 | 27.5 | 10.2 | 7.6 | 4.1 | 2.2 |
| FRVL300-120F | 3 | 25.5 | 30.0 | 10.2 | 7.6 | 4.1 | 2.2 |
| FRVL375-120F | 3 | 29.5 | 34.0 | 10.2 | 7.6 | 4.1 | 2.2 |

Part Numbering System

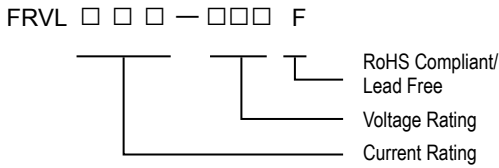

Part Marking System

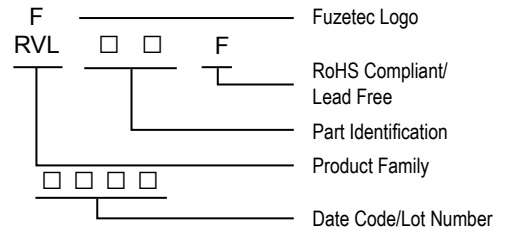

Package Information

| Part Number | Standard Package |
|---------------------------|-------------------------------|
| FRVL010-120F~FRVL050-120F | : 500 Pcs/Bag, 2.0K Reel/Tape |
| FRVL065-120F~FRVL075-120F | : 300 Pcs/Bag, 1.5K Reel/Tape |
| FRVL090-120F | : 300 Pcs/Bag, 2.0K Reel/Tape |
| FRVL100-120F~FRVL110-120F | : 300 Pcs/Bag, 1.5K Reel/Tape |
| FRVL125-120F~FRVL135-120F | : 200 Pcs/Bag, 1.0K Reel/Tape |
| FRVL160-120F | : 200 Pcs/Bag |
| FRVL185-120F~FRVL375-120F | : 100 Pcs/Bag |

Physical specifications

| | |
|---------------------------|----------------------------------------------------------------------|
| Lead material | FRVL010-120F Tin plated copper clad steel, 24AWG. |
| | FRVL017-120F Tin plated copper, 24AWG. |
| | FRVL020-120F~FRVL070-120F and FRVL090-120F Tin plated copper, 22AWG. |
| | FRVL075-120F and FRVL100-120F~FRVL375-120F Tin plated copper, 20AWG. |
| Soldering characteristics | MIL-STD-202, Method 208E. |
| Insulating coating | Flame retardant epoxy, meets UL-94V-0 requirement. |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.



FUZETEC

Package Size: 2920 - 0402


Current Rating: Up to 3A

Voltage Rating: 6 - 60V



SMD PPTC Series

FSMD2920 Series

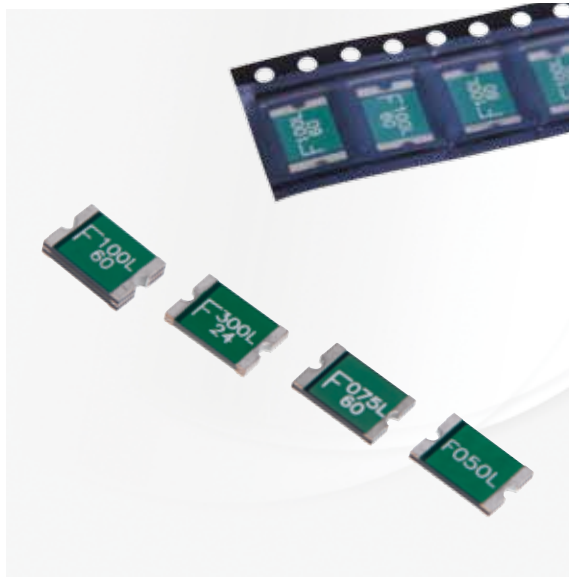

Application

All high-density boards

Product Features

2920 Dimension, Surface mountable, Solid state, Faster time to trip than standard SMD devices.



Operation Current

0.30A~5.00A

Maximum Voltage

6V~60V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50090556) |



SVHC Compliant

Electrical Characteristics (23°C)

| Part Number | Hold Current | Trip Current | Rated Voltage | Max. Current | Typ. Power | Max. Time to trip | | Resistance | |
|-------------------|--------------|--------------|---------------|--------------|------------|--------------------|--------------------|------------------------------------|----------------------|
| | | | | | | Current | Time | R _{MIN} | R _{1MAX} |
| | | | | | | I _H , A | I _T , A | V _{MAX} , V _{DC} | I _{MAX} , A |
| FSMD030-2920-R | 0.30 | 0.60 | 60 | 100 | 1.5 | 1.5 | 3.0 | 1.000 | 4.800 |
| FSMD050-2920-R | 0.50 | 1.00 | 60 | 100 | 1.5 | 2.5 | 4.0 | 0.300 | 1.400 |
| FSMD075-2920-R | 0.75 | 1.50 | 33 | 100 | 1.5 | 8.0 | 0.3 | 0.180 | 1.000 |
| FSMD075-60-2920-R | 0.75 | 1.50 | 60 | 100 | 1.5 | 8.0 | 0.3 | 0.180 | 1.000 |
| FSMD100-2920-R | 1.10 | 2.20 | 33 | 100 | 1.5 | 8.0 | 0.5 | 0.090 | 0.410 |
| FSMD110-60-2920R | 1.10 | 2.20 | 60 | 100 | 1.5 | 8.0 | 0.5 | 0.090 | 0.410 |
| FSMD125-2920-R | 1.25 | 2.50 | 33 | 100 | 1.5 | 8.0 | 2.0 | 0.050 | 0.250 |
| FSMD150-2920-R | 1.50 | 3.00 | 33 | 100 | 1.5 | 8.0 | 2.0 | 0.050 | 0.230 |
| FSMD185-2920-R | 1.85 | 3.70 | 33 | 100 | 1.5 | 8.0 | 2.5 | 0.040 | 0.150 |
| FSMD200-2920-R | 2.00 | 4.00 | 16 | 100 | 1.5 | 8.0 | 5.0 | 0.035 | 0.120 |
| FSMD200-24-2920-R | 2.00 | 4.00 | 24 | 100 | 1.5 | 8.0 | 5.0 | 0.035 | 0.120 |
| FSMD250-2920-R | 2.50 | 5.00 | 16 | 100 | 1.5 | 8.0 | 16.0 | 0.025 | 0.085 |
| FSMD260-2920-R | 2.60 | 5.20 | 6 | 100 | 1.5 | 8.0 | 20.0 | 0.020 | 0.075 |
| FSMD260-24-2920R | 2.60 | 5.20 | 24 | 100 | 1.5 | 8.0 | 20.0 | 0.020 | 0.075 |
| FSMD300-2920-R | 3.00 | 5.20 | 6 | 100 | 1.5 | 8.0 | 25.0 | 0.010 | 0.048 |
| FSMD300-15-2920R | 3.00 | 5.20 | 15 | 100 | 1.5 | 8.0 | 20.0 | 0.010 | 0.048 |
| FSMD300-24-2920R | 3.00 | 5.20 | 24 | 100 | 1.5 | 8.0 | 20.0 | 0.010 | 0.048 |
| FSMD330-2920R | 3.30 | 5.50 | 24 | 100 | 1.5 | 8.0 | 20.0 | 0.010 | 0.048 |
| FSMD400-16-2920R | 4.00 | 8.00 | 16 | 100 | 1.5 | 20.0 | 4.0 | 0.010 | 0.040 |
| FSMD500-16-2920R | 5.00 | 10.00 | 16 | 100 | 1.5 | 20.0 | 5.0 | 0.005 | 0.025 |

Thermal Derating for PPTC Device at Various Ambient Temperatures

| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 145% | 130% | 115% | 100% | 92% | 85% | 78% | 70% | 62% | 50% |

FSMD2016 Series



Application

All high-density boards

Product Features

Small surface mount, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices



Operation Current

0.30A~2.00A

Maximum Voltage

6V~60V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50090556) |



Electrical Characteristics (23°C)


| Part Number | Hold Current | Trip Current | Rated Voltage | Max. Current | Typ. Power | Max. Time to trip | | Resistance | |
|-------------------|--------------|--------------|-----------------------------|---------------|------------|-------------------|------|------------|------------|
| | I_H , A | I_T , A | V_{MAX} , V _{DC} | I_{MAX} , A | P_d , W | Current | Time | R_{MIN} | $R1_{MAX}$ |
| | | | | | | A | Sec | Ohms | Ohms |
| FSMD030-2016-R | 0.30 | 0.60 | 60 | 100 | 1.4 | 1.5 | 3.0 | 0.400 | 2.300 |
| FSMD050-2016R | 0.55 | 1.10 | 60 | 100 | 1.4 | 2.5 | 5.0 | 0.200 | 1.000 |
| FSMD075-2016R | 0.75 | 1.50 | 60 | 100 | 1.4 | 8.0 | 0.5 | 0.130 | 0.900 |
| FSMD100-2016-R | 1.10 | 2.20 | 15 | 100 | 1.4 | 8.0 | 0.5 | 0.070 | 0.400 |
| FSMD100-33-2016-R | 1.10 | 2.20 | 33 | 100 | 1.4 | 8.0 | 0.5 | 0.070 | 0.400 |
| FSMD150-2016-R | 1.50 | 3.00 | 15 | 100 | 1.4 | 8.0 | 0.8 | 0.050 | 0.180 |
| FSMD200-2016-R | 2.00 | 4.20 | 6 | 100 | 1.4 | 8.0 | 3.0 | 0.030 | 0.100 |

Thermal Derating for PPTC Device at Various Ambient Temperatures


| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 157% | 133% | 118% | 100% | 90% | 81% | 70% | 60% | 51% | 36% |

Typical Time-To-Trip at 23°C

- A = FSMD030-2016-R
- B = FSMD050-2016R
- C = FSMD075-2016R
- D = FSMD100-2016-R
- E = FSMD100-33-2016-R
- F = FSMD150-2016-R
- G = FSMD200-2016-R

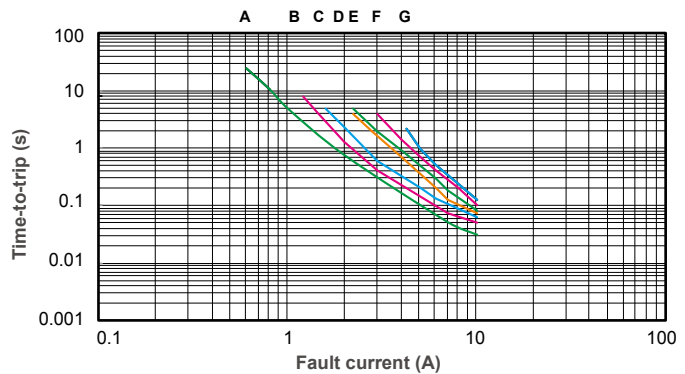


FSMD2016 Product Dimensions (mm)

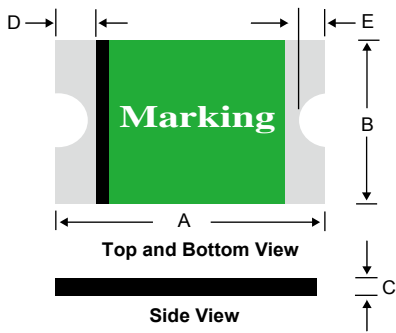


| Part Number | A | | B | | C | | D | | E | |
|-------------------|------|------|------|------|------|------|------|------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| FSMD030-2016-R | 4.72 | 5.44 | 3.70 | 4.43 | 0.40 | 1.15 | 0.30 | 1.50 | 0.25 | 0.65 |
| FSMD050-2016R | 4.72 | 5.44 | 3.70 | 4.43 | 0.40 | 1.70 | 0.30 | 1.50 | 0.25 | 0.65 |
| FSMD075-2016R | 4.72 | 5.44 | 3.70 | 4.43 | 0.40 | 1.70 | 0.30 | 1.50 | 0.25 | 0.65 |
| FSMD100-2016-R | 4.72 | 5.44 | 3.70 | 4.43 | 0.30 | 0.70 | 0.30 | 1.50 | 0.25 | 0.65 |
| FSMD100-33-2016-R | 4.72 | 5.44 | 3.70 | 4.43 | 0.30 | 0.70 | 0.30 | 1.50 | 0.25 | 0.65 |
| FSMD150-2016-R | 4.72 | 5.44 | 3.70 | 4.43 | 0.25 | 0.65 | 0.30 | 1.50 | 0.25 | 0.65 |
| FSMD200-2016-R | 4.72 | 5.44 | 3.70 | 4.43 | 0.25 | 0.55 | 0.30 | 1.50 | 0.25 | 0.65 |

*For Reflow Soldering Profile information, please refer to P.69 "IX APPENDIX – SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS "



Part Numbering System

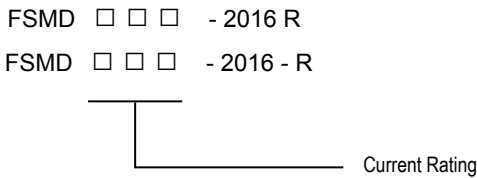

OR

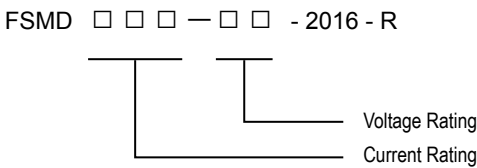

Part Marking System

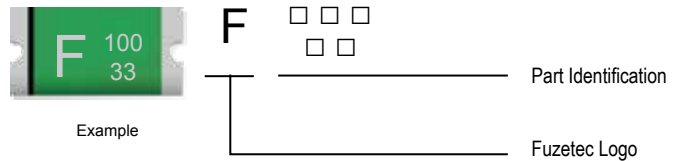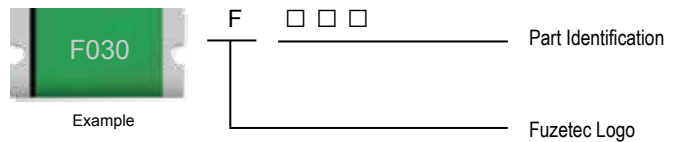

Package Information

| Part Number | Standard Package |
|-------------------------------|------------------|
| FSMD030-2016-R | : 2.0K Reel/Tape |
| FSMD050-2016R~FSMD075-2016R | : 1.0K Reel/Tape |
| FSMD100-2016-R~FSMD200-2016-R | : 2.0K Reel/Tape |

Physical specifications


| | |
|---------------------------|--------------------------------------------------------------|
| Termination pad materials | Pure Tin |
| Soldering characteristics | Meets EIA specification RS 186-9E, ANSI/J-std-002 Category 3 |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

FSMD1812 Series

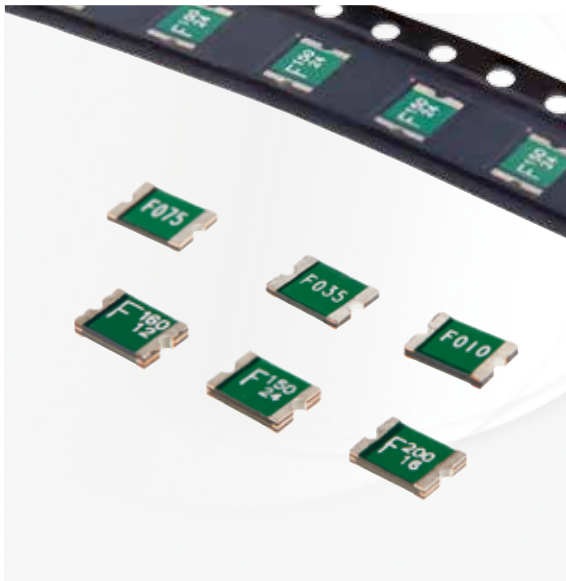

Application

All high-density boards

Product Features

Small surface mount, Solid state Faster time to trip than standard SMD devices Lower resistance than standard SMD devices



Operation Current

0.10A~3.00A

Maximum Voltage

6V~60V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|---------------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50004084/R50090556) |



SVHC Compliant

Electrical Characteristics (23°C)


| Part Number | Hold Current | Trip Current | Rated Voltage | Max. Current | Typ. Power | Max. Time to trip | | Resistance | |
|--------------|--------------|--------------|---------------|--------------|------------|-------------------|-------|------------------|-------------------|
| | | | | | | Current | Time | R _{MIN} | R _{1MAX} |
| | | | | | | A | Sec | Ohms | Ohms |
| FSMD010-R | 0.10 | 0.30 | 60.0 | 100 | 0.8 | 8.0 | 0.020 | 1.600 | 15.000 |
| FSMD014-R | 0.14 | 0.30 | 60.0 | 100 | 0.8 | 8.0 | 0.008 | 1.200 | 6.500 |
| FSMD020-R | 0.20 | 0.40 | 30.0 | 100 | 0.8 | 8.0 | 0.020 | 0.800 | 5.000 |
| FSMD020-60-R | 0.20 | 0.40 | 60.0 | 100 | 0.8 | 8.0 | 0.020 | 0.800 | 5.000 |
| FSMD030-R | 0.30 | 0.60 | 30.0 | 100 | 0.8 | 8.0 | 0.100 | 0.200 | 1.750 |
| FSMD035-R | 0.35 | 0.70 | 16.0 | 100 | 0.8 | 8.0 | 0.100 | 0.320 | 1.500 |
| FSMD035-30-R | 0.35 | 0.70 | 30.0 | 100 | 0.8 | 8.0 | 0.100 | 0.320 | 1.500 |
| FSMD050-R | 0.50 | 1.00 | 16.0 | 100 | 0.8 | 8.0 | 0.150 | 0.150 | 1.000 |
| FSMD050-30-R | 0.50 | 1.00 | 30.0 | 100 | 0.8 | 8.0 | 0.150 | 0.150 | 1.000 |
| FSMD075-R | 0.75 | 1.50 | 16.0 | 100 | 0.8 | 8.0 | 0.200 | 0.110 | 0.450 |
| FSMD075-24R | 0.75 | 1.50 | 24.0 | 100 | 1.0 | 8.0 | 0.200 | 0.110 | 0.290 |
| FSMD075-33R | 0.75 | 1.50 | 33.0 | 100 | 1.0 | 8.0 | 0.200 | 0.110 | 0.400 |
| FSMD110-R | 1.10 | 2.20 | 8.0 | 100 | 0.8 | 8.0 | 0.300 | 0.040 | 0.210 |
| FSMD110-16-R | 1.10 | 2.20 | 16.0 | 100 | 0.8 | 8.0 | 0.500 | 0.060 | 0.180 |
| FSMD110-24R | 1.10 | 2.20 | 24.0 | 100 | 1.0 | 8.0 | 0.500 | 0.060 | 0.200 |
| FSMD110-33R | 1.10 | 2.20 | 33.0 | 100 | 0.8 | 8.0 | 0.500 | 0.060 | 0.200 |
| FSMD125-R | 1.25 | 2.50 | 6.0 | 100 | 0.8 | 8.0 | 0.400 | 0.050 | 0.140 |
| FSMD125-16R | 1.25 | 2.50 | 16.0 | 100 | 0.8 | 8.0 | 0.400 | 0.050 | 0.140 |
| FSMD150-R | 1.50 | 3.00 | 8.0 | 100 | 0.8 | 8.0 | 0.500 | 0.040 | 0.110 |
| FSMD150-12R | 1.50 | 3.00 | 12.0 | 100 | 1.0 | 8.0 | 0.500 | 0.040 | 0.110 |
| FSMD150-24R | 1.50 | 3.00 | 24.0 | 100 | 1.0 | 8.0 | 1.500 | 0.040 | 0.120 |
| FSMD160-R | 1.60 | 3.20 | 8.0 | 100 | 0.8 | 8.0 | 0.500 | 0.030 | 0.100 |
| FSMD160-12R | 1.60 | 3.20 | 12.0 | 100 | 1.0 | 8.0 | 1.000 | 0.030 | 0.100 |
| FSMD160-16R | 1.60 | 3.20 | 16.0 | 100 | 1.0 | 8.0 | 1.000 | 0.030 | 0.100 |
| FSMD160-24R | 1.60 | 3.20 | 24.0 | 100 | 1.0 | 8.0 | 1.000 | 0.030 | 0.100 |
| FSMD200R | 2.00 | 3.50 | 8.0 | 100 | 1.0 | 8.0 | 2.000 | 0.020 | 0.070 |
| FSMD200-16R | 2.00 | 3.50 | 16.0 | 100 | 1.0 | 8.0 | 5.000 | 0.020 | 0.085 |
| FSMD260R | 2.60 | 5.00 | 8.0 | 100 | 1.0 | 8.0 | 2.500 | 0.015 | 0.047 |
| FSMD260-13R | 2.60 | 5.00 | 13.2 | 100 | 1.3 | 8.0 | 5.000 | 0.015 | 0.050 |
| FSMD260-16R | 2.60 | 5.00 | 16.0 | 100 | 1.3 | 8.0 | 5.000 | 0.015 | 0.050 |
| FSMD300R | 3.00 | 5.00 | 6.0 | 100 | 1.0 | 8.0 | 4.000 | 0.012 | 0.040 |

Thermal Derating for PPTC Device at Various Ambient Temperatures


| | | | | | | | | | | |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
| DERATING % | 145% | 130% | 116% | 100% | 91% | 84% | 78% | 69% | 61% | 50% |

Typical Time-To-Trip at 23°C

- A = FSMD010-R
- B = FSMD014-R
- C = FSMD020-R / 020-60-R
- D = FSMD030-R
- E = FSMD035-R / 035-30-R
- F = FSMD050-R / 050-30-R
- G = FSMD075-R / 075-24R/075-33R
- H = FSMD110-R / 110-16-R / 110-24R / 110-33R
- I = FSMD125-R / 125-16R
- J = FSMD150-R / 150-12R / 150-24R
- K = FSMD160-R / 160-12R / 160-16R / 160-24R
- L = FSMD200R / 200-16R
- M = FSMD260R / 260-13R / 260-16R
- N = FSMD300R

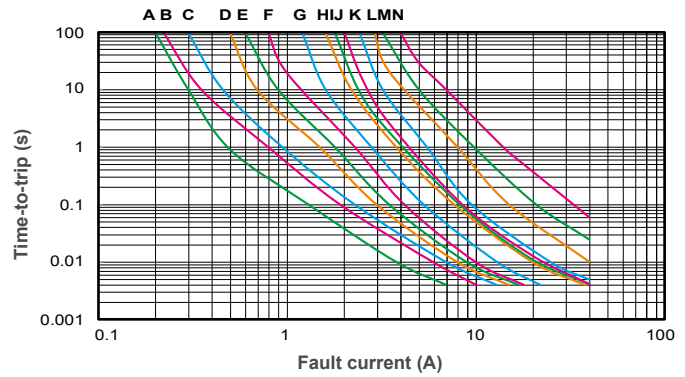


FSMD1812 Product Dimensions (mm)

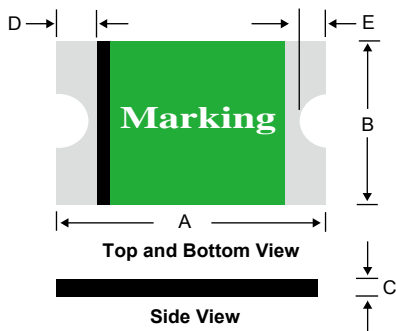


*For Reflow Soldering Profile information, please refer to P.69 " IX APPENDIX - SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS "

| Part Number | A | | B | | C | | D | | E | |
|--------------|------|------|------|------|------|------|------|------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| FSMD010-R | 4.37 | 4.73 | 3.07 | 3.41 | 0.60 | 0.90 | 0.30 | 0.95 | 0.25 | 0.65 |
| FSMD014-R | 4.37 | 4.73 | 3.07 | 3.41 | 0.60 | 0.90 | 0.30 | 0.95 | 0.25 | 0.65 |
| FSMD020-R | 4.37 | 4.73 | 3.07 | 3.41 | 0.60 | 0.90 | 0.30 | 0.95 | 0.25 | 0.65 |
| FSMD020-60-R | 4.37 | 4.73 | 3.07 | 3.41 | 0.60 | 0.90 | 0.30 | 0.95 | 0.25 | 0.65 |
| FSMD030-R | 4.37 | 4.73 | 3.07 | 3.41 | 0.40 | 0.70 | 0.30 | 0.95 | 0.25 | 0.65 |
| FSMD035-R | 4.37 | 4.73 | 3.07 | 3.41 | 0.40 | 0.70 | 0.30 | 0.95 | 0.25 | 0.65 |
| FSMD035-30-R | 4.37 | 4.73 | 3.07 | 3.41 | 0.40 | 0.70 | 0.30 | 0.95 | 0.25 | 0.65 |
| FSMD050-R | 4.37 | 4.73 | 3.07 | 3.41 | 0.35 | 0.65 | 0.30 | 0.95 | 0.25 | 0.65 |
| FSMD050-30-R | 4.37 | 4.73 | 3.07 | 3.41 | 0.45 | 0.75 | 0.30 | 0.95 | 0.25 | 0.65 |
| FSMD075-R | 4.37 | 4.73 | 3.07 | 3.41 | 0.35 | 0.65 | 0.30 | 0.95 | 0.25 | 0.65 |
| FSMD075-24R | 4.37 | 4.73 | 3.07 | 3.41 | 0.80 | 1.55 | 0.25 | 0.95 | 0.25 | 0.65 |
| FSMD075-33R | 4.37 | 4.73 | 3.07 | 3.41 | 0.80 | 1.55 | 0.25 | 0.95 | 0.25 | 0.65 |
| FSMD110-R | 4.37 | 4.73 | 3.07 | 3.41 | 0.25 | 0.55 | 0.30 | 0.95 | 0.25 | 0.65 |
| FSMD110-16-R | 4.37 | 4.73 | 3.07 | 3.41 | 0.25 | 0.90 | 0.30 | 0.95 | 0.25 | 0.65 |
| FSMD110-24R | 4.37 | 4.73 | 3.07 | 3.41 | 0.80 | 1.30 | 0.25 | 0.95 | 0.25 | 0.65 |
| FSMD110-33R | 4.37 | 4.73 | 3.07 | 3.41 | 0.80 | 1.30 | 0.25 | 0.95 | 0.25 | 0.65 |
| FSMD125-R | 4.37 | 4.73 | 3.07 | 3.41 | 0.25 | 0.55 | 0.30 | 0.95 | 0.25 | 0.65 |
| FSMD125-16R | 4.37 | 4.73 | 3.07 | 3.41 | 0.50 | 1.00 | 0.30 | 0.95 | 0.25 | 0.65 |
| FSMD150-R | 4.37 | 4.73 | 3.07 | 3.41 | 0.25 | 0.55 | 0.30 | 0.95 | 0.25 | 0.65 |
| FSMD150-12R | 4.37 | 4.73 | 3.07 | 3.41 | 0.60 | 1.10 | 0.25 | 0.95 | 0.25 | 0.65 |
| FSMD150-24R | 4.37 | 4.73 | 3.07 | 3.41 | 0.60 | 1.55 | 0.25 | 0.95 | 0.25 | 0.65 |
| FSMD160-R | 4.37 | 4.73 | 3.07 | 3.41 | 0.25 | 0.90 | 0.30 | 0.95 | 0.25 | 0.65 |
| FSMD160-12R | 4.37 | 4.73 | 3.07 | 3.41 | 0.60 | 1.35 | 0.25 | 0.95 | 0.25 | 0.65 |
| FSMD160-16R | 4.37 | 4.73 | 3.07 | 3.41 | 0.60 | 1.35 | 0.25 | 0.95 | 0.25 | 0.65 |
| FSMD160-24R | 4.37 | 4.73 | 3.07 | 3.41 | 0.55 | 1.20 | 0.25 | 0.95 | 0.25 | 0.65 |
| FSMD200R | 4.37 | 4.73 | 3.07 | 3.41 | 0.55 | 1.20 | 0.25 | 0.95 | 0.25 | 0.65 |
| FSMD200-16R | 4.37 | 4.73 | 3.07 | 3.41 | 0.60 | 1.55 | 0.25 | 0.95 | 0.25 | 0.65 |
| FSMD260R | 4.37 | 4.73 | 3.07 | 3.41 | 0.55 | 1.20 | 0.25 | 0.95 | 0.25 | 0.65 |
| FSMD260-13R | 4.37 | 4.73 | 3.07 | 3.41 | 0.80 | 1.55 | 0.25 | 0.95 | 0.25 | 0.65 |
| FSMD260-16R | 4.37 | 4.73 | 3.07 | 3.41 | 0.80 | 1.55 | 0.25 | 0.95 | 0.25 | 0.65 |
| FSMD300R | 4.37 | 4.73 | 3.07 | 3.41 | 0.80 | 1.55 | 0.25 | 0.95 | 0.25 | 0.65 |



Part Numbering System

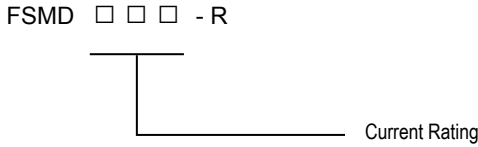

OR

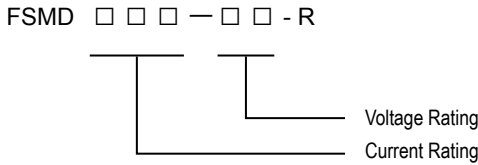

Part Marking System

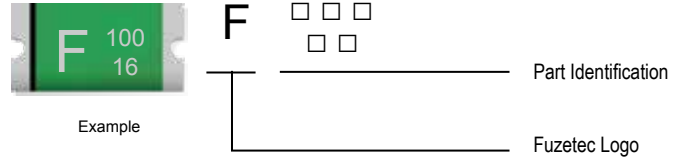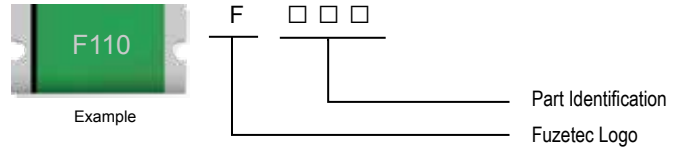

Package Information

| Part Number | Standard Package |
|-------------------------|------------------|
| FSMD010-R~FSMD075-R | 2.0K Reel/Tape |
| FSMD075-24R~FSMD075-33R | 1.5K Reel/Tape |
| FSMD110-R~FSMD110-16-R | 2.0K Reel/Tape |
| FSMD110-24R~FSMD110-33R | 1.5K Reel/Tape |
| FSMD125-R | 2.0K Reel/Tape |
| FSMD125-16R | 1.5K Reel/Tape |
| FSMD150-R~FSMD200R | 2.0K Reel/Tape |
| FSMD200-16R | 1.5K Reel/Tape |
| FSMD260R | 2.0K Reel/Tape |
| FSMD260-13R~FSMD300R | 1.5K Reel/Tape |

Physical specifications


| | |
|---------------------------|--------------------------------------------------------------|
| Termination pad materials | Pure Tin |
| Soldering characteristics | Meets EIA specification RS 186-9E, ANSI/J-std-002 Category 3 |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

FSMD1210 Series

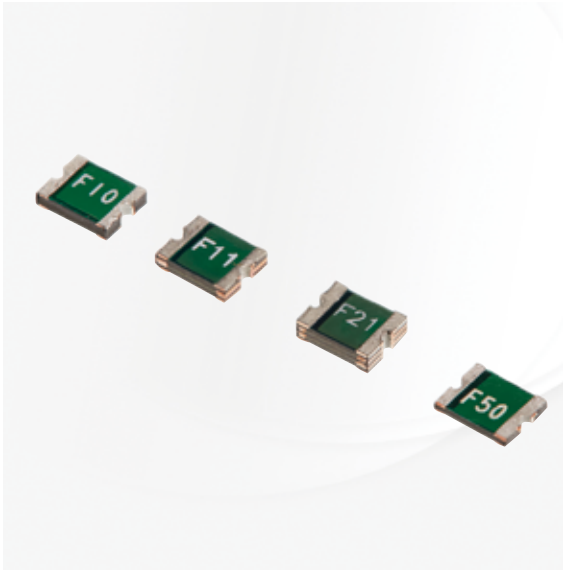

Application

All high-density boards

Product Features

Small surface mount, Solid state Faster time to trip than standard SMD devices Lower resistance than standard SMD devices



Operation Current

0.05A~2.00A

Maximum Voltage

6V~60V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50090556) |



SVHC Compliant

Electrical Characteristics (23°C)


| Part Number | Hold Current | Trip Current | Rated Voltage | Max. Current | Typ. Power | Max. Time to trip | | Resistance | |
|------------------|--------------|--------------|---------------|--------------|------------|-------------------|------|------------------|-------------------|
| | | | | | | Current | Time | R _{MIN} | R _{1MAX} |
| | | | | | | | | Ohms | Ohms |
| FSMD005-1210-R | 0.05 | 0.15 | 60 | 100 | 0.60 | 0.25 | 1.50 | 3.600 | 50.000 |
| FSMD010-1210-R | 0.10 | 0.25 | 60 | 100 | 0.60 | 0.50 | 1.50 | 1.600 | 15.000 |
| FSMD020-1210-R | 0.20 | 0.40 | 30 | 100 | 0.60 | 8.00 | 0.02 | 0.800 | 5.000 |
| FSMD035-1210-R | 0.35 | 0.70 | 16 | 100 | 0.60 | 8.00 | 0.20 | 0.320 | 1.300 |
| FSMD050-1210-R | 0.50 | 1.00 | 16 | 100 | 0.60 | 8.00 | 0.10 | 0.250 | 0.900 |
| FSMD075-1210-R | 0.75 | 1.50 | 8 | 100 | 0.60 | 8.00 | 0.10 | 0.130 | 0.400 |
| FSMD075-24-1210R | 0.75 | 1.50 | 24 | 100 | 0.60 | 8.00 | 0.10 | 0.130 | 0.400 |
| FSMD110-1210R | 1.10 | 2.20 | 8 | 100 | 0.80 | 8.00 | 0.30 | 0.060 | 0.210 |
| FSMD110-16-1210R | 1.10 | 2.20 | 16 | 100 | 0.80 | 8.00 | 0.30 | 0.060 | 0.210 |
| FSMD150-1210R | 1.50 | 3.00 | 6 | 100 | 0.80 | 8.00 | 0.50 | 0.040 | 0.110 |
| FSMD175-1210R | 1.75 | 3.50 | 6 | 100 | 0.80 | 8.00 | 0.60 | 0.020 | 0.080 |
| FSMD200-1210R | 2.00 | 4.00 | 6 | 100 | 0.80 | 8.00 | 1.00 | 0.015 | 0.070 |

Thermal Derating for PPTC Device at Various Ambient Temperatures


| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 145% | 130% | 115% | 100% | 92% | 83% | 76% | 70% | 62% | 50% |

Typical Time-To-Trip at 23°C

- A = FSMD005-1210-R
- B = FSMD010-1210-R
- C = FSMD020-1210-R
- D = FSMD035-1210-R
- E = FSMD050-1210-R
- F = FSMD075-1210-R / 075-24-1210R
- G = FSMD110-1210R / 110-16-1210R
- H = FSMD150-1210R
- I = FSMD175-1210R
- J = FSMD200-1210R

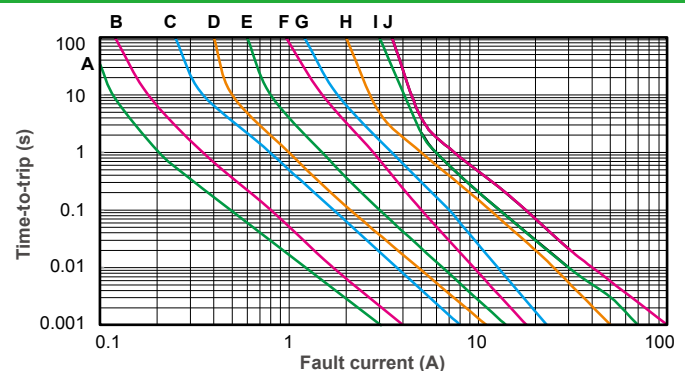


FSMD1210 Product Dimensions (mm)

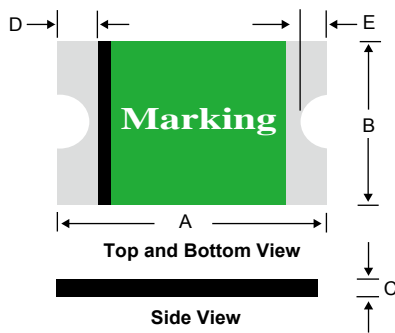



| Part Number | A | | B | | C | | D | | E | |
|------------------|------|------|------|------|------|------|------|------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| FSMD005-1210-R | 3.00 | 3.43 | 2.35 | 2.80 | 0.60 | 1.15 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD010-1210-R | 3.00 | 3.43 | 2.35 | 2.80 | 0.60 | 1.15 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD020-1210-R | 3.00 | 3.43 | 2.35 | 2.80 | 0.40 | 0.85 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD035-1210-R | 3.00 | 3.43 | 2.35 | 2.80 | 0.40 | 0.80 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD050-1210-R | 3.00 | 3.43 | 2.35 | 2.80 | 0.30 | 0.75 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD075-1210-R | 3.00 | 3.43 | 2.35 | 2.80 | 0.30 | 0.70 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD075-24-1210R | 3.00 | 3.43 | 2.35 | 2.80 | 0.80 | 1.20 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD110-1210R | 3.00 | 3.43 | 2.35 | 2.80 | 0.60 | 1.00 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD110-16-1210R | 3.00 | 3.43 | 2.35 | 2.80 | 0.60 | 1.00 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD150-1210R | 3.00 | 3.43 | 2.35 | 2.80 | 0.50 | 0.90 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD175-1210R | 3.00 | 3.43 | 2.35 | 2.80 | 0.80 | 1.40 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD200-1210R | 3.00 | 3.43 | 2.35 | 2.80 | 0.80 | 1.40 | 0.25 | 0.75 | 0.10 | 0.45 |

*For Reflow Soldering Profile information, please refer to P.69 “ IX APPENDIX - SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS ”

Part Numbering System

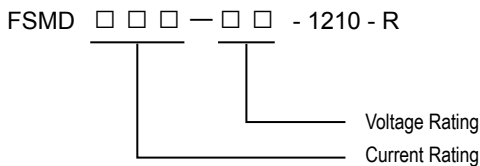

Part Marking System

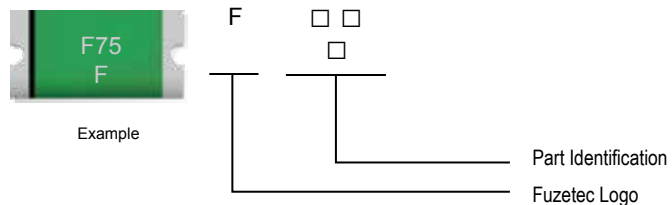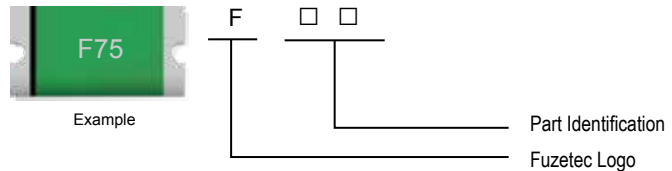

Package Information

| Part Number | Standard Package |
|--------------------------------|------------------|
| FSMD005-1210-R~FSMD020-1210-R | : 3.0K Reel/Tape |
| FSMD035-1210-R~FSMD075-1210-R | : 4.0K Reel/Tape |
| FSMD075-24-1210R~FSMD200-1210R | : 3.0K Reel/Tape |

Physical specifications

| | |
|---------------------------|--------------------------------------------------------------|
| Termination pad materials | Pure Tin |
| Soldering characteristics | Meets EIA specification RS 186-9E, ANSI/J-std-002 Category 3 |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

FSMD1206 Series



Application

All high-density boards

Product Features

Small surface mount, Solid state Faster time to trip than standard SMD devices Lower resistance than standard SMD devices



Operation Current

0.05A~2.00A

Maximum Voltage

6V~60V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50090556) |



Electrical Characteristics (23°C)


| Part Number | Hold Current | Trip Current | Rated Voltage | Max. Current | Typ. Power | Max. Time to trip | | Resistance | |
|-------------------|--------------|--------------|---------------|--------------|------------|--------------------|--------------------|------------------------------------|----------------------|
| | | | | | | Current | Time | R _{MIN} | R _{1MAX} |
| | | | | | | I _H , A | I _T , A | V _{MAX} , V _{DC} | I _{MAX} , A |
| FSMD005-1206-R | 0.05 | 0.15 | 60 | 100 | 0.4 | 0.25 | 1.50 | 3.600 | 50.000 |
| FSMD010-1206-R | 0.10 | 0.25 | 60 | 100 | 0.4 | 0.50 | 1.00 | 1.600 | 15.000 |
| FSMD012-1206-R | 0.12 | 0.39 | 48 | 100 | 0.5 | 1.00 | 0.20 | 1.400 | 6.500 |
| FSMD016-1206-R | 0.16 | 0.45 | 48 | 100 | 0.5 | 1.00 | 0.30 | 1.100 | 5.000 |
| FSMD020-1206-R | 0.20 | 0.40 | 30 | 100 | 0.4 | 8.00 | 0.10 | 0.600 | 2.500 |
| FSMD025-1206-R | 0.25 | 0.50 | 16 | 100 | 0.6 | 8.00 | 0.08 | 0.550 | 2.300 |
| FSMD025-24-1206-R | 0.25 | 0.50 | 24 | 100 | 0.6 | 8.00 | 0.08 | 0.550 | 2.300 |
| FSMD035-1206-R | 0.35 | 0.75 | 16 | 100 | 0.4 | 8.00 | 0.10 | 0.300 | 1.200 |
| FSMD035-30-1206R | 0.35 | 0.75 | 30 | 100 | 0.6 | 8.00 | 0.10 | 0.300 | 1.200 |
| FSMD050-1206-R | 0.50 | 1.00 | 8 | 100 | 0.4 | 8.00 | 0.10 | 0.150 | 0.700 |
| FSMD050-24-1206R | 0.50 | 1.00 | 24 | 100 | 0.6 | 8.00 | 0.10 | 0.150 | 0.750 |
| FSMD075-1206R | 0.75 | 1.50 | 8 | 100 | 0.6 | 8.00 | 0.20 | 0.090 | 0.290 |
| FSMD075-16-1206R | 0.75 | 1.50 | 16 | 100 | 0.6 | 8.00 | 0.20 | 0.090 | 0.290 |
| FSMD100-1206R | 1.00 | 1.80 | 6 | 100 | 0.6 | 8.00 | 0.30 | 0.055 | 0.210 |
| FSMD110-1206R | 1.10 | 2.20 | 8 | 100 | 0.8 | 8.00 | 0.30 | 0.040 | 0.180 |
| FSMD110-16-1206R | 1.10 | 2.20 | 16 | 100 | 0.8 | 8.00 | 0.30 | 0.040 | 0.180 |
| FSMD150-1206R | 1.50 | 3.00 | 8 | 100 | 0.8 | 8.00 | 1.00 | 0.040 | 0.120 |
| FSMD200-1206R | 2.00 | 3.50 | 6 | 100 | 0.8 | 8.00 | 1.50 | 0.018 | 0.080 |

Thermal Derating for PPTC Device at Various Ambient Temperatures


| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 145% | 130% | 115% | 100% | 92% | 84% | 78% | 69% | 62% | 50% |

Typical Time-To-Trip at 23°C

- Z = FSMD005-1206-R G = FSMD050-1206-R
- A = FSMD010-1206-R / FSMD050-24-1206R
- B = FSMD012-1206-R H = FSMD075-1206R
- C = FSMD016-1206-R / FSMD075-16-1206
- D = FSMD020-1206-R I = FSMD100-1206R
- E = FSMD025-1206-R J = FSMD110-1206R
- / 025-24-1206-R / 110-16-1206R
- F = FSMD035-1206-R K = FSMD150-1206R
- / 035-30-1206R L = FSMD200-1206R

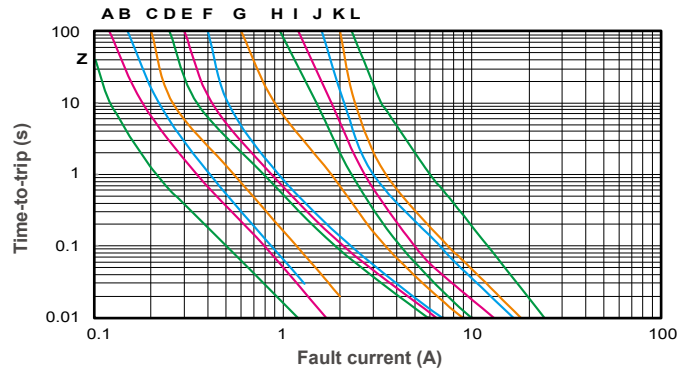


FSMD1206 Product Dimensions (mm)

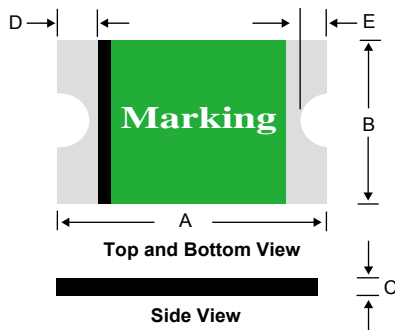


*For Reflow Soldering Profile information, please refer to P.69“ IX APPENDIX - SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS ”

| Part Number | A | | B | | C | | D | | E | |
|-------------------|------|------|------|------|------|------|------|------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| FSMD005-1206-R | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.85 | 0.10 | 0.75 | 0.10 | 0.45 |
| FSMD010-1206-R | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.85 | 0.10 | 0.75 | 0.10 | 0.45 |
| FSMD012-1206-R | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.85 | 0.10 | 0.75 | 0.10 | 0.45 |
| FSMD016-1206-R | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.75 | 0.10 | 0.75 | 0.10 | 0.45 |
| FSMD020-1206-R | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.75 | 0.10 | 0.75 | 0.10 | 0.45 |
| FSMD025-1206-R | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.75 | 0.10 | 0.75 | 0.10 | 0.45 |
| FSMD025-24-1206-R | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 0.75 | 0.10 | 0.75 | 0.10 | 0.45 |
| FSMD035-1206-R | 3.00 | 3.50 | 1.50 | 1.80 | 0.30 | 0.75 | 0.10 | 0.75 | 0.10 | 0.45 |
| FSMD035-30-1206R | 3.00 | 3.50 | 1.50 | 1.80 | 0.90 | 1.30 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD050-1206-R | 3.00 | 3.50 | 1.50 | 1.80 | 0.25 | 0.55 | 0.10 | 0.75 | 0.10 | 0.45 |
| FSMD050-24-1206R | 3.00 | 3.50 | 1.50 | 1.80 | 0.80 | 1.20 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD075-1206R | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 1.25 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD075-16-1206R | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 1.25 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD100-1206R | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 1.00 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD110-1206R | 3.00 | 3.50 | 1.50 | 1.80 | 0.45 | 1.00 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD110-16-1206R | 3.00 | 3.50 | 1.50 | 1.80 | 0.80 | 1.40 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD150-1206R | 3.00 | 3.50 | 1.50 | 1.80 | 0.80 | 1.40 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD200-1206R | 3.00 | 3.50 | 1.50 | 1.80 | 0.85 | 1.60 | 0.25 | 0.75 | 0.10 | 0.45 |

Part Numbering System

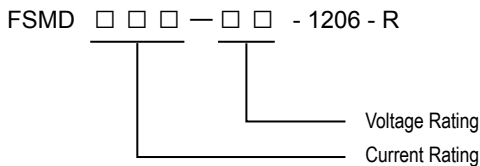

Part Marking System



- Example
- FZ = FSMD005-1206-R
 - FA = FSMD010-1206-R
 - FJ = FSMD012-1206-R
 - FK = FSMD016-1206-R
 - FB = FSMD020-1206-R
 - FL = FSMD025-1206-R
 - FP = FSMD025-24-1206-R
 - FC = FSMD035-1206-R
 - FM = FSMD035-30-1206R
 - FD = FSMD050-1206-R
 - FN = FSMD050-24-1206R
 - FE = FSMD075-1206R
 - FO = FSMD075-16-1206R
 - FF = FSMD100-1206R
 - FG = FSMD110-1206R
 - FQ = FSMD110-16-1206R
 - FH = FSMD150-1206R
 - FI = FSMD200-1206R

Package Information

| Part Number | Standard Package |
|-----------------------------------|------------------|
| FSMD005-1206-R~ FSMD025-24-1206-R | : 3.0K Reel/Tape |
| FSMD035-1206-R | : 4.0K Reel/Tape |
| FSMD035-30-1206R | : 3.0K Reel/Tape |
| FSMD050-1206-R | : 4.0K Reel/Tape |
| FSMD050-24-1206R~FSMD110-1206R | : 3.0K Reel/Tape |
| FSMD110-16-1206R~FSMD200-1206R | : 2.0K Reel/Tape |

Physical specifications

| | |
|---------------------------|--------------------------------------------------------------|
| Termination pad materials | Pure Tin |
| Soldering characteristics | Meets EIA specification RS 186-9E, ANSI/J-std-002 Category 3 |


Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

NOTE : All Specifications subject to change without notice.

FSMD0805 Series

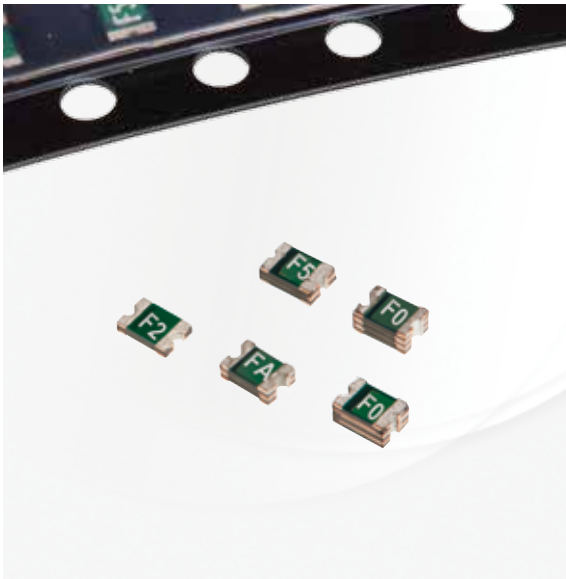

Application

All high-density boards

Product Features

Small surface mountable, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices



Operation Current

0.10A~1.10A

Maximum Voltage

6V~24V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50090556) |



SVHC Compliant

Electrical Characteristics (23°C)


| Part Number | Hold Current | Trip Current | Rated Voltage | Max. Current | Typ. Power | Max. Time to trip | | Resistance | |
|-------------------|--------------|--------------|---------------|--------------|------------|-------------------|------|------------------|-------------------|
| | | | | | | Current | Time | R _{MIN} | R _{1MAX} |
| | | | | | | A | Sec | Ohms | Ohms |
| FSMD010-0805-R | 0.10 | 0.30 | 15 | 100 | 0.5 | 0.50 | 1.50 | 0.700 | 6.000 |
| FSMD010-24-0805-R | 0.10 | 0.30 | 24 | 100 | 0.5 | 0.50 | 1.50 | 0.700 | 6.000 |
| FSMD020-0805-R | 0.20 | 0.50 | 9 | 100 | 0.5 | 8.00 | 0.02 | 0.400 | 3.500 |
| FSMD035-0805-R | 0.35 | 0.75 | 6 | 100 | 0.5 | 8.00 | 0.10 | 0.250 | 1.200 |
| FSMD050-0805R | 0.50 | 1.00 | 6 | 100 | 0.5 | 8.00 | 0.10 | 0.150 | 0.850 |
| FSMD050-9-0805R | 0.50 | 1.00 | 9 | 100 | 0.5 | 8.00 | 0.10 | 0.150 | 0.850 |
| FSMD075-0805R | 0.75 | 1.50 | 6 | 100 | 0.6 | 8.00 | 0.20 | 0.090 | 0.350 |
| FSMD100-0805R | 1.00 | 1.95 | 6 | 100 | 0.6 | 8.00 | 0.30 | 0.060 | 0.210 |
| FSMD110-0805R | 1.10 | 2.20 | 6 | 100 | 0.6 | 8.00 | 0.20 | 0.050 | 0.200 |

Thermal Derating for PPTC Device at Various Ambient Temperatures


| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 145% | 130% | 116% | 100% | 91% | 84% | 76% | 69% | 61% | 50% |

Typical Time-To-Trip at 23°C

- A = FSMD010-0805-R / FSMD010-24-0805-R
- B = FSMD020-0805-R
- C = FSMD035-0805-R
- D = FSMD050-0805R / FSMD050-9-0805R
- E = FSMD075-0805R
- F = FSMD100-0805R
- G = FSMD110-0805R

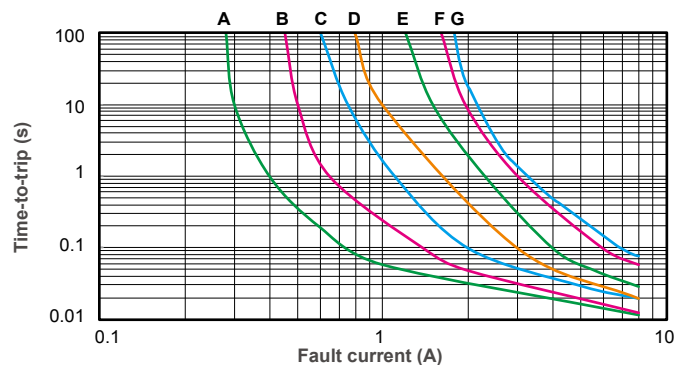


FSMD0805 Product Dimensions (mm)

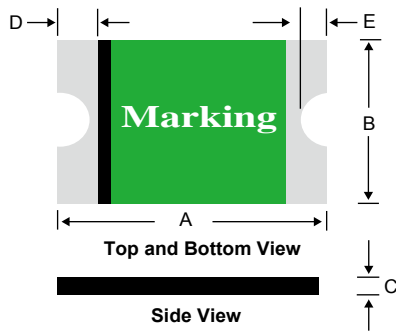


| Part Number | A | | B | | C | | D | | E | |
|-------------------|------|------|------|------|------|------|------|------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| FSMD010-0805-R | 2.00 | 2.30 | 1.20 | 1.50 | 0.30 | 1.00 | 0.20 | 0.60 | 0.10 | 0.45 |
| FSMD010-24-0805-R | 2.00 | 2.30 | 1.20 | 1.50 | 0.30 | 1.00 | 0.20 | 0.60 | 0.10 | 0.45 |
| FSMD020-0805-R | 2.00 | 2.30 | 1.20 | 1.50 | 0.30 | 1.00 | 0.20 | 0.60 | 0.10 | 0.45 |
| FSMD035-0805-R | 2.00 | 2.30 | 1.20 | 1.50 | 0.25 | 0.75 | 0.20 | 0.60 | 0.10 | 0.45 |
| FSMD050-0805R | 2.00 | 2.30 | 1.20 | 1.50 | 0.55 | 1.25 | 0.20 | 0.60 | 0.10 | 0.45 |
| FSMD050-9-0805R | 2.00 | 2.30 | 1.20 | 1.50 | 0.55 | 1.25 | 0.20 | 0.60 | 0.10 | 0.45 |
| FSMD075-0805R | 2.00 | 2.30 | 1.20 | 1.50 | 0.55 | 1.25 | 0.20 | 0.60 | 0.10 | 0.45 |
| FSMD100-0805R | 2.00 | 2.30 | 1.20 | 1.50 | 0.75 | 1.80 | 0.20 | 0.60 | 0.10 | 0.45 |
| FSMD110-0805R | 2.00 | 2.30 | 1.20 | 1.50 | 0.75 | 1.80 | 0.20 | 0.60 | 0.10 | 0.45 |

*For Reflow Soldering Profile information, please refer to P.69 "IX APPENDIX - SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS"

Part Numbering System

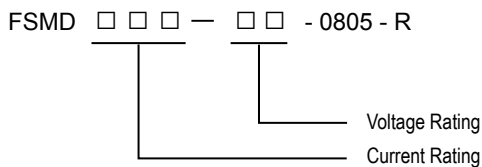

Part Marking System

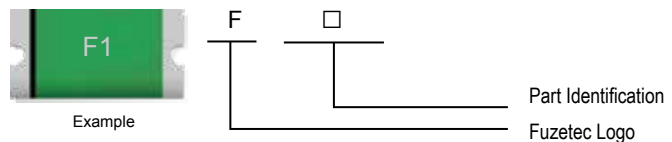

| | |
|------------------------|----------------------|
| F1 = FSMD010-0805-R | F5 = FSMD050-0805R |
| FB = FSMD010-24-0805-R | FA = FSMD050-9-0805R |
| F2 = FSMD020-0805-R | F7 = FSMD075-0805R |
| F3 = FSMD035-0805-R | F0 = FSMD100-0805R |
| | FC = FSMD110-0805R |

Package Information

| Part Number | Standard Package |
|-------------------------------|------------------|
| FSMD010-0805-R-FSMD035-0805-R | : 4.0K Reel/Tape |
| FSMD050-0805R-FSMD110-0805R | : 3.0K Reel/Tape |

Physical specifications


| | |
|---------------------------|--------------------------------------------------------------|
| Termination pad materials | Pure Tin |
| Soldering characteristics | Meets EIA specification RS 186-9E, ANSI/J-std-002 Category 3 |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.

FSMD0603 Series

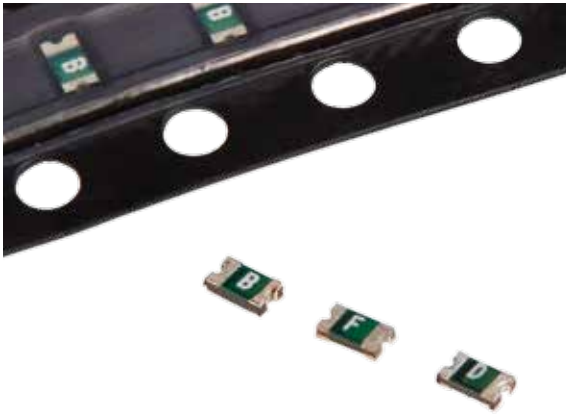

Application

All high-density boards

Product Features

Small surface mountable, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices



Operation Current

0.01A~0.25A

Maximum Voltage

9V~60V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50090556) |



Electrical Characteristics (23°C)


| Part Number | Hold Current | Trip Current | Rated Voltage | Max. Current | Typ. Power | Max. Time to trip | | Resistance | | | | | | |
|----------------|--------------|--------------|---------------|--------------|------------|--------------------|--------------------|------------------------------------|----------------------|--------------------|---------|------|------------------|-------------------|
| | | | | | | I _H , A | I _T , A | V _{MAX} , V _{DC} | I _{MAX} , A | P _d , W | Current | Time | R _{MIN} | R _{1MAX} |
| | | | | | | | | | | | A | Sec | Ohms | Ohms |
| FSMD001-0603-R | 0.01 | 0.03 | 60 | 40 | 0.5 | 0.20 | 1.00 | 15.00 | 100.00 | | | | | |
| FSMD002-0603-R | 0.02 | 0.06 | 60 | 40 | 0.5 | 0.20 | 1.00 | 12.00 | 70.00 | | | | | |
| FSMD003-0603-R | 0.03 | 0.09 | 30 | 40 | 0.5 | 0.20 | 1.00 | 6.00 | 50.00 | | | | | |
| FSMD004-0603-R | 0.04 | 0.12 | 24 | 40 | 0.5 | 0.20 | 1.00 | 4.00 | 40.00 | | | | | |
| FSMD005-0603-R | 0.05 | 0.15 | 15 | 40 | 0.5 | 0.50 | 0.10 | 3.80 | 30.00 | | | | | |
| FSMD008-0603-R | 0.08 | 0.20 | 15 | 40 | 0.5 | 0.60 | 0.10 | 2.80 | 14.00 | | | | | |
| FSMD010-0603-R | 0.10 | 0.25 | 15 | 40 | 0.5 | 0.70 | 0.10 | 0.90 | 8.00 | | | | | |
| FSMD012-0603-R | 0.12 | 0.30 | 9 | 40 | 0.5 | 0.80 | 0.10 | 1.10 | 5.80 | | | | | |
| FSMD016-0603-R | 0.16 | 0.40 | 9 | 40 | 0.5 | 1.00 | 0.10 | 1.00 | 4.20 | | | | | |
| FSMD020-0603-R | 0.20 | 0.45 | 9 | 40 | 0.5 | 2.00 | 0.10 | 0.55 | 3.50 | | | | | |
| FSMD025-0603-R | 0.25 | 0.55 | 9 | 40 | 0.5 | 8.00 | 0.08 | 0.50 | 3.00 | | | | | |

Thermal Derating for PPTC Device at Various Ambient Temperatures

| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 157% | 137% | 118% | 100% | 89% | 80% | 70% | 60% | 51% | 37% |

Typical Time-To-Trip at 23°C

- A = FSMD001-0603-R
- B = FSMD002-0603-R
- C = FSMD003-0603-R
- D = FSMD004-0603-R
- E = FSMD005-0603-R
- F = FSMD008-0603-R
- G = FSMD010-0603-R
- H = FSMD012-0603-R
- I = FSMD016-0603-R
- J = FSMD020-0603-R
- K = FSMD025-0603-R

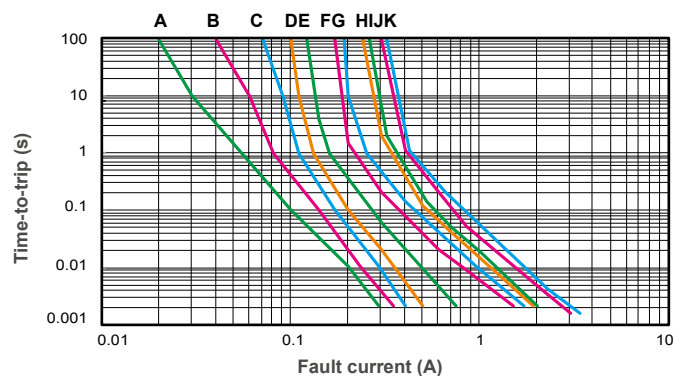

STRAP Series



Application

Rechargeable battery packs, Lithium cell and battery packs

Product Features

Low profile, Solid state



Operation Current

FLR Series 1.90A~9.00A ; FSR Series 1.20A~4.20A

Maximum Voltage

15V ~ 30V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50004084) |



SVHC Compliant

Electrical Characteristics (23°C)

| Part Number | Hold Current | Trip Current | Max. Time to trip | Rated Voltage | Max. Current | Typ. Power | Resistance | | |
|-------------|--------------|--------------|-------------------|---------------|--------------|------------|--------------------|--------------------|-------------------------|
| | | | | | | | R _{MIN} | R _{MAX} | R _{1MAX} |
| | | | | | | | I _H , A | I _T , A | at 5xI _H , S |
| FSR120F | 1.20 | 2.70 | 5.0 | 15 | 100 | 1.2 | 0.085 | 0.160 | 0.220 |
| FSR175F | 1.75 | 3.80 | 5.0 | 15 | 100 | 1.5 | 0.050 | 0.090 | 0.120 |
| FSR200F | 2.00 | 4.40 | 4.0 | 30 | 100 | 1.9 | 0.030 | 0.060 | 0.100 |
| FSR350F | 3.50 | 6.30 | 3.0 | 30 | 100 | 2.5 | 0.017 | 0.031 | 0.050 |
| FSR420F | 4.20 | 7.60 | 6.0 | 30 | 100 | 2.9 | 0.012 | 0.024 | 0.040 |
| FLR190F | 1.90 | 3.90 | 5.0 | 15 | 100 | 1.2 | 0.039 | 0.072 | 0.102 |
| FLR260F | 2.60 | 5.80 | 5.0 | 15 | 100 | 2.5 | 0.020 | 0.042 | 0.063 |
| FLR380F | 3.80 | 8.30 | 5.0 | 15 | 100 | 2.5 | 0.013 | 0.026 | 0.037 |
| FLR450F | 4.50 | 8.90 | 5.0 | 20 | 100 | 2.5 | 0.011 | 0.020 | 0.028 |
| FLR550F | 5.50 | 10.50 | 5.0 | 20 | 100 | 2.8 | 0.009 | 0.016 | 0.022 |
| FLR600F | 6.00 | 11.70 | 5.0 | 20 | 100 | 2.8 | 0.007 | 0.014 | 0.019 |
| FLR730F | 7.30 | 14.10 | 5.0 | 20 | 100 | 3.3 | 0.006 | 0.012 | 0.015 |
| FLR900F | 9.00 | 16.70 | 5.0 | 20 | 100 | 3.8 | 0.006 | 0.010 | 0.014 |


Thermal Derating for PPTC Device at Various Ambient Temperatures

| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| FSR Series | 152% | 135% | 118% | 100% | 90% | 82% | 74% | 65% | 56% | 42% |
| FLR Series | 147% | 132% | 117% | 100% | 94% | 86% | 80% | 71% | 61% | 52% |

Typical Time-To-Trip at 23°C


FSR Series

- A = FSR120F
- B = FSR175F
- C = FSR200F
- D = FSR350F
- E = FSR420F

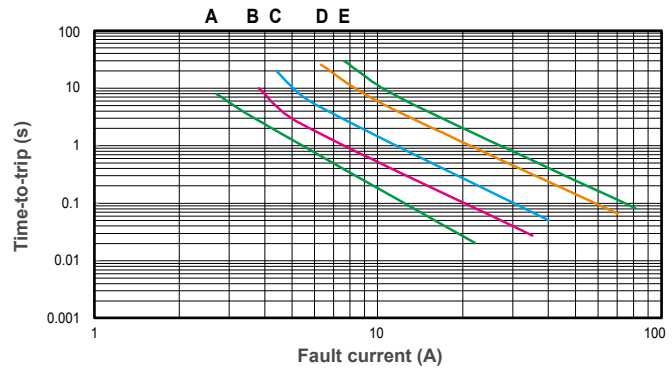


FLR Series

- A = FLR190F
- B = FLR260F
- C = FLR380F
- D = FLR450F
- E = FLR550F
- F = FLR600F
- G = FLR730F
- H = FLR900F

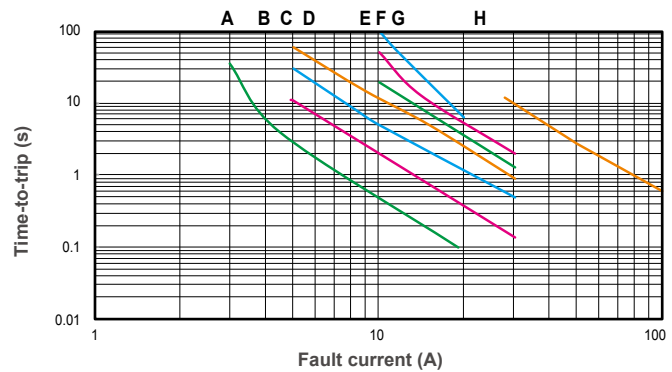

Product Dimensions (mm)

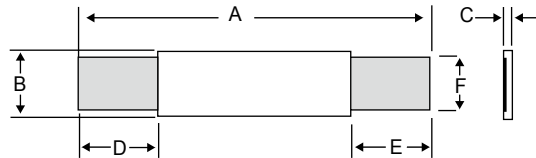

Top view

| Part Number | A | | B | | C | | D | | E | | F | |
|-------------|------|------|------|------|------|------|------|------|------|------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| FSR120F | 19.9 | 22.1 | 4.9 | 5.2 | 0.6 | 1.0 | 5.5 | 7.5 | 5.5 | 7.5 | 3.9 | 4.1 |
| FSR175F | 20.9 | 23.1 | 4.9 | 5.2 | 0.6 | 1.0 | 4.1 | 5.5 | 4.1 | 5.5 | 3.9 | 4.1 |
| FSR200F | 21.3 | 23.4 | 10.2 | 11.0 | 0.5 | 1.1 | 5.0 | 7.6 | 5.0 | 7.6 | 4.8 | 5.4 |
| FSR350F | 28.4 | 31.8 | 13.0 | 13.5 | 0.5 | 1.1 | 6.3 | 8.9 | 6.3 | 8.9 | 5.9 | 6.1 |
| FSR420F | 30.6 | 32.4 | 12.9 | 13.6 | 0.5 | 1.1 | 5.0 | 7.5 | 5.0 | 7.5 | 5.9 | 6.1 |
| FLR190F | 19.9 | 22.1 | 4.9 | 5.5 | 0.6 | 1.0 | 5.5 | 7.5 | 5.5 | 7.5 | 3.9 | 4.1 |
| FLR260F | 20.9 | 23.1 | 4.9 | 5.5 | 0.6 | 1.0 | 4.1 | 5.5 | 4.1 | 5.5 | 3.9 | 4.1 |
| FLR380F | 24.0 | 26.0 | 6.9 | 7.5 | 0.6 | 1.0 | 4.1 | 5.5 | 4.1 | 5.5 | 4.9 | 5.1 |
| FLR450F | 24.0 | 26.0 | 9.9 | 10.5 | 0.6 | 1.0 | 5.3 | 6.7 | 5.3 | 6.7 | 5.9 | 6.1 |
| FLR550F | 35.0 | 37.0 | 6.9 | 7.5 | 0.6 | 1.0 | 5.3 | 6.7 | 5.3 | 6.7 | 4.9 | 5.1 |
| FLR600F | 24.0 | 26.0 | 13.9 | 14.5 | 0.6 | 1.0 | 4.1 | 5.5 | 4.1 | 5.5 | 5.9 | 6.1 |
| FLR730F | 27.1 | 29.1 | 13.9 | 14.5 | 0.6 | 1.0 | 4.1 | 5.5 | 4.1 | 5.5 | 5.9 | 6.1 |
| FLR900F | 45.4 | 47.6 | 7.9 | 8.5 | 0.6 | 1.3 | 5.2 | 7.9 | 5.2 | 7.9 | 5.9 | 6.1 |

Low Rho FSMD1206 Series



Application

All high-density boards

Product Features

Small surface mountable, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices



Operation Current

0.50A~6.00A

Maximum Voltage

6V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50090556) |



SVHC Compliant

Electrical Characteristics (23°C)


| Part Number | Hold Current | Trip Current | Rated Voltage | Max. Current | Typ. Power | Max. Time to trip | | Resistance | |
|----------------|--------------|--------------|---------------|--------------|------------|-------------------|------|------------------|-------------------|
| | | | | | | Current | Time | R _{MIN} | R _{1MAX} |
| | | | | | | A | Sec | Ohms | Ohms |
| FSMD050-1206RZ | 0.50 | 1.50 | 6 | 100 | 0.8 | 8.0 | 0.20 | 0.025 | 0.200 |
| FSMD075-1206RZ | 0.75 | 1.80 | 6 | 100 | 0.8 | 8.0 | 0.30 | 0.018 | 0.180 |
| FSMD110-1206RZ | 1.10 | 2.20 | 6 | 100 | 0.8 | 8.0 | 0.30 | 0.015 | 0.100 |
| FSMD150-1206RZ | 1.50 | 3.00 | 6 | 100 | 0.8 | 8.0 | 0.30 | 0.010 | 0.065 |
| FSMD175-1206RZ | 1.75 | 3.50 | 6 | 100 | 0.8 | 8.0 | 0.40 | 0.005 | 0.030 |
| FSMD200-1206RZ | 2.00 | 4.00 | 6 | 100 | 0.8 | 8.0 | 0.50 | 0.005 | 0.025 |
| FSMD260-1206RZ | 2.60 | 5.20 | 6 | 100 | 0.8 | 8.0 | 4.00 | 0.003 | 0.025 |
| FSMD300-1206RZ | 3.00 | 6.00 | 6 | 100 | 0.8 | 8.0 | 4.00 | 0.003 | 0.020 |
| FSMD350-1206RZ | 3.50 | 7.00 | 6 | 100 | 0.8 | 8.0 | 5.00 | 0.003 | 0.018 |
| FSMD380-1206RZ | 3.80 | 8.00 | 6 | 100 | 0.8 | 8.0 | 5.00 | 0.002 | 0.014 |
| FSMD400-1206RZ | 4.00 | 8.00 | 6 | 100 | 0.8 | 8.0 | 5.00 | 0.002 | 0.014 |
| FSMD450-1206RZ | 4.50 | 9.00 | 6 | 100 | 0.8 | 22.5 | 2.00 | 0.001 | 0.014 |
| FSMD500-1206RZ | 5.00 | 10.00 | 6 | 100 | 0.8 | 25.0 | 5.00 | 0.001 | 0.012 |
| FSMD600-1206RZ | 6.00 | 12.00 | 6 | 100 | 1.0 | 30.0 | 2.00 | 0.001 | 0.010 |

Thermal Derating for PPTC Device at Various Ambient Temperatures


| TEMPERATURE | -40°C | -20 | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|------|------|------|------|------|------|------|------|------|
| DERATING % | 145% | 130% | 115% | 100% | 92% | 84% | 77% | 69% | 61% | 50% |

Typical Time-To-Trip at 23°C

- A = FSMD050-1206RZ H = FSMD300-1206RZ
- B = FSMD075-1206RZ I = FSMD350-1206RZ
- C = FSMD110-1206RZ J = FSMD380-1206RZ
- D = FSMD150-1206RZ K = FSMD400-1206RZ
- E = FSMD175-1206RZ L = FSMD450-1206RZ
- F = FSMD200-1206RZ M = FSMD500-1206RZ
- G = FSMD260-1206RZ N = FSMD600-1206RZ

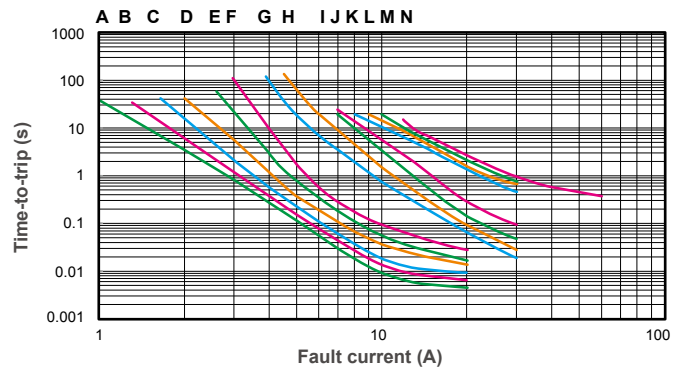


Low Rho FSMD1206 Product Dimensions (mm)

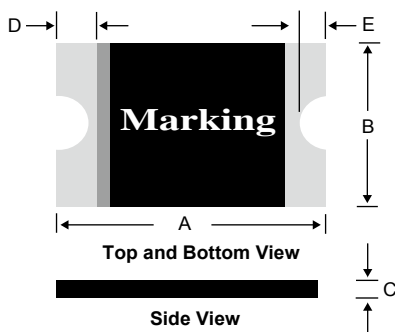


*For Reflow Soldering Profile information, please refer to P.69 "IX APPENDIX - SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS"

| Part Number | A | | B | | C | | D | | E | |
|----------------|------|------|------|------|------|------|------|------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| FSMD050-1206RZ | 3.00 | 3.50 | 1.50 | 1.80 | 0.30 | 0.70 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD075-1206RZ | 3.00 | 3.50 | 1.50 | 1.80 | 0.30 | 0.70 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD110-1206RZ | 3.00 | 3.50 | 1.50 | 1.80 | 0.30 | 0.70 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD150-1206RZ | 3.00 | 3.50 | 1.50 | 1.80 | 0.30 | 0.70 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD175-1206RZ | 3.00 | 3.50 | 1.50 | 1.80 | 0.30 | 0.70 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD200-1206RZ | 3.00 | 3.50 | 1.50 | 1.80 | 0.30 | 0.70 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD260-1206RZ | 3.00 | 3.50 | 1.50 | 1.80 | 0.30 | 1.00 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD300-1206RZ | 3.00 | 3.50 | 1.50 | 1.80 | 0.30 | 1.00 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD350-1206RZ | 3.00 | 3.50 | 1.50 | 1.80 | 0.60 | 1.00 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD380-1206RZ | 3.00 | 3.50 | 1.50 | 1.80 | 0.60 | 1.00 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD400-1206RZ | 3.00 | 3.50 | 1.50 | 1.80 | 0.60 | 1.00 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD450-1206RZ | 3.00 | 3.50 | 1.50 | 1.80 | 0.60 | 1.00 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD500-1206RZ | 3.00 | 3.50 | 1.50 | 1.80 | 0.60 | 1.00 | 0.25 | 0.75 | 0.10 | 0.45 |
| FSMD600-1206RZ | 3.00 | 3.50 | 1.50 | 1.80 | 0.60 | 1.00 | 0.25 | 0.75 | 0.10 | 0.45 |

Part Numbering System

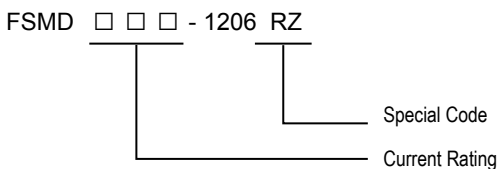

Part Marking System

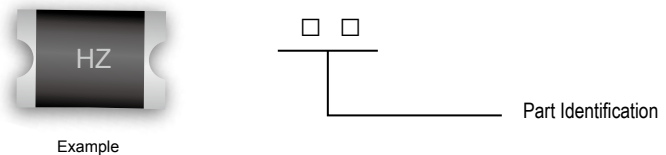

- | | |
|---------------------|---------------------|
| EZ = FSMD050-1206RZ | SZ = FSMD300-1206RZ |
| FZ = FSMD075-1206RZ | VZ = FSMD350-1206RZ |
| HZ = FSMD110-1206RZ | WZ = FSMD380-1206RZ |
| JZ = FSMD150-1206RZ | XZ = FSMD400-1206RZ |
| KZ = FSMD175-1206RZ | YZ = FSMD450-1206RZ |
| MZ = FSMD200-1206RZ | ZZ = FSMD500-1206RZ |
| QZ = FSMD260-1206RZ | BZ = FSMD600-1206RZ |

Package Information

| Part Number | Standard Package |
|--------------------------------|------------------|
| FSMD050-1206RZ~ FSMD200-1206RZ | : 4.0K Reel/Tape |
| FSMD260-1206RZ~ FSMD600-1206RZ | : 3.0K Reel/Tape |

Physical specifications

| | |
|---------------------------|--------------------------------------------------------------|
| Termination pad materials | Pure Tin |
| Soldering characteristics | Meets EIA specification RS 186-9E, ANSI/J-std-002 Category 3 |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.
- Avoid PPTC devices being exposed to prolonged high temperature and/or high humidity storage environment such as 85°C and/or 85RH% which could diminish PPTC's performance.

NOTE : All Specifications subject to change without notice.

Low Rho FSMD0805 Series



Application

All high-density boards

Product Features

Small surface mountable, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices



Operation Current

0.75A~3.50A

Maximum Voltage

6V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50090556) |



SVHC Compliant

Electrical Characteristics (23°C)


| Part Number | Hold Current | Trip Current | Rated Voltage | Max. Current | Typ. Power | Max. Time to trip | | Resistance | |
|----------------|--------------|--------------|---------------|--------------|------------|-------------------|------|------------------|-------------------|
| | | | | | | Current | Time | R _{MIN} | R _{1MAX} |
| | | | | | | A | Sec | Ohms | Ohms |
| FSMD075-0805RZ | 0.75 | 1.50 | 6 | 100 | 0.6 | 8.0 | 0.20 | 0.040 | 0.160 |
| FSMD110-0805RZ | 1.10 | 1.80 | 6 | 100 | 0.6 | 8.0 | 0.30 | 0.030 | 0.130 |
| FSMD125-0805RZ | 1.25 | 2.50 | 6 | 100 | 0.6 | 8.0 | 0.30 | 0.025 | 0.110 |
| FSMD150-0805RZ | 1.50 | 3.00 | 6 | 100 | 0.6 | 8.0 | 0.30 | 0.015 | 0.065 |
| FSMD175-0805RZ | 1.75 | 3.50 | 6 | 100 | 0.6 | 8.0 | 0.60 | 0.005 | 0.055 |
| FSMD200-0805RZ | 2.00 | 4.00 | 6 | 100 | 0.6 | 8.0 | 1.00 | 0.005 | 0.045 |
| FSMD300-0805RZ | 3.00 | 7.00 | 6 | 100 | 0.6 | 8.0 | 5.00 | 0.003 | 0.030 |
| FSMD350-0805RZ | 3.50 | 7.00 | 6 | 100 | 0.6 | 8.0 | 5.00 | 0.002 | 0.025 |

Thermal Derating for PPTC Device at Various Ambient Temperatures


| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 145% | 130% | 115% | 100% | 92% | 84% | 77% | 69% | 61% | 50% |

Typical Time-To-Trip at 23°C

- A = FSMD075-0805RZ
- B = FSMD110-0805RZ
- C = FSMD125-0805RZ
- D = FSMD150-0805RZ
- E = FSMD175-0805RZ
- F = FSMD200-0805RZ
- G = FSMD300-0805RZ
- H = FSMD350-0805RZ

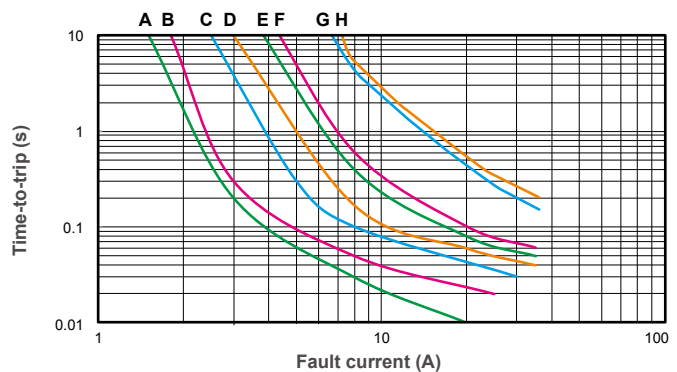


Low Rho FSMD0805 Product Dimensions (mm)

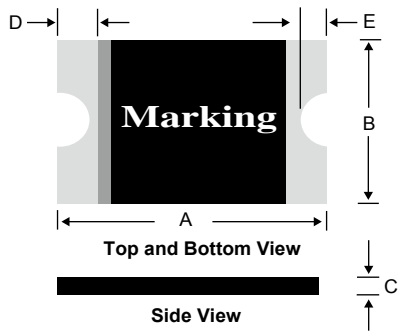

| Part Number | A | | B | | C | | D | | E | |
|----------------|------|------|------|------|------|------|------|------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| FSMD075-0805RZ | 2.00 | 2.20 | 1.20 | 1.50 | 0.30 | 0.70 | 0.20 | 0.60 | 0.10 | 0.45 |
| FSMD110-0805RZ | 2.00 | 2.20 | 1.20 | 1.50 | 0.30 | 0.70 | 0.20 | 0.60 | 0.10 | 0.45 |
| FSMD125-0805RZ | 2.00 | 2.20 | 1.20 | 1.50 | 0.30 | 0.70 | 0.20 | 0.60 | 0.10 | 0.45 |
| FSMD150-0805RZ | 2.00 | 2.20 | 1.20 | 1.50 | 0.30 | 0.70 | 0.20 | 0.60 | 0.10 | 0.45 |
| FSMD175-0805RZ | 2.00 | 2.20 | 1.20 | 1.50 | 0.30 | 0.70 | 0.20 | 0.60 | 0.10 | 0.45 |
| FSMD200-0805RZ | 2.00 | 2.20 | 1.20 | 1.50 | 0.30 | 1.00 | 0.20 | 0.60 | 0.10 | 0.45 |
| FSMD300-0805RZ | 2.00 | 2.20 | 1.20 | 1.50 | 0.60 | 1.40 | 0.20 | 0.60 | 0.10 | 0.45 |
| FSMD350-0805RZ | 2.00 | 2.20 | 1.20 | 1.50 | 0.60 | 1.40 | 0.20 | 0.60 | 0.10 | 0.45 |

*For Reflow Soldering Profile information, please refer to P.69 “ IX APPENDIX - SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS ”


Part Numbering System

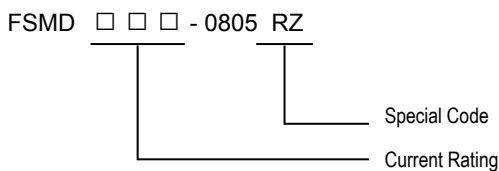

Part Marking System



Example



F = FSMD075-0805RZ
 H = FSMD110-0805RZ
 I = FSMD125-0805RZ
 J = FSMD150-0805RZ

K = FSMD175-0805RZ
 M = FSMD200-0805RZ
 S = FSMD300-0805RZ
 V = FSMD350-0805RZ

Package Information

| Part Number | Standard Package |
|--------------------------------|------------------|
| FSMD075-0805RZ~ FSMD200-0805RZ | : 4.0K Reel/Tape |
| FSMD300-0805RZ~ FSMD350-0805RZ | : 3.0K Reel/Tape |

Physical specifications

| | |
|---------------------------|--------------------------------------------------------------|
| Termination pad materials | Pure Tin |
| Soldering characteristics | Meets EIA specification RS 186-9E, ANSI/J-std-002 Category 3 |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.
- Avoid PPTC devices being exposed to prolonged high temperature and/or high humidity storage environment such as 85°C and/or 85RH% which could diminish PPTC's performance.

Low Rho FSMD0603 Series



Application

All high-density boards

Product Features

Small surface mountable, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices



Operation Current

0.25A~1.00A

Maximum Voltage

6V~9V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50090556) |



SVHC Compliant

Electrical Characteristics (23°C)


| Part Number | Hold Current | Trip Current | Rated Voltage | Max. Current | Typ. Power | Max. Time to trip | | Resistance | |
|----------------|--------------|--------------|---------------|--------------|------------|-------------------|------|------------------|-------------------|
| | | | | | | Current | Time | R _{MIN} | R _{1MAX} |
| | | | | | | A | Sec | Ohms | Ohms |
| FSMD025-0603RZ | 0.25 | 0.55 | 9 | 100 | 0.5 | 8.0 | 0.08 | 0.500 | 3.000 |
| FSMD035-0603RZ | 0.35 | 0.75 | 6 | 100 | 0.5 | 8.0 | 0.10 | 0.200 | 1.000 |
| FSMD050-0603RZ | 0.50 | 1.00 | 6 | 100 | 0.6 | 8.0 | 0.10 | 0.070 | 0.350 |
| FSMD075-0603RZ | 0.75 | 1.50 | 6 | 100 | 0.6 | 8.0 | 0.20 | 0.050 | 0.250 |
| FSMD100-0603RZ | 1.00 | 1.80 | 6 | 100 | 0.6 | 8.0 | 0.30 | 0.040 | 0.120 |

Thermal Derating for PPTC Device at Various Ambient Temperatures


| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 145% | 130% | 115% | 100% | 92% | 84% | 77% | 69% | 61% | 50% |

Typical Time-To-Trip at 23°C

- A = FSMD025-0603RZ
- B = FSMD035-0603RZ
- C = FSMD050-0603RZ
- D = FSMD075-0603RZ
- E = FSMD100-0603RZ

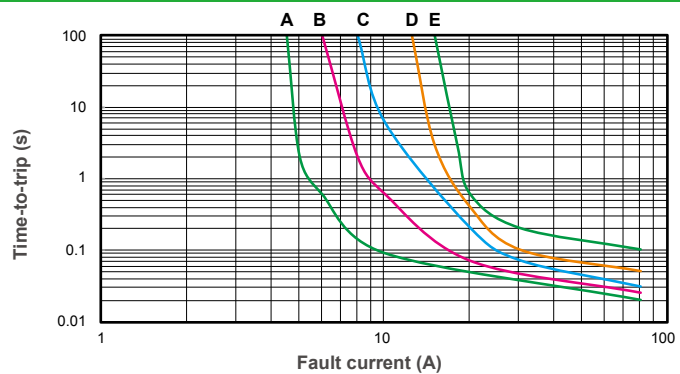


Low Rho FSMD0603 Product Dimensions (mm)

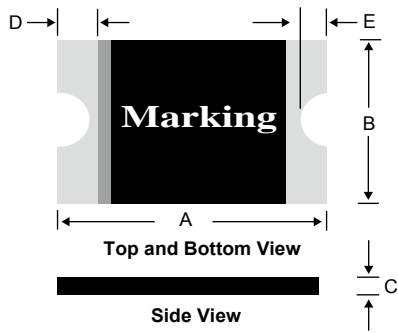


| Part Number | A | | B | | C | | D | | E | |
|----------------|------|------|------|------|------|------|------|------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| FSMD025-0603RZ | 1.40 | 1.80 | 0.45 | 1.00 | 0.30 | 0.70 | 0.10 | 0.50 | 0.08 | 0.40 |
| FSMD035-0603RZ | 1.40 | 1.80 | 0.45 | 1.00 | 0.30 | 0.70 | 0.10 | 0.50 | 0.08 | 0.40 |
| FSMD050-0603RZ | 1.40 | 1.80 | 0.45 | 1.00 | 0.30 | 0.70 | 0.10 | 0.50 | 0.08 | 0.40 |
| FSMD075-0603RZ | 1.40 | 1.80 | 0.45 | 1.00 | 0.30 | 0.70 | 0.10 | 0.50 | 0.08 | 0.40 |
| FSMD100-0603RZ | 1.40 | 1.80 | 0.45 | 1.00 | 0.30 | 0.70 | 0.10 | 0.50 | 0.08 | 0.40 |

*For Reflow Soldering Profile information, please refer to P.69“ IX APPENDIX - SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS ”

Part Numbering System

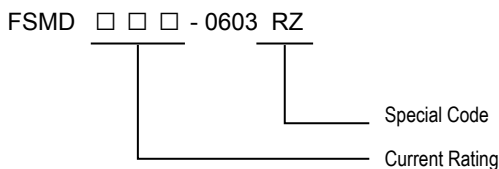

Part Marking System

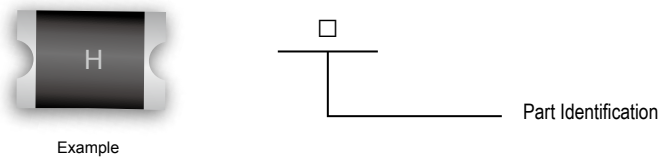

- H = FSMD025-0603RZ
- I = FSMD035-0603RZ
- J = FSMD050-0603RZ
- K = FSMD075-0603RZ
- L = FSMD100-0603RZ

Package Information

| Part Number | Standard Package |
|--------------------------------|------------------|
| FSMD025-0603RZ~ FSMD100-0603RZ | : 4.0K Reel/Tape |

Physical specifications

| | |
|---------------------------|--------------------------------------------------------------|
| Termination pad materials | Pure Tin |
| Soldering characteristics | Meets EIA specification RS 186-9E, ANSI/J-std-002 Category 3 |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.
- Avoid PPTC devices being exposed to prolonged high temperature and/or high humidity storage environment such as 85°C and/or 85RH% which could diminish PPTC's performance.

Low Rho FSMD0402 Series



Application

All high-density boards

Product Features

Small surface mountable, Solid state, Faster time to trip than standard SMD devices, Lower resistance than standard SMD devices



Operation Current

0.10A~0.50A

Maximum Voltage

6V_{DC}



Temperature Range

-40°C to 85°C

Agency Recognition

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
| | UL(E211981) |
| | C-UL(E211981) |
| | TÜV (R50090556) |



SVHC Compliant

Electrical Characteristics (23°C)


| Part Number | Hold Current | Trip Current | Rated Voltage | Max. Current | Typ. Power | Max. Time to trip | | Resistance | |
|----------------|--------------|--------------|---------------|--------------|------------|--------------------|--------------------|------------------------------------|----------------------|
| | | | | | | Current | Time | R _{MIN} | R _{1MAX} |
| | | | | | | I _H , A | I _T , A | V _{MAX} , V _{DC} | I _{MAX} , A |
| FSMD010-0402RZ | 0.10 | 0.30 | 6 | 100 | 0.5 | 0.5 | 1.0 | 0.150 | 2.000 |
| FSMD020-0402RZ | 0.20 | 0.50 | 6 | 100 | 0.5 | 1.0 | 1.0 | 0.100 | 1.250 |
| FSMD035-0402RZ | 0.35 | 0.70 | 6 | 100 | 0.5 | 8.0 | 0.1 | 0.050 | 0.700 |
| FSMD050-0402RZ | 0.50 | 1.00 | 6 | 100 | 0.5 | 8.0 | 0.1 | 0.040 | 0.400 |

Thermal Derating for PPTC Device at Various Ambient Temperatures


| TEMPERATURE | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C |
|-------------|-------|-------|------|------|------|------|------|------|------|------|
| DERATING % | 145% | 130% | 115% | 100% | 92% | 84% | 77% | 69% | 61% | 50% |

Typical Time-To-Trip at 23°C

- A = FSMD010-0402RZ
- B = FSMD020-0402RZ
- C = FSMD035-0402RZ
- D = FSMD050-0402RZ

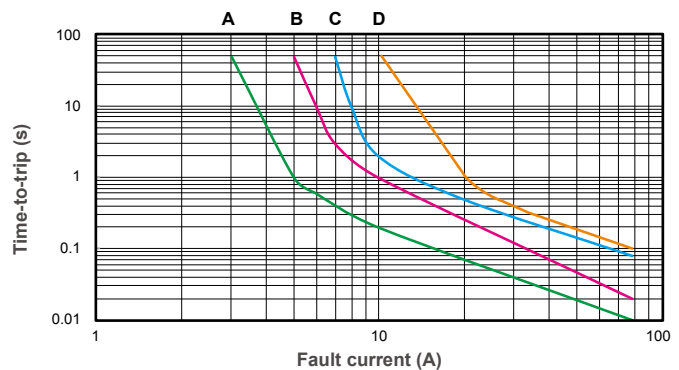


Low Rho FSMD0402 Product Dimensions (mm)

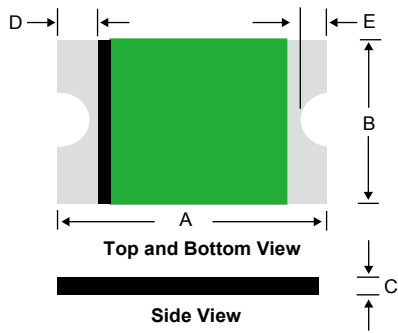

| Part Number | A | | B | | C | | D | | E | |
|----------------|------|------|------|------|------|------|------|------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| FSMD010-0402RZ | 0.85 | 1.15 | 0.35 | 0.65 | 0.30 | 0.60 | 0.10 | 0.45 | 0.05 | 0.40 |
| FSMD020-0402RZ | 0.85 | 1.15 | 0.35 | 0.65 | 0.30 | 0.60 | 0.10 | 0.45 | 0.05 | 0.40 |
| FSMD035-0402RZ | 0.85 | 1.15 | 0.35 | 0.65 | 0.30 | 0.60 | 0.10 | 0.45 | 0.05 | 0.40 |
| FSMD050-0402RZ | 0.85 | 1.15 | 0.35 | 0.65 | 0.30 | 0.60 | 0.10 | 0.45 | 0.05 | 0.40 |

*For Reflow Soldering Profile information, please refer to P.69 “ IX APPENDIX - SMD PRODUCT SOLDER REFLOW RECOMMENDATIONS ”

Part Numbering System

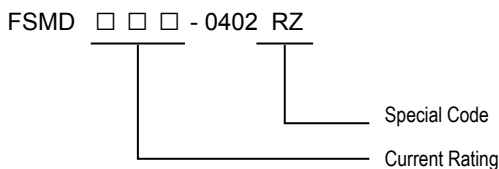

Package Information

| Part Number | Standard Package |
|--------------------------------|------------------|
| FSMD010-0402RZ~ FSMD050-0402RZ | : 10K Reel/Tape |

Physical specifications

| | |
|---------------------------|--------------------------------------------------------------|
| Termination pad materials | Pure Tin |
| Soldering characteristics | Meets EIA specification RS 186-9E, ANSI/J-std-002 Category 3 |

Warning :



- Each product should be carefully evaluated and tested for their suitability of application.
- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- PPTC device are intended for occasional overcurrent protection. Application for repeated overcurrent condition and/or prolonged trip are not anticipated.
- Avoid contact of PPTC device with chemical solvent, including some inert material such as silicone based oil, lubricant and etc. Prolonged contact will damage the device performance.
- Additional protection mechanism are strongly recommended to be used in conjunction with the PPTC device for protection against abnormal or failure conditions.
- Avoid use of PPTC device in a constrained space such as potting material, housing and containers where have limited space to accommodate device thermal expansion and/or contraction.
- Avoid PPTC devices being exposed to prolonged high temperature and/or high humidity storage environment such as 85°C and/or 85RH% which could diminish PPTC's performance.




FUZETEC

Fuzetec Disc, Ring & Custom Shaped PPTC Devices Offers Customized Overcurrent Protections to Tailor Fit Engineer Design Specification and Meet Customer Requirements

Customized
Products



Automotive Customized Products

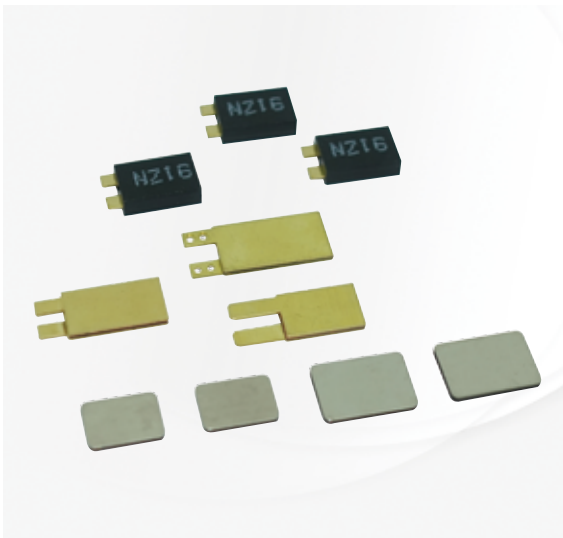

Terminal PPTC FCTS XXXXX

Special terminal PPTC devices are designed for automotive motor applications, protect potential motor stalling overcurrent condition caused by abnormal operation; custom shape and configuration offer better design flexibility.



Application

Automotive motor applications.

Product Features

Custom shaped PPTC devices to fit into motor structure.
Trip-time & resistance adjustable.
Outstanding shock & vibration resistant
Automotive grade high temperature up to 125°C



Operation Current

Trip Current up to 15A/Maximum current capability up to 50A

Operation Voltage

12V~30V_{DC}; High voltage capability up to 60V_{DC}



Temperature Range

-40°C ~ 85°C/125°C


Terminal PPTC w/ Housing FCTS XXXXX-S

Terminal PPTC devices with exterior housing, provide more reliable performance under high temperature environment.

Chip PPTC

Small-sized custom shaped PPTC for small electric motor application.

Battery/Energy Customized

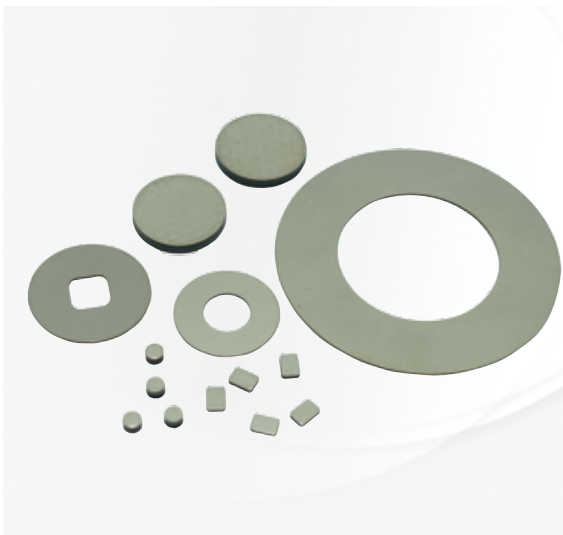

Battery Disc/Ring PPTC FDC XXXXX

Custom designed disc and ring shaped PPTC devices for consumer, vehicle, ship and military battery applications, high current and voltage rating products available.



Application

Battery and Energy Applications

Product Features

High Current / High Voltage capability for the emerging market demand for high power battery and energy solution for connected equipments.



Operation Current

Battery Series
2.00A~8A; high current capability up to 33A for special battery applications

Energy Series

0.16A~2.00A for high voltage AC/DC application

Operation Voltage

Battery Series

3V~16V_{DC}; High voltage capability up to 60V_{DC}

Energy Series

Rated Voltage 240V_{AC/DC}, Max.Int. Voltage 265V_{AC/DC}



Temperature Range

-40°C ~ 85°C/125°C

Energy Chip PPTC Series FCT XXXXX

Base on Fuzetec high voltage PPTC formulation, special design for energy applications with surge immunity requirements, for more information about Energy Chip PPTC series, please contact with Fuzetec.

| Fuzetec | | Tyco (Raychem) | | Bourns | | Littelfuse | | Polytronics | |
|---------|---------|----------------|-----|--------|---------|------------|------|-------------|-------|
| FRX | 005-60F | RXEF | 005 | MF-R | 005 | -- | -- | RLD60P | 005XF |
| FRX | 010-60F | RXEF | 010 | MF-R | 010 | 60R | 010X | RLD60P | 010XF |
| FRX | 017-60F | RXEF | 017 | MF-R | 017 | 60R | 017X | RLD60P | 017XF |
| FRX | 020-60F | -- | -- | MF-R | 020 | 60R | 020X | RLD60P | 020XF |
| FRX | 025-60F | -- | -- | MF-R | 025 | 60R | 025X | RLD60P | 025XF |
| FRX | 030-60F | -- | -- | MF-R | 030 | 60R | 030X | RLD60P | 030XF |
| FRX | 040-60F | -- | -- | MF-R | 040 | 60R | 040X | RLD60P | 040XF |
| FRX | 050-60F | -- | -- | MF-R | 050 | 60R | 050X | RLD60P | 050XF |
| FRX | 065-60F | -- | -- | MF-R | 065 | 60R | 065X | RLD60P | 065XF |
| FRX | 075-60F | -- | -- | MF-R | 075 | 60R | 075X | RLD60P | 075XF |
| FRX | 090-60F | -- | -- | MF-R | 090 | 60R | 090X | RLD60P | 090XF |
| FRX | 110-60F | -- | -- | MF-RX | 110 | 60R | 110X | RLD60P | 110XF |
| FRX | 135-60F | -- | -- | MF-RX | 135 | 60R | 135X | RLD60P | 135XF |
| FRX | 160-60F | -- | -- | MF-RX | 160 | 60R | 160X | RLD60P | 160XF |
| FRX | 185-60F | -- | -- | MF-RX | 185 | 60R | 185X | RLD60P | 185XF |
| FRX | 250-60F | -- | -- | MF-RX | 250 | 60R | 250X | RLD60P | 250XF |
| FRX | 300-60F | -- | -- | MF-RX | 300 | 60R | 300X | RLD60P | 300XF |
| FRX | 375-60F | -- | -- | MF-RX | 375 | 60R | 375X | RLD60P | 375XF |
| FRX | 010-90F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRX | 015-90F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRX | 017-90F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRX | 020-90F | RXEF | 020 | MF-RX | 020/72 | 72R | 020X | RLD72P | 020XF |
| FRX | 025-90F | RXEF | 025 | MF-RX | 025/72 | 72R | 025X | RLD72P | 025XF |
| FRX | 030-90F | RXEF | 030 | MF-RX | 030/72 | 72R | 030X | RLD72P | 030XF |
| FRX | 035-90F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRX | 040-90F | RXEF | 040 | MF-RX | 040/72 | 72R | 040X | RLD72P | 040XF |
| FRX | 050-90F | RXEF | 050 | MF-RX | 050/72 | 72R | 050X | RLD72P | 050XF |
| FRX | 055-90F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRX | 065-90F | RXEF | 065 | MF-RX | 065/72 | 72R | 065X | RLD72P | 065XF |
| FRX | 075-90F | RXEF | 075 | MF-RX | 075/72 | 72R | 075X | RLD72P | 075XF |
| FRX | 090-90F | RXEF | 090 | MF-RX | 090/72 | 72R | 090X | RLD72P | 090XF |
| FRX | 110-90F | RXEF | 110 | MF-RX | 110/72 | 72R | 110X | RLD72P | 110XF |
| FRX | 135-90F | RXEF | 135 | MF-RX | 135/72 | 72R | 135X | RLD72P | 135XF |
| FRX | 160-90F | RXEF | 160 | MF-RX | 160/72 | 72R | 160X | RLD72P | 160XF |
| FRX | 185-90F | RXEF | 185 | MF-RX | 185/72 | 72R | 185X | RLD72P | 185XF |
| FRX | 250-90F | RXEF | 250 | MF-RX | 250/72 | 72R | 250X | RLD72P | 250XF |
| FRX | 300-90F | RXEF | 300 | MF-RX | 300/72 | 72R | 300X | RLD72P | 300XF |
| FRX | 375-90F | RXEF | 375 | MF-RX | 375/72 | 72R | 375X | RLD72P | 375XF |
| FUSB | 075F | RUSBF | 075 | -- | -- | 06R | 075B | RLD06P | 075BF |
| FUSB | 090F | RUSBF | 090 | -- | -- | 16R | 090B | RLD16P | 090BF |
| FUSB | 110F | RUSBF | 110 | -- | -- | 16R | 110B | RLD16P | 110BF |
| FUSB | 120F | RUSBF | 120 | -- | -- | 06R | 120B | RLD06P | 120BF |
| FUSB | 135F | RUSBF | 135 | -- | -- | 16R | 135B | RLD16P | 135BF |
| FUSB | 155F | RUSBF | 155 | -- | -- | 06R | 155B | RLD06P | 155BF |
| FUSB | 160F | RUSBF | 160 | -- | -- | 16R | 160B | RLD16P | 160BF |
| FUSB | 185F | RUSBF | 185 | -- | -- | 16R | 185B | RLD16P | 185BF |
| FUSB | 250F | RUSBF | 250 | -- | -- | 16R | 250B | RLD16P | 250BF |
| FRU | 090-30F | RUEF | 090 | MF-R | 090-0-9 | 30R | 090U | RLD30P | 090UF |
| FRU | 110-30F | RUEF | 110 | MF-R | 110 | 30R | 110U | RLD30P | 110UF |
| FRU | 135-30F | RUEF | 135 | MF-R | 135 | 30R | 135U | RLD30P | 135UF |
| FRU | 160-30F | RUEF | 160 | MF-R | 160 | 30R | 160U | RLD30P | 160UF |
| FRU | 185-30F | RUEF | 185 | MF-R | 185 | 30R | 185U | RLD30P | 185UF |
| FRU | 250-30F | RUEF | 250 | MF-R | 250 | 30R | 250U | RLD30P | 250UF |
| FRU | 300-30F | RUEF | 300 | MF-R | 300 | 30R | 300U | RLD30P | 300UF |
| FRU | 400-30F | RUEF | 400 | MF-R | 400 | 30R | 400U | RLD30P | 400UF |
| FRU | 500-30F | RUEF | 500 | MF-R | 500 | 30R | 500U | RLD30P | 500UF |
| FRU | 600-30F | RUEF | 600 | MF-R | 600 | 30R | 600U | RLD30P | 600UF |
| FRU | 700-30F | RUEF | 700 | MF-R | 700 | 30R | 700U | RLD30P | 700UF |
| FRU | 800-30F | RUEF | 800 | MF-R | 800 | 30R | 800U | RLD30P | 800UF |
| FRU | 900-30F | RUEF | 900 | MF-R | 900 | 30R | 900U | RLD30P | 900UF |

| Fuzetec | | Tyco (Raychem) | | Bourns | | Littelfuse | | Polytronics | |
|---------|-----------|----------------|----------|--------|---------|------------|-------|-------------|--------|
| FRT | 050-33F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRT | 075-33F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRT | 090-33F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRT | 120-33F | RTEF | 120 | -- | -- | -- | -- | -- | -- |
| FRT | 135-33F | RTEF | 135 | -- | -- | -- | -- | -- | -- |
| FRT | 160-33F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRT | 190-33F | RTEF | 190 | -- | -- | -- | -- | -- | -- |
| FRT | 220-33F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRT | 250-33F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRG | 250-16F | RGEF | 250 | -- | -- | 16R | 250G | RLD16P | 250GF |
| FRG | 300-16F | RGEF | 300 | MF-RG | 300 | 16R | 300G | RLD16P | 300GF |
| FRG | 400-16F | RGEF | 400 | MF-RG | 400 | 16R | 400G | RLD16P | 400GF |
| FRG | 500-16F | RGEF | 500 | MF-RG | 500 | 16R | 500G | RLD16P | 500GF |
| FRG | 600-16F | RGEF | 600 | MF-RG | 600 | 16R | 600G | RLD16P | 600GF |
| FRG | 700-16F | RGEF | 700 | MF-RG | 700 | 16R | 700G | RLD16P | 700GF |
| FRG | 800-16F | RGEF | 800 | MF-RG | 800 | 16R | 800G | RLD16P | 800GF |
| FRG | 900-16F | RGEF | 900 | MF-RG | 900 | 16R | 900G | RLD16P | 900GF |
| FRG | 1000-16F | RGEF | 1000 | MF-RG | 1000 | 16R | 1000G | RLD16P | 1000GF |
| FRG | 1100-16F | RGEF | 1100 | MF-RG | 1100 | 16R | 1100G | RLD16P | 1100GF |
| FRG | 1200-16F | RGEF | 1200 | -- | -- | 16R | 1200G | RLD16P | 1200GF |
| FRG | 1400-16F | RGEF | 1400 | -- | -- | 16R | 1400G | RLD16P | 1400GF |
| FHT | 050-30F | RHEF | 050 | MF-RHT | 050 | -- | -- | -- | -- |
| FHT | 070-30F | RHEF | 070 | MF-RHT | 070 | -- | -- | -- | -- |
| FHT | 100-30F | RHEF | 100 | MF-RHT | 100 | -- | -- | -- | -- |
| FHT | 200-16F | RHEF | 200 | MF-RHT | 200 | -- | -- | -- | -- |
| FHT | 300-16F | RHEF | 300 | MF-RHT | 300 | -- | -- | -- | -- |
| FHT | 400-16F | RHEF | 400 | MF-RHT | 400 | -- | -- | -- | -- |
| FHT | 450-16F | RHEF | 450 | MF-RHT | 450 | -- | -- | -- | -- |
| FHT | 550-16F | RHEF | 550 | MF-RHT | 550 | -- | -- | -- | -- |
| FHT | 600-16F | RHEF | 600 | MF-RHT | 600 | -- | -- | -- | -- |
| FHT | 650-16F | RHEF | 650 | MF-RHT | 650 | -- | -- | -- | -- |
| FHT | 700-16F | RHEF | 700 | MF-RHT | 700 | -- | -- | -- | -- |
| FHT | 750-16F | RHEF | 750 | MF-RHT | 750 | -- | -- | -- | -- |
| FHT | 800-16F | RHEF | 800 | MF-RHT | 800 | -- | -- | -- | -- |
| FHT | 900-16F | RHEF | 900 | MF-RHT | 900 | -- | -- | -- | -- |
| FHT | 1000-16F | RHEF | 1000 | MF-RHT | 1000 | -- | -- | -- | -- |
| FHT | 1100-16F | RHEF | 1100 | MF-RHT | 1100 | -- | -- | -- | -- |
| FHT | 1300-16F | RHEF | 1300 | MF-RHT | 1300 | -- | -- | -- | -- |
| FHT | 1400-16F | RHEF | 1400 | -- | -- | -- | -- | -- | -- |
| FHT | 1500-16F | RHEF | 1500 | -- | -- | -- | -- | -- | -- |
| FHE | 050-32F | AHEF | 050 | -- | -- | -- | -- | -- | -- |
| FHE | 070-32F | AHEF | 070 | -- | -- | -- | -- | -- | -- |
| FHE | 100-32F | AHEF | 100 | -- | -- | -- | -- | -- | -- |
| FHE | 200-32F | -- | -- | -- | -- | -- | -- | -- | -- |
| FHE | 300-32F | AHEF | 300 | -- | -- | -- | -- | -- | -- |
| FHE | 500-32F | AHEF | 500 | -- | -- | -- | -- | -- | -- |
| FHE | 750-32F | AHEF | 750 | -- | -- | -- | -- | -- | -- |
| FHE | 1000-32F | AHEF | 1000 | -- | -- | -- | -- | -- | -- |
| FRH | 080-250VF | TRF | 250-080T | -- | -- | 250R | 080 | HVR250P | 080CF |
| FRH | 110-250VF | -- | -- | -- | -- | -- | -- | -- | -- |
| FRH | 120-250VF | TRF | 250-120 | MF-RX | 012/250 | 250R | 120 | HVR250P | 120CF |
| FRH | 145-250VF | TRF | 250-145 | MF-RX | 014/250 | 250R | 145 | HVR250P | 145CF |
| FRH | 180-250XF | TRF | 250-180 | MF-RX | 018/250 | 250R | 180 | HVR250P | 180CF |
| FRH | 150-600MF | TRF | 600-150 | MF-R | 015/600 | 600R | 150 | HVR600P | 150CF |
| FRH | 160-600MF | -- | -- | -- | -- | -- | -- | -- | -- |
| FRH | 160-600VF | TRF | 600-160 | MF-R | 016/600 | 600R | 160 | HVR600P | 160CF |
| FRH | 200-600VF | -- | -- | -- | -- | -- | -- | -- | -- |
| FRH | 250-600VF | TRF | 600-250 | -- | -- | -- | -- | -- | -- |
| FRH | 400-600F | TRF | 600-400 | -- | -- | -- | -- | -- | -- |

| Fuzetec | | Tyco (Raychem) | | Bourns | | Littelfuse | | Polytronics | |
|---------|----------|----------------|-------|--------|---------|------------|----|-------------|------|
| FRV | 005-240F | LVR | 005NS | MF-RM | 005/240 | -- | -- | -- | -- |
| FRV | 008-240F | LVR | 008NS | MF-RM | 008/240 | -- | -- | -- | -- |
| FRV | 012-240F | LVR | 012S | MF-RM | 012/240 | -- | -- | -- | -- |
| FRV | 016-240F | LVR | 016S | MF-RM | 016/240 | -- | -- | -- | -- |
| FRV | 025-240F | LVR | 025S | MF-RM | 025/240 | -- | -- | -- | -- |
| FRV | 033-240F | LVR | 033S | MF-RM | 033/240 | -- | -- | -- | -- |
| FRV | 040-240F | LVR | 040S | MF-RM | 040/240 | -- | -- | -- | -- |
| FRV | 055-240F | LVR | 055S | MF-RM | 055/240 | -- | -- | -- | -- |
| FRV | 075-240F | LVR | 075S | -- | -- | -- | -- | -- | -- |
| FRV | 100-240F | LVR | 100S | -- | -- | -- | -- | -- | -- |
| FRV | 125-240F | LVR | 125S | -- | -- | -- | -- | -- | -- |
| FRV | 150-240F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRV | 200-240F | LVR | 200S | -- | -- | -- | -- | -- | -- |
| FRVL | 010-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRVL | 017-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRVL | 020-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRVL | 025-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRVL | 030-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRVL | 040-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRVL | 050-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRVL | 065-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRVL | 070-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRVL | 075-120F | LVRL | 075S | -- | -- | -- | -- | -- | -- |
| FRVL | 090-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRVL | 100-120F | LVRL | 100S | -- | -- | -- | -- | -- | -- |
| FRVL | 110-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRVL | 125-120F | LVRL | 125S | -- | -- | -- | -- | -- | -- |
| FRVL | 130-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRVL | 135-120F | LVRL | 135S | -- | -- | -- | -- | -- | -- |
| FRVL | 160-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRVL | 185-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRVL | 200-120F | LVRL | 200S | -- | -- | -- | -- | -- | -- |
| FRVL | 250-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRVL | 300-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FRVL | 375-120F | -- | -- | -- | -- | -- | -- | -- | -- |
| FSR | 120F | SRP | 120F | MF-S | 120 | -- | -- | STD | 120F |
| FSR | 175F | SRP | 175F | MF-S | 175 | -- | -- | STD | 175F |
| FSR | 200F | SRP | 200F | MF-S | 200 | -- | -- | STD | 200F |
| FSR | 350F | SRP | 350F | MF-S | 350 | -- | -- | STD | 350F |
| FSR | 420F | SRP | 420F | MF-S | 420 | -- | -- | STD | 420F |
| FLR | 190F | LR4 | 190F | MF-LR | 190 | -- | -- | LRD | 190F |
| FLR | 260F | LR4 | 260F | MF-LR | 260 | -- | -- | LRD | 260F |
| FLR | 380F | LR4 | 380F | MF-LR | 380 | -- | -- | LRD | 380F |
| FLR | 450F | LR4 | 450F | MF-LR | 450 | -- | -- | LRD | 450F |
| FLR | 550F | LR4 | 550F | MF-LR | 550 | -- | -- | LRD | 550F |
| FLR | 600F | LR4 | 600F | MF-LR | 600 | -- | -- | LRD | 600F |
| FLR | 730F | LR4 | 730F | MF-LR | 730 | -- | -- | LRD | 730F |
| FLR | 900F | LR4 | 900F | MF-LR | 900 | -- | -- | LRD | 900F |

| Fuzetec | | Tyco (Raychem) | | Bourns | | Littelfuse | | Polytronics | |
|---------|---------------|----------------|---------|---------|---------|------------|--------|-------------|----------|
| FSMD* | 030-2920-R | SMD | 030F | MF-SM | 030 | 2920L | 030 | SMD2920P | 030TF |
| FSMD* | 050-2920-R | SMD | 050F | MF-SM | 050 | 2920L | 050 | SMD2920P | 050TF |
| FSMD* | 075-2920-R | SMD | 075F | MF-SM | 075 | 2920L | 075 | SMD2920P | 075TF |
| FSMD* | 075-60-2920-R | SMD | 075F/60 | MF-SM | 075/60 | 2920L | 075/60 | SMD2920P | 075TF/60 |
| FSMD* | 100-2920-R | SMD | 100F | MF-SM | 100/33 | 2920L | 100 | SMD2920P | 100TF |
| FSMD | 110-60-2920R | -- | -- | -- | -- | 2920L | 110/60 | SMD2920P | 110TF |
| FSMD* | 125-2920-R | SMDC | 125F/33 | MF-SM | 125 | 2920L | 125 | SMD2920P | 125TF |
| FSMD** | 150-2920-R | SMD | 150F/33 | MF-SM | 150/33 | 2920L | 150 | SMD2920P | 150TF |
| FSMD** | 185-2920-R | SMD | 185F/33 | MF-SM | 185/33 | 2920L | 185 | SMD2920P | 185TF |
| FSMD** | 200-2920-R | SMD | 200F | MF-SM | 200 | 2920L | 200 | -- | -- |
| FSMD** | 200-24-2920-R | SMD | 200F/24 | -- | -- | 2920L | 200/24 | SMD2920P | 200TF/24 |
| FSMD** | 250-2920-R | SMD | 250F/15 | MF-SM | 250 | 2920L | 250 | SMD2920P | 250TF |
| FSMD** | 260-2920-R | SMD | 260F | MF-SM | 260 | 2920L | 260 | SMD2920P | 260TF |
| FSMD* | 260-24-2920R | -- | -- | -- | -- | 2920L | 260/24 | SMD2920P | 260TF/24 |
| FSMD** | 300-2920-R | SMD | 300F | MF-SM | 300 | 2920L | 300 | -- | -- |
| FSMD** | 300-15-2920R | SMD | 300F/15 | -- | -- | 2920L | 300/15 | SMD2920P | 300TF/15 |
| FSMD** | 300-24-2920R | SMDC | 300F/24 | MF-LSMF | 300/24X | -- | -- | -- | -- |
| FSMD | 330-2920R | -- | -- | -- | -- | 2920L | 330/24 | SMD2920P | 330TF |
| FSMD* | 400-16-2920R | -- | -- | -- | -- | -- | -- | SMD2920P | 400TF |
| FSMD* | 500-16-2920R | -- | -- | -- | -- | 2920L | 500/16 | SMD2920P | 500TF/16 |
| FSMD | 030-2016-R | -- | -- | -- | -- | 2016L | 030 | SMD2016P | 030TF |
| FSMD | 050-2016R | -- | -- | -- | -- | 2016L | 050 | SMD2016P | 050TF |
| FSMD | 075-2016R | -- | -- | -- | -- | 2016L | 075/60 | SMD2016P | 075TF |
| FSMD | 100-2016-R | -- | -- | -- | -- | 2016L | 100 | SMD2016P | 100TF |
| FSMD | 100-33-2016-R | -- | -- | -- | -- | 2016L | 100/33 | SMD2016P | 100TF/33 |
| FSMD | 150-2016-R | -- | -- | -- | -- | 2016L | 150 | SMD2016P | 150TF |
| FSMD | 200-2016-R | -- | -- | -- | -- | 2016L | 200 | SMD2016P | 200TF |
| FSMD | 010-R | miniSMDC | 010F | MF-MSMF | 010 | 1812L | 010 | SMD1812P | 010TF |
| FSMD | 014-R | miniSMDC | 014F | MF-MSMF | 014 | 1812L | 014 | SMD1812P | 014TF |
| FSMD | 020-R | miniSMDC | 020F | MF-MSMF | 020 | 1812L | 020 | SMD1812P | 020TF |
| FSMD | 020-60-R | -- | -- | MF-MSMF | 020/60 | 1812L | 020/60 | SMD1812P | 020TF-J |
| FSMD | 030-R | miniSMDC | 030F | MF-MSMF | 030 | -- | -- | -- | -- |
| FSMD | 035-R | -- | -- | -- | -- | -- | -- | -- | -- |
| FSMD | 035-30-R | -- | -- | -- | -- | 1812L | 035/30 | SMD1812P | 035TF/30 |
| FSMD | 050-R | miniSMDC | 050F | MF-MSMF | 050 | 1812L | 050 | SMD1812P | 050TF |
| FSMD | 050-30-R | -- | -- | MF-MSMF | 050/30X | 1812L | 050/30 | SMD1812P | 050TF/30 |
| FSMD | 075-R | miniSMDC | 075F | MF-MSMF | 075 | 1812L | 075 | SMD1812P | 075TF |
| FSMD | 075-24R | miniSMDC | 075F/24 | MF-MSMF | 075/24 | 1812L | 075/24 | SMD1812P | 075TF/24 |
| FSMD | 075-33R | miniSMDC | 075F/33 | MF-MSMF | 075/33X | 1812L | 075/33 | SMD1812P | 075TF/33 |
| FSMD | 110-R | miniSMDC | 110F | MF-MSMF | 110 | 1812L | 110 | SMD1812P | 110TF |
| FSMD | 110-16-R | miniSMDC | 110F/16 | MF-MSMF | 110/16 | 1812L | 110/16 | SMD1812P | 110TF/16 |
| FSMD | 110-24R | miniSMDC | 110F/24 | MF-MSMF | 110/24X | 1812L | 110/24 | SMD1812P | 110TF/24 |
| FSMD | 110-33R | -- | -- | -- | -- | 1812L | 110/33 | SMD1812P | 110TF/33 |
| FSMD | 125-R | miniSMDC | 125F | MF-MSMF | 125 | 1812L | 125/6 | -- | -- |
| FSMD | 125-16R | miniSMDC | 125F/16 | -- | -- | 1812L | 125/16 | SMD1812P | 125TF/16 |
| FSMD | 150-R | miniSMDC | 150F | MF-MSMF | 150 | 1812L | 150 | SMD1812P | 150TF/8 |
| FSMD | 150-12R | miniSMDC | 150F/12 | MF-MSMF | 150/12 | 1812L | 150/12 | SMD1812P | 150TF/12 |
| FSMD | 150-24R | miniSMDC | 150F/24 | MF-MSMF | 150/24X | 1812L | 150/24 | SMD1812P | 150TF/24 |
| FSMD | 160-R | miniSMDC | 160F | MF-MSMF | 160 | 1812L | 160 | SMD1812P | 160TF/8 |
| FSMD | 160-12R | -- | -- | -- | -- | 1812L | 160/12 | -- | -- |

| Fuzetec | Tyco (Raychem) | Bourns | Littelfuse | Polytronics |
|--------------------|--------------------|-----------------|--------------|-------------------|
| FSMD 160-16R | -- | -- | -- | -- |
| FSMD 160-24R | -- | -- | -- | -- |
| FSMD 200R | miniSMDC 200F | MF-MSMF 200 | 1812L 200TH | SMD1812P 200TFT |
| FSMD 200-16R | miniSMDC 200F/16 | -- | 1812L 200/16 | SMD1812P 200TF/16 |
| FSMD 260R | miniSMDC 260F | MF-MSMF 260 | 1812L 260TH | SMD1812P 260TFT |
| FSMD 260-13R | miniSMDC 260F/13.2 | -- | 1812L 260/12 | SMD1812P 260TF/12 |
| FSMD 260-16R | miniSMDC 260F/16 | -- | 1812L 260/16 | SMD1812P 260TF/16 |
| FSMD 300R | miniSMDC 300F | -- | 1812L 300 | SMD1812P 300TFT |
| FSMD 005-1210-R | microSMDC 005F | MF-USMF 005 | 1210L 005 | SMD1210P 005TF |
| FSMD 010-1210-R | microSMDC 010F | MF-USMF 010 | 1210L 010 | SMD1210P 010TF |
| FSMD 020-1210-R | -- | MF-USMF 020 | 1210L 020 | SMD1210P 020TF |
| FSMD 035-1210-R | microSMDC 035F | MF-USMF 035 | 1210L 035 | SMD1210P 035TF |
| FSMD 050-1210-R | microSMDC 050F | MF-USMF 050 | 1210L 050 | SMD1210P 050TF |
| FSMD 075-1210-R | microSMDC 075F | MF-USMF 075 | 1210L 075 | SMD1210P 075TF |
| FSMD 075-24-1210R | -- | -- | 1210L 075/24 | SMD1210P 075TF/24 |
| FSMD 110-1210R | microSMDC 110F | MF-USMF 110 | 1210L 110 | SMD1210P 110TFT |
| FSMD 110-16-1210R | -- | -- | 1210L 110/16 | SMD1210P 110TF/16 |
| FSMD 150-1210R | microSMDC 150F | MF-USMF 150 | 1210L 150 | SMD1210P 150TFT |
| FSMD 175-1210R | microSMDC 175F | MF-USMF 175 | 1210L 175 | SMD1210P 175TF |
| FSMD 200-1210R | microSMDC 200F | -- | 1210L 200 | SMD1210P 200TF |
| FSMD 005-1206-R | -- | -- | 1206L 005/60 | SMD1206P 005TF |
| FSMD 010-1206-R | nanoSMDC 010F | -- | 1206L 010/60 | SMD1206P 010TF |
| FSMD 012-1206-R | nanoSMDC 012F | MF-NSMF 012 | 1206L 012 | SMD1206P 012TF |
| FSMD 016-1206-R | nanoSMDC 016F | MF-NSMF 016 | 1206L 016 | SMD1206P 016TF |
| FSMD 020-1206-R | nanoSMDC 020F | MF-NSMF 020X | 1206L 020 | SMD1206P 020TF/24 |
| FSMD 025-1206-R | nanoSMDC 025F | MF-NSMF 025X | 1206L 025 | SMD1206P 025TF |
| FSMD 025-24-1206-R | -- | -- | -- | SMD1206P 025TF/24 |
| FSMD 035-1206-R | nanoSMDC 035F | MF-NSMF 035X | 1206L 035/16 | SMD1206P 035TF/16 |
| FSMD 035-30-1206R | -- | -- | 1206L 035/30 | SMD1206P 035TF/30 |
| FSMD 050-1206-R | -- | -- | 1206L 050 | SMD1206P 050TF |
| FSMD 050-24-1206R | nanoSMDC 050F/13.2 | MF-NSMF 050 | 1206L 050/15 | SMD1206P 050TF/15 |
| FSMD 075-1206R | nanoSMDC 075F | MF-NSMF 075 | 1206L 075TH | SMD1206P 075TFT |
| FSMD 075-16-1206R | -- | -- | 1206L 075/16 | SMD1206P 075TF/16 |
| FSMD 100-1206R | -- | -- | -- | -- |
| FSMD 110-1206R | nanoSMDC 110F | MF-NSMF 110 | 1206L 110TH | SMD1206P 110TFT |
| FSMD 110-16-1206R | -- | -- | -- | -- |
| FSMD 150-1206R | nanoSMDC 150F | MF-NSMF 150 | 1206L 150TH | SMD1206P 150TFT |
| FSMD 200-1206R | nanoSMDC 200F | MF-NSMF 200 | 1206L 200 | SMD1206P 200TF |
| FSMD 010-0805-R | picoSMDC 010S | MF-PSMF 010X | 0805L 010 | SMD0805P 010TF |
| FSMD 010-24-0805-R | -- | MF-PSMF 010/24X | 0805L 010/24 | SMD0805P 010TF/24 |
| FSMD 020-0805-R | picoSMDC 020S | MF-PSMF 020X | 0805L 020 | SMD0805P 020TF |
| FSMD 035-0805-R | picoSMDC 035S | MF-PSMF 035X | 0805L 035 | SMD0805P 035TF |
| FSMD 050-0805R | picoSMDC 050S | MF-PSMF 050X | 0805L 050 | SMD0805P 050TF |
| FSMD 050-9-0805R | -- | -- | -- | -- |
| FSMD 075-0805R | picoSMDC 075S | MF-PSMF 075X | 0805L 075 | SMD0805P 075TF |
| FSMD 100-0805R | -- | -- | 0805L 100 | SMD0805P 100TFT |
| FSMD 110-0805R | picoSMDC 110S | MF-PSMF 110X | 0805L 110 | SMD0805P 110TF |
| FSMD 001-0603-R | -- | -- | -- | -- |
| FSMD 002-0603-R | -- | -- | -- | -- |
| FSMD 003-0603-R | -- | -- | -- | -- |
| FSMD 004-0603-R | -- | -- | 0603L 004 | SMD0603P 004TF |
| FSMD 005-0603-R | femtoSMDC 005F | -- | -- | -- |
| FSMD 008-0603-R | femtoSMDC 008F | -- | -- | -- |
| FSMD 010-0603-R | femtoSMDC 010F | MF-FSMF 010X | 0603L 010 | SMD0603P 010TF |
| FSMD 012-0603-R | femtoSMDC 012F | -- | -- | -- |
| FSMD 016-0603-R | femtoSMDC 016F | -- | -- | -- |
| FSMD 020-0603-R | femtoSMDC 020F | MF-FSMF 020X | 0603L 020 | SMD0603P 020TF |
| FSMD 025-0603-R | -- | MF-FSMF 025X | 0603L 025 | SMD0603P 025TF |


| Fuzetec | | Tyco (Raychem) | | Bourns | | Littelfuse | | Polytronics | |
|---------|------------|----------------|-------|---------|------|------------|---------|-------------|---------|
| FSMD | 050-1206RZ | -- | -- | -- | -- | -- | -- | SMD1206P | 050SLR |
| FSMD | 075-1206RZ | -- | -- | -- | -- | 1206L | 075SL | SMD1206P | 075SLR |
| FSMD | 110-1206RZ | -- | -- | -- | -- | 1206L | 110SL | SMD1206P | 110SLR |
| FSMD | 150-1206RZ | -- | -- | MF-NSML | 150 | 1206L | 150SL | SMD1206P | 150SLR |
| FSMD | 175-1206RZ | nanoSMD | 175LR | MF-NSML | 175 | 1206L | 175SL | SMD1206P | 175SLR |
| FSMD | 200-1206RZ | nanoSMD | 200LR | MF-NSML | 200 | 1206L | 200SL | SMD1206P | 200SLR |
| FSMD | 260-1206RZ | -- | -- | MF-NSML | 260 | 1206L | 260SLTH | SMD1206P | 260SLR |
| FSMD | 300-1206RZ | -- | -- | MF-NSML | 300 | 1206L | 300SLTH | SMD1206P | 300SLR |
| FSMD | 350-1206RZ | nanoSMD | 350LR | MF-NSML | 350 | 1206L | 350SLTH | SMD1206P | 350SLRT |
| FSMD | 380-1206RZ | nanoSMD | 380LR | MF-NSML | 380 | 1206L | 380SLTH | SMD1206P | 380SLR |
| FSMD | 400-1206RZ | nanoSMD | 400LR | MF-NSML | 400 | 1206L | 400SL | SMD1206P | 400SLR |
| FSMD | 450-1206RZ | nanoSMD | 450LR | MF-NSML | 450 | 1206L | 450SL | SMD1206P | 450SLR |
| FSMD | 500-1206RZ | nanoSMD | 500LR | MF-NSML | 500 | -- | -- | SMD1206P | 500SLR |
| FSMD | 600-1206RZ | nanoSMD | 600LR | MF-NSML | 600 | -- | -- | SMD1206P | 600SLR |
| FSMD | 075-0805RZ | -- | -- | MF-PSML | 075 | 0805L | 075SL | SMD0805P | 075SLR |
| FSMD | 110-0805RZ | -- | -- | MF-PSML | 110 | 0805L | 110SL | SMD0805P | 110SLR |
| FSMD | 125-0805RZ | -- | -- | -- | -- | -- | -- | SMD0805P | 125SLR |
| FSMD | 150-0805RZ | -- | -- | MF-PSML | 150 | 0805L | 150SL | SMD0805P | 150SLR |
| FSMD | 175-0805RZ | -- | -- | MF-PSML | 175 | 0805L | 175SL | SMD0805P | 175SLR |
| FSMD | 200-0805RZ | -- | -- | MF-PSML | 200 | 0805L | 200SLTH | SMD0805P | 200SLRT |
| FSMD | 300-0805RZ | -- | -- | MF-PSML | 300 | 0805L | 300SL | SMD0805P | 300SLRT |
| FSMD | 350-0805RZ | -- | -- | MF-PSML | 350 | -- | -- | -- | -- |
| FSMD | 025-0603RZ | -- | -- | MF-FSMF | 025X | -- | -- | SMD0603P | 025TF |
| FSMD | 035-0603RZ | -- | -- | MF-FSMF | 035X | -- | -- | SMD0603P | 035TF |
| FSMD | 050-0603RZ | -- | -- | MF-FSMF | 050X | 0603L | 050SL | SMD0603P | 050SLR |
| FSMD | 075-0603RZ | -- | -- | -- | -- | 0603L | 075SL | SMD0603P | 075SLR |
| FSMD | 100-0603RZ | -- | -- | -- | -- | 0603L | 100SL | SMD0603P | 100SLR |
| FSMD | 010-0402RZ | -- | -- | -- | -- | 0402L | 010SL | SMD0402P | 010SLR |
| FSMD | 020-0402RZ | -- | -- | -- | -- | 0402L | 020SL | SMD0402P | 020SLR |
| FSMD | 035-0402RZ | -- | -- | -- | -- | 0402L | 035SL | SMD0402P | 035SLR |
| FSMD | 050-0402RZ | -- | -- | -- | -- | 0402L | 050SL | SMD0402P | 050SLR |

Thermal Derating for PPTC Device at Various Ambient Temperatures.

| FUZETEC PPTC Family | -40°C | -20°C | 0°C | 23°C | 30°C | 40°C | 50°C | 60°C | 70°C | 85°C | 125°C |
|---------------------------------------------|-------|-------|------|------|------|------|------|------|------|------|-------|
| FRX-60/90 | 158% | 138% | 119% | 100% | 90% | 81% | 70% | 60% | 50% | 36% | - |
| FRU | 145% | 130% | 115% | 100% | 92% | 84% | 76% | 70% | 61% | 50% | - |
| FRT | 148% | 134% | 120% | 100% | 98% | 90% | 84% | 78% | 70% | 59% | - |
| FUSB | 145% | 130% | 115% | 100% | 91% | 83% | 78% | 70% | 61% | 50% | - |
| FRG | 148% | 132% | 116% | 100% | 91% | 84% | 76% | 69% | 60% | 48% | - |
| FHT | 143% | 129% | 116% | 100% | 93% | 87% | 80% | 72% | 65% | 55% | 26% |
| FHE | 143% | 130% | 115% | 100% | 92% | 88% | 80% | 72% | 65% | 55% | 28% |
| FRHV | 158% | 138% | 119% | 100% | 92% | 83% | 73% | 64% | 54% | 40% | - |
| FRVL | 158% | 138% | 119% | 100% | 90% | 80% | 70% | 60% | 50% | 38% | - |
| FRV | 150% | 134% | 116% | 100% | 90% | 81% | 74% | 65% | 58% | 44% | - |
| FSMD-2920 | 145% | 130% | 115% | 100% | 92% | 85% | 78% | 70% | 62% | 50% | - |
| FSMD-2016 | 157% | 133% | 118% | 100% | 90% | 80% | 70% | 60% | 51% | 36% | - |
| FSMD-1812 | 145% | 130% | 116% | 100% | 91% | 84% | 78% | 69% | 61% | 50% | - |
| FSMD-1210 | 145% | 130% | 115% | 100% | 92% | 83% | 76% | 70% | 62% | 50% | - |
| FSMD-1206 | 145% | 130% | 115% | 100% | 92% | 84% | 78% | 69% | 62% | 50% | - |
| FSMD-0805 | 145% | 130% | 116% | 100% | 91% | 84% | 76% | 69% | 61% | 50% | - |
| FSMD-0603 | 157% | 137% | 118% | 100% | 89% | 80% | 70% | 60% | 51% | 37% | - |
| FSR | 152% | 135% | 118% | 100% | 90% | 82% | 74% | 65% | 56% | 42% | - |
| FLR | 147% | 132% | 117% | 100% | 94% | 86% | 80% | 71% | 61% | 52% | - |
| Low Rho FSMD-1206/0805/0603/0402 | 145% | 130% | 115% | 100% | 92% | 84% | 77% | 69% | 61% | 50% | - |

Pad Layouts 、 Solder Reflow Recommendations

The dimensions in the table below provide the recommended pad layout for Surface Mount Device in different footprints.



| Pad dimensions (Millimeter) | | | |
|-----------------------------|--------------|--------------|--------------|
| Device | A Nominal | B Nominal | C Nominal |
| All 2920 Series | 5.10 | 2.30 | 5.60 |
| All 2016 Series | 3.40 | 1.50 | 4.60 |
| All 1812 Series | 3.45 | 1.78 | 3.50 |
| All 1210 Series | 2.00 | 1.00 | 2.80 |
| All 1206 Series | 2.00 | 1.00 | 1.90 |
| All 0805 Series | 1.20 | 1.00 | 1.50 |
| All 0603 Series | 0.80 | 0.60 | 0.80 |
| All 0402 Series | 0.40 | 0.60 | 0.70 |

| Profile Feature | Pb-Free Assembly |
|----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Average Ramp-Up Rate (T_{smax} to T_p) | 3°C/second max. |
| Preheat : Temperature Min (T _{smin}) Temperature Max (T _{smax}) Time (t _{smin} to t _{smax}) | 150°C 200°C 60-180 seconds |
| Time maintained above : Temperature(T _L) Time (t _L) | 217°C 60-150 seconds |
| Peak/Classification Temperature(T_p) : | 260°C |
| Time within 5°C of actual Peak : Temperature (t _p) | 20-40 seconds |
| Ramp-Down Rate : | 6°C/second max. |
| Time 25°C to Peak Temperature : | 8 minutes max. |

Solder reflow


※ Due to "Lead Free" nature, Temperature and Dwelling Time for the soldering zone is higher than those for Regular. This may cause damage to other components.

1. Recommended max paste thickness is 0.25mm.(Nominal)
2. Devices can be cleaned using standard methods and aqueous solvent.
3. Rework use standard industry practices.
4. Storage Environment : < 30°C / 60% RH

Caution :


1. If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.
2. Devices are not designed to be wave soldered to the bottom side of the board

Note 1 : All temperatures refer to the package, measured on the package body surface.

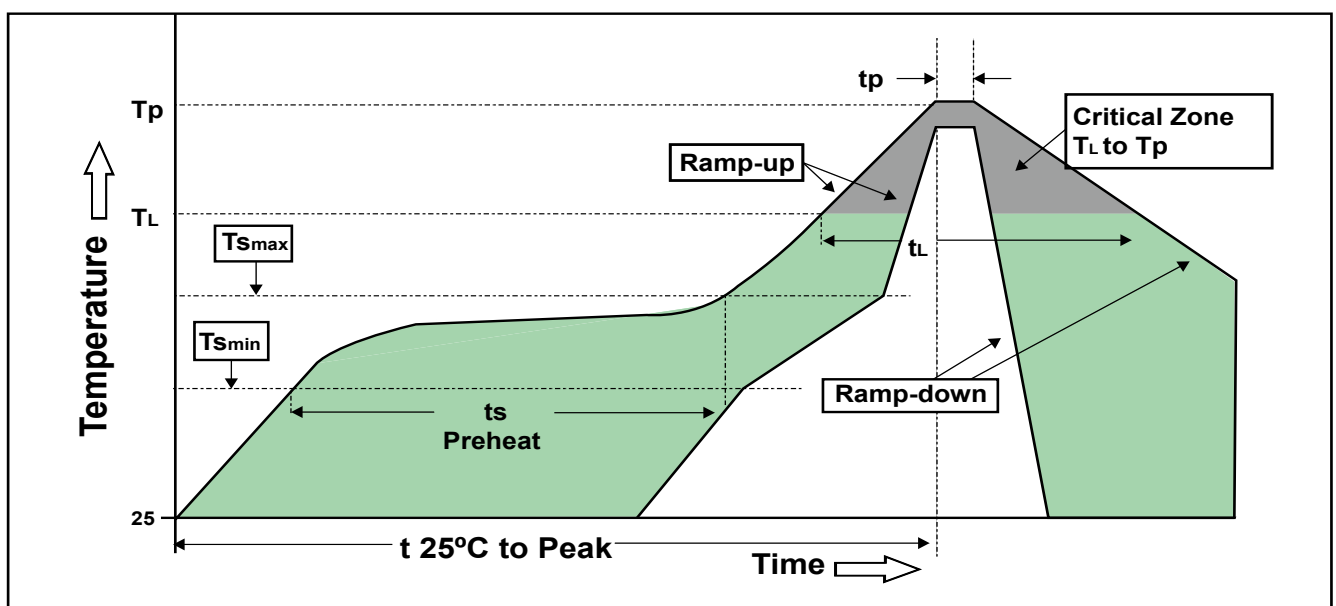

MEMO

A series of horizontal dotted lines for writing a memo.

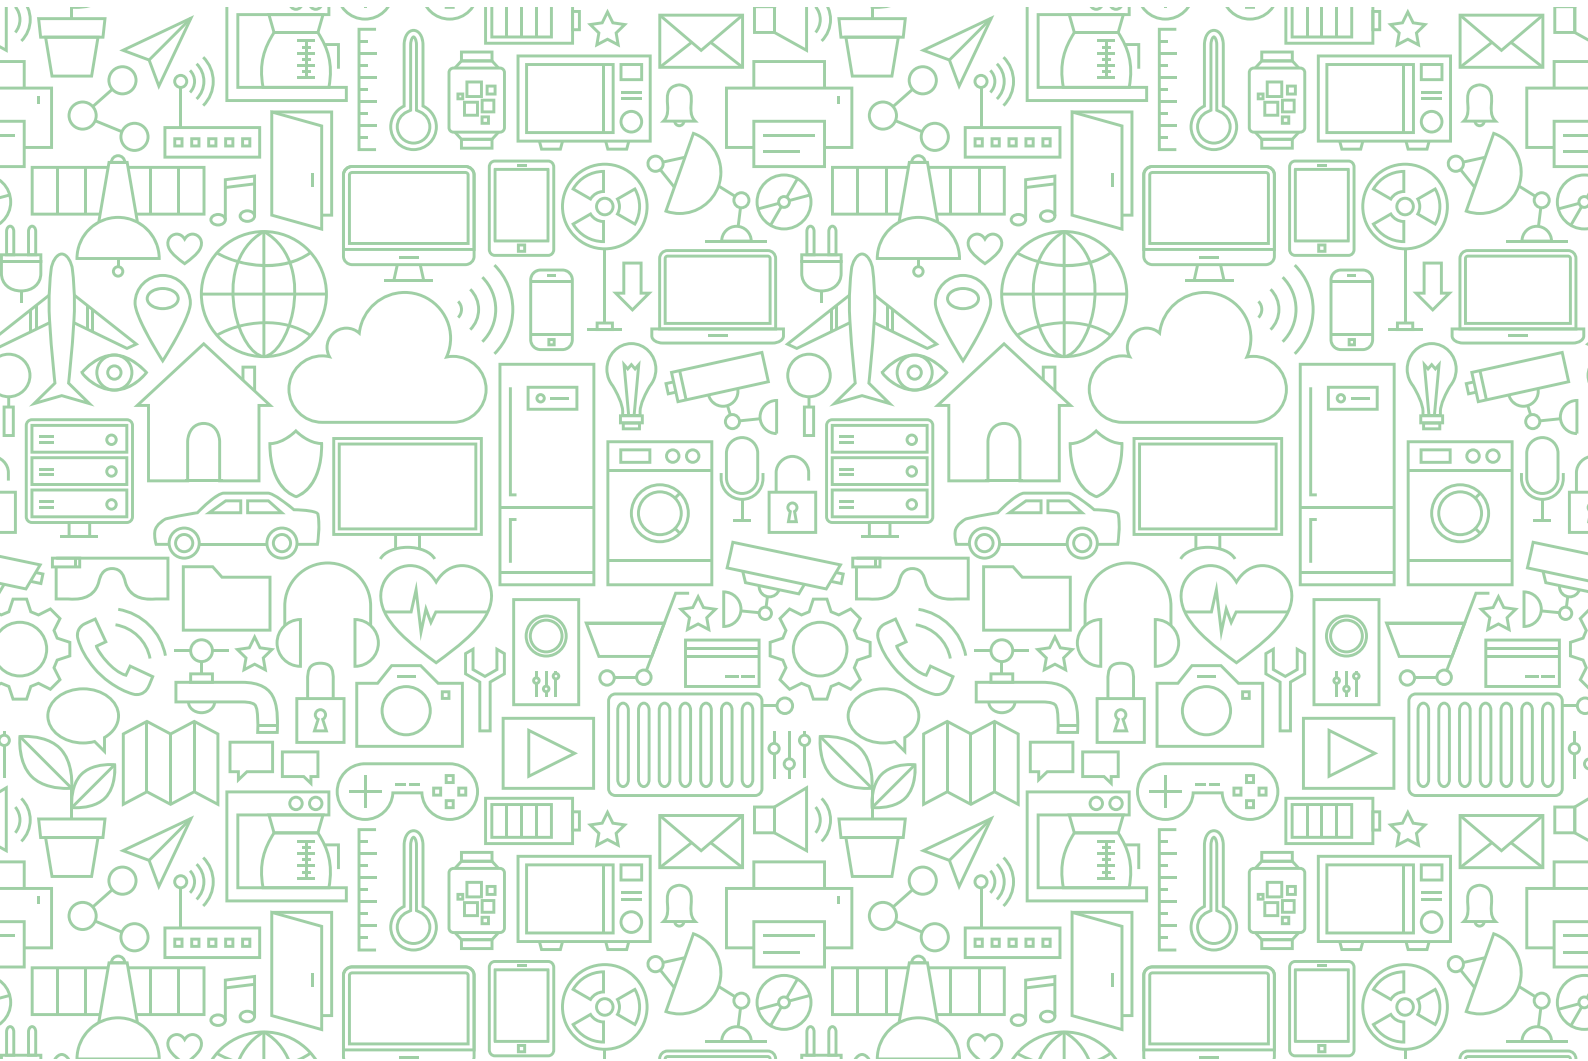

FUZETEC TECHNOLOGY CO., LTD.

**No.60, Wu-Gong 5 Road, Wu Gu Dist.,
New Taipei City, Taiwan 24890**

TEL: 886 2 8990 2113 FAX: 886 2 8990 2110

E-mail: mail@fuzetec.com.tw

Website: www.fuzetec.com

富致科技股份有限公司

24890 新北市五股區五工五路60號



COMPONENTES ELECTRÓNICOS ELCO, S.A.
Cl. de Can Ribes, 10 - 08520 Les Franqueses del Vallès
Telf. 93 879 01 94 - elcobcn@elcocomponentes.com